

# SUZUKI

## PARTS CATALOGUE

# DF140BG

DF140BG  
DF140BZG



## OUTBOARD MOTOR

021

2020-8

E11/E40  
E11 = NORGE

1<sup>ST</sup> EDITION

## PREFACE

When it becomes necessary to replace parts on SUZUKI OUTBOARD MOTORS, always use SUZUKI GENUINE PARTS which have passed a strict inspection which guarantees quality and performance.

This parts catalogue covers the list of all service parts for SUZUKI DF140BG/DF140BZG production start 2020.

### INSTRUCTIONS FOR QUOTING THE CATALOGUE

#### 1. DIMENSIONS

Dimensions of the parts in this catalogue are indicated in unit millimeters.

#### 2. ABBREVIATIONS

Abbreviations used in this catalogue are as follows:

|          |                              |      |                       |
|----------|------------------------------|------|-----------------------|
| AR       | : As required                | NT   | : Number of teeth     |
| ASSY     | : Assembly                   | OPT  | : Optional            |
| E. NO.   | : Engine number              | OS   | : Over size           |
| F. NO.   | : Frame number               | STD  | : Standard            |
| D        | : Diameter of material       | T    | : Thickness           |
| ID       | : Inside diameter            | US   | : Under size          |
| OD       | : Outside diameter           | W    | : Width               |
| L        | : Length                     | W/   | : With                |
| LH(PORT) | : Left hand side             | L, X | : Transom type        |
| RH(STBD) | : Right hand side            | SUS  | : Stainless steel     |
| ~123456  | : Up to E. NO. 14002F-123456 | PTT  | : Power trim and tilt |
| 123456~  | : From E. NO. 14002F-123456  |      |                       |

12 x 34 x 5.6..... Figures in the description column  
| | | show the dimensions of parts.  
ID OD T(or W, L)

→12345-56781 (Parts No.) : indicates that the parts number was changed to 12345-56781 and the new parts are interchangeable with the former ones but the former ones are not interchangeable with new ones.

↔12345-56781 (Parts No.) : indicates that the former and new parts are interchangeable with each other and both are usable.

#### 3. INNER PARTS OF ASSEMBLY

Part name with a dot (.) in front as shown in the description column indicates the component of the assembly also available individually.

#### 4. MODIFICATION NOTICE

A parts bulletin will be sent to you on all occasions when changes in parts occur, including interchangeable modifications between new parts and old ones.

#### 5. NOTE

5-1. There are some different parts from those of production models among spare parts for the administrative reasons and common use of them with other models.

5-2. In respect of rubber hoses and vinyl tubes, please be sure to use them by cutting off according to the length mentioned on parts catalogue or what is actually required on the vehicle.

5-3. Note that the drawings on the illustration page are for ready reference of spare parts number, not to be used as an assembly manual.  
When assembling, use "SUZUKI SERVICE MANUAL".

#### 6. MODEL NAME AND ENGINE NUMBER

| MODEL    | DESTINATION | TYPE   | TRANSOM | COLOR    | ENGINE No.     |
|----------|-------------|--------|---------|----------|----------------|
| DF140BG  | E11, E40    | 14004F | L, X    | YAY, QTN | 14003F-140001~ |
| DF140BZG | E11, E40    | 14004Z | L, X    | YAY, QTN | 14003Z-140001~ |

## PREFACE

Quand il devient nécessaire de remplacer des pièces sur SUZUKI MOTEURS HORSBOARD toujours utiliser les PIECES D'ORIGINE SUZUKI qui ont été soumises à des contrôles de qualité sévères leur garantissant qualité et performance impeccables.

Ce catalogue de pièces détachées couvre la liste de toutes les pièces de rechange pour SUZUKI DF140BG/DF140BZG production start 2020.

### INSTRUCTIONS POUR UTILISER LE CATALOGUE

#### 1. DIMENSIONS

Les dimensions des pièces dans ce catalogue sont indiquées en unités de millimètres.

#### 2. ABREVIATIONS

Les abréviations utilisées dans ce catalogue sont les suivantes:

|        |                      |     |                    |
|--------|----------------------|-----|--------------------|
| AR     | : Comme requis       | NT  | : Nombre de dents  |
| ASSY   | : Assemblage         | OPT | : Sur option       |
| E. NO. | : Numéro du moteur   | OS  | : Sur-dimensionné  |
| F. NO. | : Numéro du chfssis  | T   | : Epaisseur        |
| ID     | : Diamètre intérieur | US  | : Sous-dimensionné |
| OD     | : Diamètre extérieur | W   | : Largeur          |

L : Longueur

LH(PORT) : Côté gauche

RH(STBD) : Côté droit

~123456 : Jusqu'à E. NO. 14002F-123456

123456~ : Depuis E. NO. 14002F-123456

12 x 34 x 5.6..... Les chiffres dans la colonne

| | | remarques montrent les dimensions

ID OD T(or W, L) des pieces comme suit.

→12345-56781 (N° de pieces) : indique que le numéro des pièces a été échangé en 12345-56781 et que les nouvelles pièces sont interchangeables avec les anciennes, mais que celles-ci ne sont pas interchangeables avec les nouvelles.

←12345-56781 (N° de pieces) : indique que les anciennes et nouvelles pièces sont interchangeables les unes avec les autres et sont utilisables chacune.

#### 3. PIECES INTERNES DE L'ASSEMBLAGE

Les numéros de pièces qui comportent un point (.) avant la désignation de pièce détachée indique la pièce interne se rapportant à l'assemblage.

#### 4. AVIS DE MODIFICATION

Un bulletin de pièces détachées vous sera envoyé à tout moment opportun quand des changements de pièces ont lieu, y compris les modifications de pièces interchangeables entre les nouvelles et anciennes pièces.

#### 5. A NOTER

5-1. Il existe certaines pièces différentes de celles de rechange pour les modèles de production vu des raisons administratives et dont l'usage est commun avec celles d'autres modèles.

5-2. Concernant les durites en caoutchouc et les tuyaux en vinyle, ne pas manquer de les couper à la bonne longueur comme indiqué dans le catalogue des pièces détachées ou selon ce qui est utile pour le véhicule affecté.

5-3. Noter que les dessins à la page d'illustration servent à titre de référence pour les numéros de pièces détachées, et non pas comme référence pour l'assemblage. Pour cette dernière opération, se reporter au "MANUEL D'ENTRETIEN SUZUKI".

#### 6. NOM DU MODELE / NUMERO DE SERIE DU MOTEUR

| MODELE   | DESTINATION | TYPE   | HOUTEUR DE       |          | N° DELA MOTEUR |
|----------|-------------|--------|------------------|----------|----------------|
|          |             |        | BARRE D' ARCASSE | COULEUR  |                |
| DF140BG  | E11, E40    | 14004F | L, X             | YAY, QTN | 14003F-140001~ |
| DF140BZG | E11, E40    | 14004Z | L, X             | YAY, QTN | 14003Z-140001~ |

[illegible][illegible]

MILLIMETER → INCH CONVERSION CHART


|    | 0     | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     |
|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 00 | .000  | .039  | .079  | .118  | .157  | .197  | .236  | .276  | .315  | .354  |
| 10 | .394  | .433  | .472  | .512  | .551  | .591  | .630  | .669  | .709  | .748  |
| 20 | .787  | .827  | .866  | .906  | .945  | .984  | 1.024 | 1.063 | 1.102 | 1.142 |
| 30 | 1.181 | 1.220 | 1.260 | 1.299 | 1.339 | 1.378 | 1.417 | 1.457 | 1.496 | 1.535 |
| 40 | 1.575 | 1.614 | 1.654 | 1.693 | 1.732 | 1.772 | 1.811 | 1.850 | 1.890 | 1.929 |
| 50 | 1.969 | 2.008 | 2.047 | 2.087 | 2.126 | 2.165 | 2.205 | 2.214 | 2.283 | 2.323 |
| 60 | 2.362 | 2.402 | 2.441 | 2.480 | 2.520 | 2.559 | 2.598 | 2.638 | 2.677 | 2.717 |
| 70 | 2.756 | 2.795 | 2.835 | 2.874 | 2.913 | 2.953 | 2.992 | 3.031 | 3.071 | 3.110 |
| 80 | 3.150 | 3.189 | 3.228 | 3.268 | 3.307 | 3.346 | 3.386 | 3.425 | 3.465 | 3.504 |
| 90 | 3.543 | 3.583 | 3.622 | 3.661 | 3.701 | 3.740 | 3.780 | 3.819 | 3.858 | 3.898 |

How to read

|    | 0   | 1   | 2   | 3     | 4   |
|----|-----|-----|-----|-------|-----|
| 00 | ... | ... | ... | ...   | ... |
| 10 | ... | ... | ... | ...   | ... |
| 20 | ... | ... | ... | 0.906 | ... |
| 30 | ... | ... | ... | ...   | ... |


23 millimeters equal 0.906 inch

**FIG.111A**

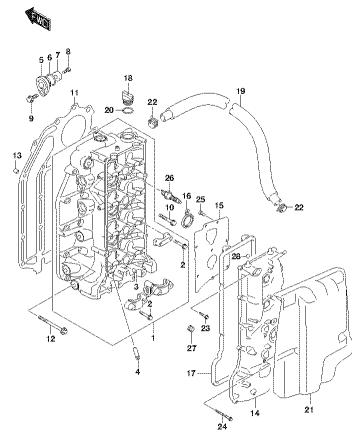


DF1400E\_S11\_30P\_111A  
CYLINDER BLOCK

**FIG.113A**

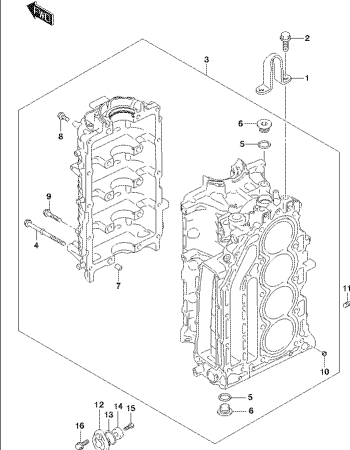


DF1400E\_S11\_30P\_113A  
CYLINDER BLOCK

**FIG.116A**

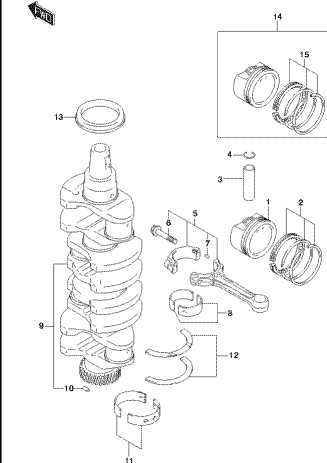


DF1400E\_S11\_30P\_116A  
CRANKSHAFT

**FIG.119A**

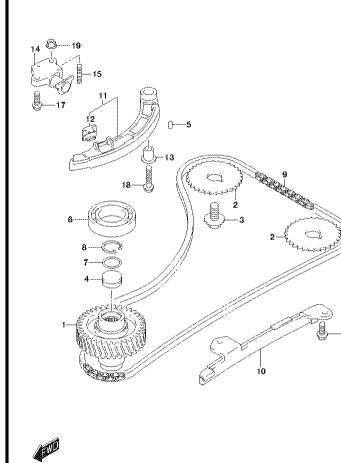


DF1400E\_S11\_30P\_119A  
TIMING GEAR

**FIG.121A**

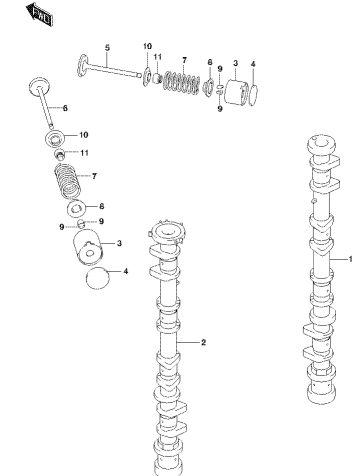


DF1400E\_S11\_30P\_121A  
CAMSHAFT

**FIG.122A**

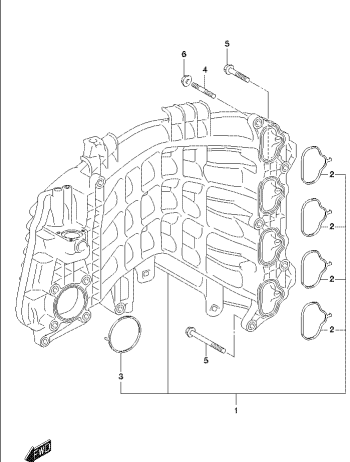


DF1400E\_S11\_30P\_122A  
INTAKE MANIFOLD

**FIG.134A**

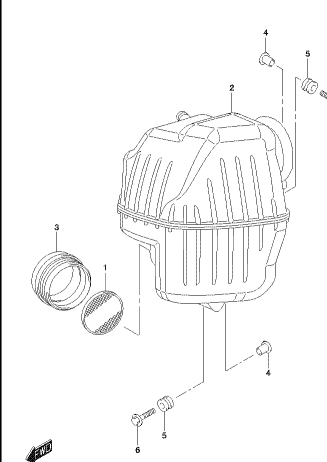


DF1400E\_S11\_30P\_134A  
PISTON

**FIG.136A**

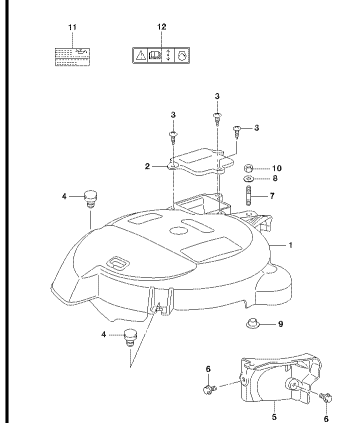


DF1400E\_S11\_30P\_136A  
RING GEAR COVER

**FIG.143A**

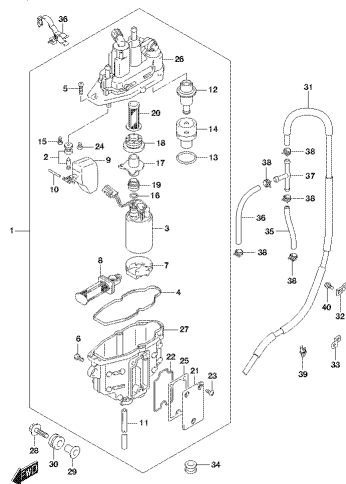


DF1400S\_E11\_001\_140A  
DEL INIECTOR

**FIG.143B**

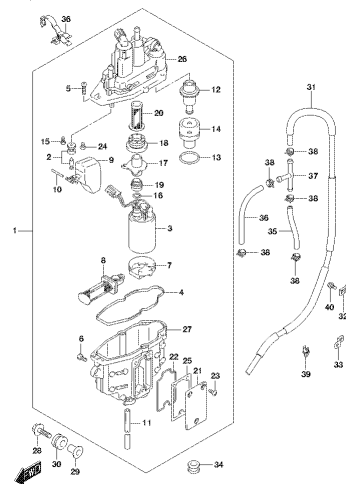


DF1400S\_E11\_001\_140B  
DEL INIECTOR

**FIG.144A**

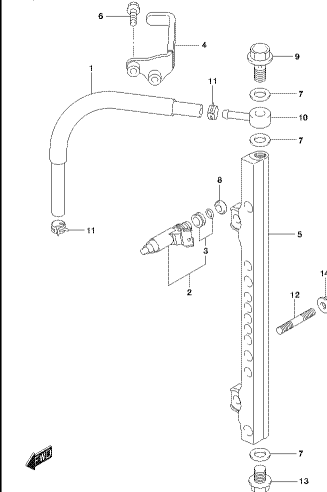


DF1400S\_E11\_001\_144A  
DEL INIECTOR

**FIG.144B**

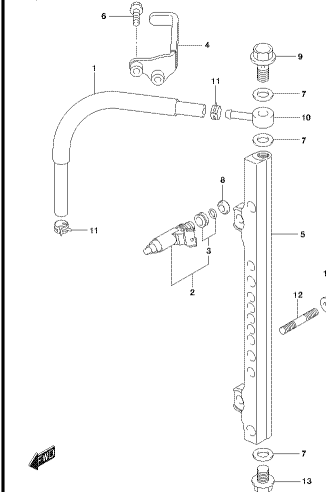


DF1400S\_E11\_001\_144B  
DEL INIECTOR

**FIG.146A**

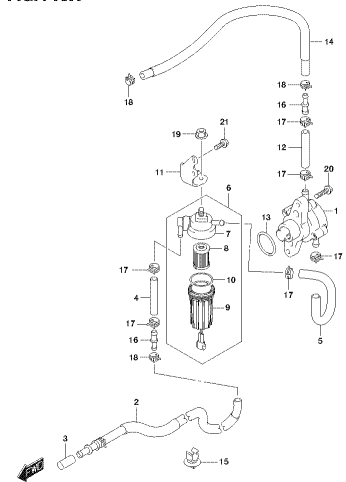


DF1400S\_E11\_001\_146A  
WATER PUMP

**FIG.160A**

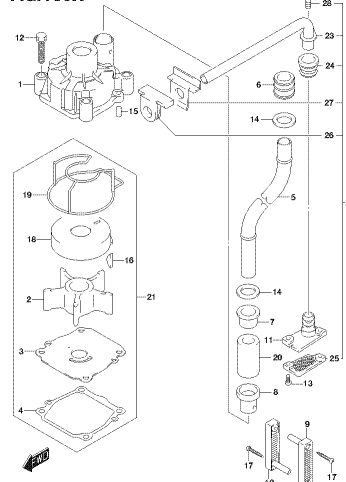


DF1400S\_E11\_001\_160A  
WATER PUMP

**FIG.160B**

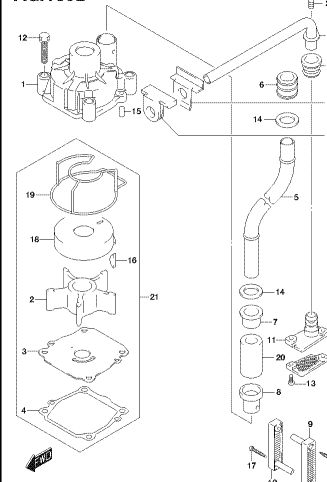


DF1400S\_E11\_001\_160B  
WATER PUMP

**FIG.162A**

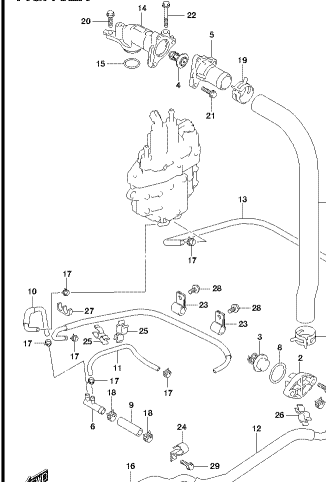


DF1400S\_E11\_001\_162A  
THERMOSTAT

**FIG.163A**




DF1400E\_E11\_U01\_163A  
BOTTLEDOCK

**FIG.175A**

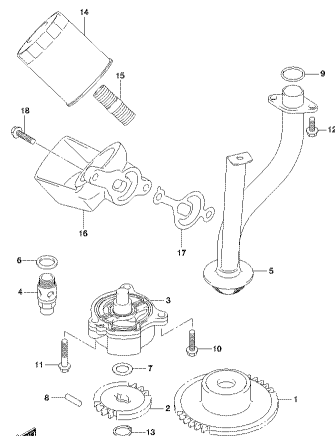


DF1400E\_E11\_U01\_175A  
96\_7248P

**FIG.180A**

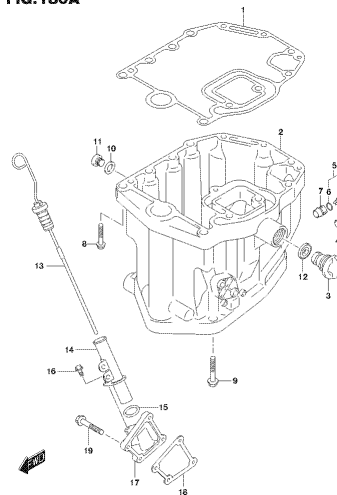


DF1400A\_E11\_U01\_180A  
96\_7248

**FIG.204A**

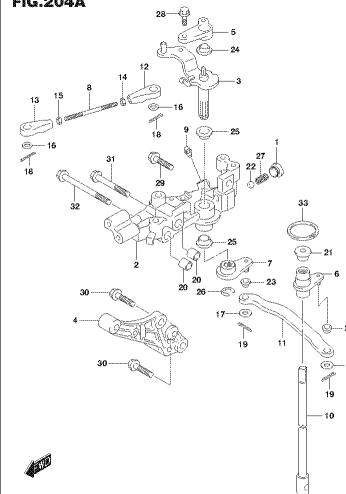


DF1400E\_E11\_U01\_204A  
GLUTTER SHUT

**FIG.210A**

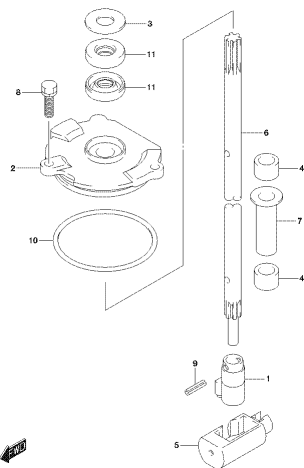


DF1400E\_E11\_U01\_210A  
SHIFT ROD

**FIG.210B**

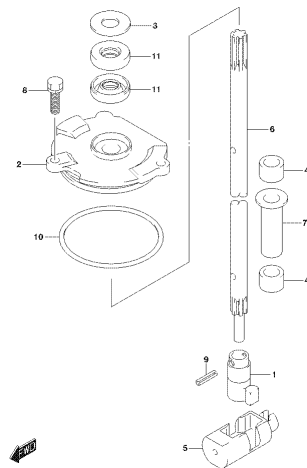


DF1400E\_E11\_U01\_210B  
SHIFT ROD

**FIG.220A**

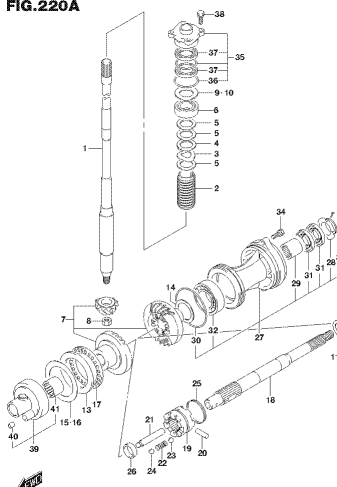

DF1400E\_E11\_U01\_220A  
TRANSMISSION


**FIG.220B**

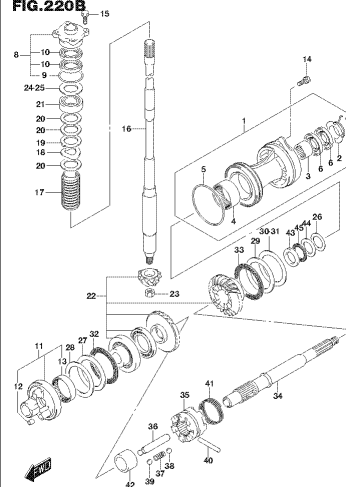

DF1400E\_E11\_U01\_220B  
TRANSMISSION




**FIG.301A**

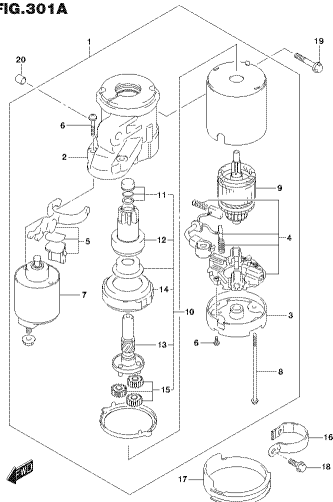


SP4400E\_S11\_L06Y\_300A  
SPARKING MOTOR

**FIG.303A**

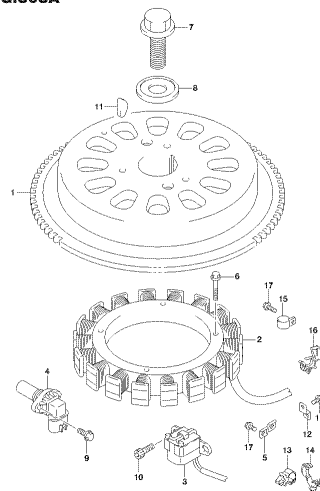


SP4400E\_S11\_L06Y\_300A  
MAGNETO

**FIG.310A**

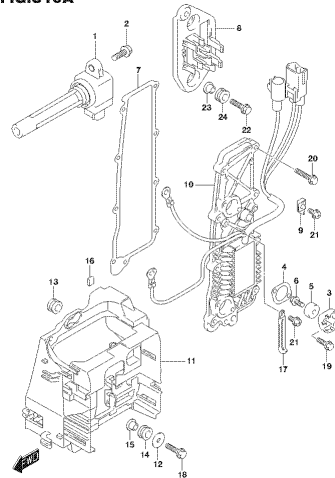


SP4400E\_S11\_L06Y\_3100A  
RECTIFIER

**FIG.315A**

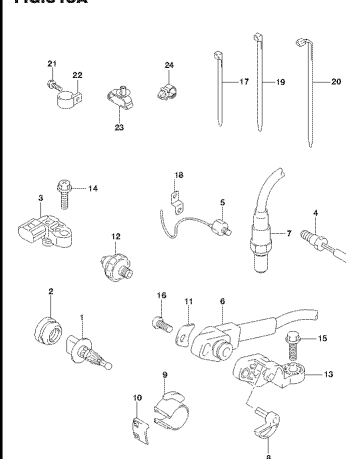


SP4400E\_S11\_L06Y\_3100A  
GENERATOR

**FIG.322A**

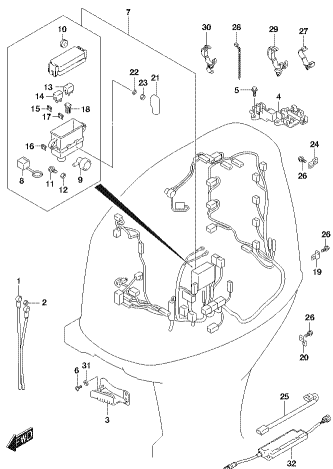


SP4400E\_S11\_L06Y\_320A  
WIRING

**FIG.326A**

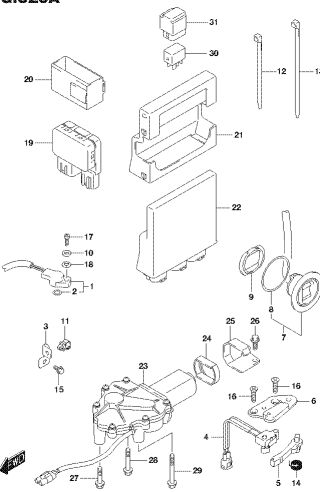


SP4400E\_S11\_L06Y\_320A  
PTT SWITCH/ENGINE CONTROL UNIT

**FIG.331A**

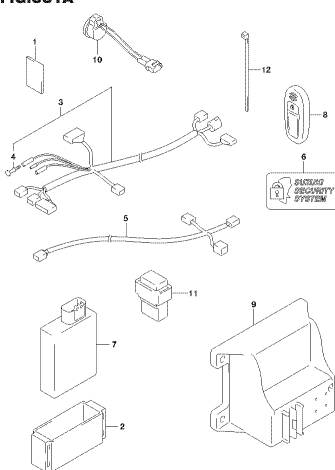

SP4400E\_S11\_L06Y\_3300A  
KEY-LESS START

**FIG.335A**

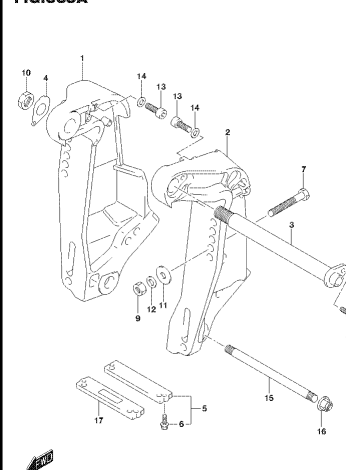

SP4400E\_S11\_L06Y\_3300A  
CLAMP BRACKET

FIG.336A



**FIG.337A**



**FIG.337B**



FIG.340A



**FIG.401A**



**FIG.405A**




FIG.407A



FIG. 407B




**FIG.407C**

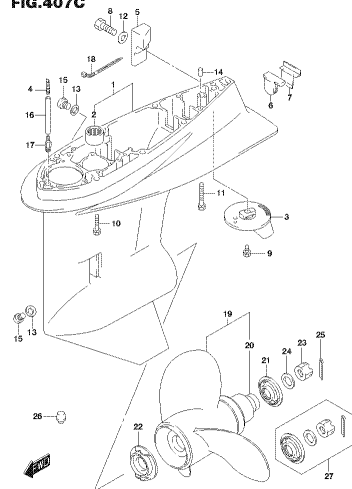


DF1400E\_S11\_S01\_A407  
GEAR CASE

**FIG.407D**

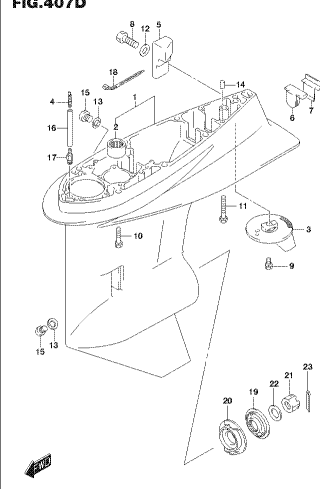


DF1400E\_S11\_S01\_A47D  
GEAR CASE

**FIG.410A**

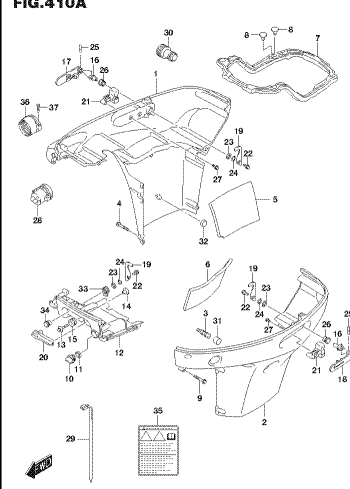


DF1400E\_S11\_S01\_A10A  
BOX COVER

**FIG.420A**

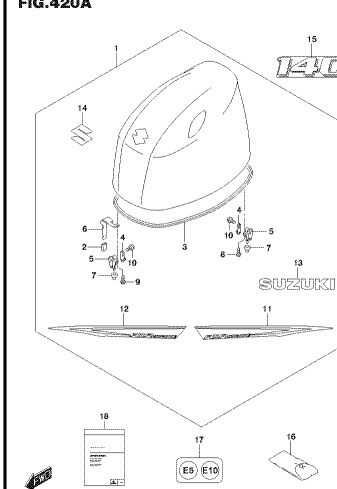


DF1400E\_S11\_S01\_A20A  
PIERCE COVER

**FIG.430A**

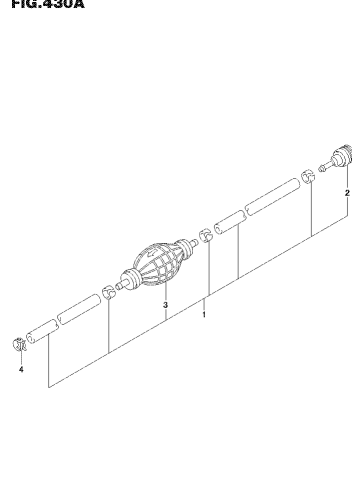


DF1400E\_S11\_S01\_A30A  
FUEL HOSE

**FIG.432A**

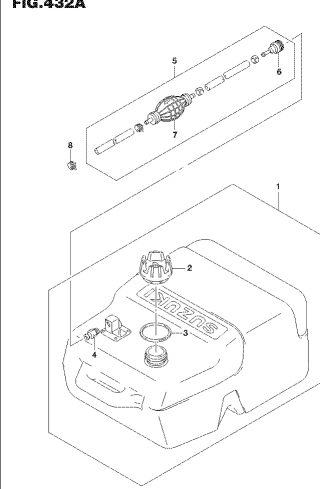


DF1400E\_S11\_S01\_A32A  
FUEL TANK

**FIG.442A**

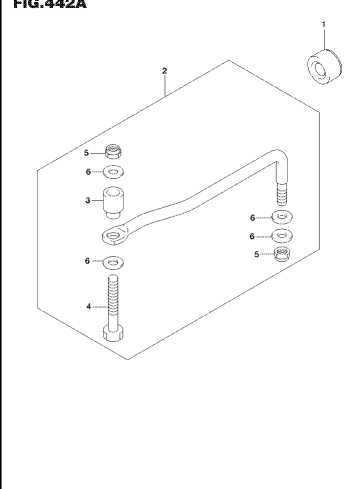


DF1400E\_S11\_S01\_A42A  
DRAG LINK

**FIG.475A**

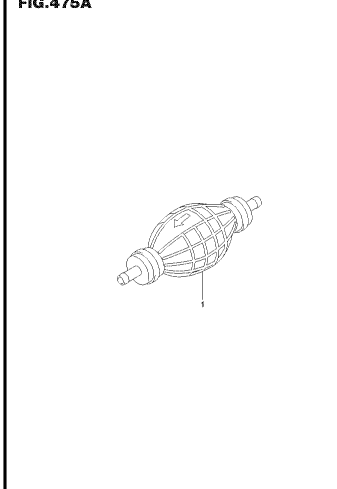


DF1400E\_S11\_S01\_A75A  
STROKE PUMP

**FIG.507A**




DPF400E\_E11\_L001\_507A  
DPFWATER PRESSURE GAUGE SUB KIT

**FIG.520A**

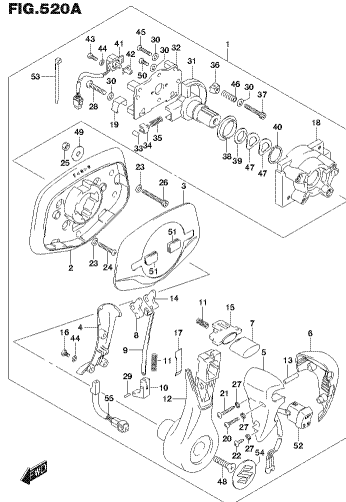


DPF400E\_E11\_L001\_520A  
DPSLUGER MOUNT ROMBOON

**FIG.522A**

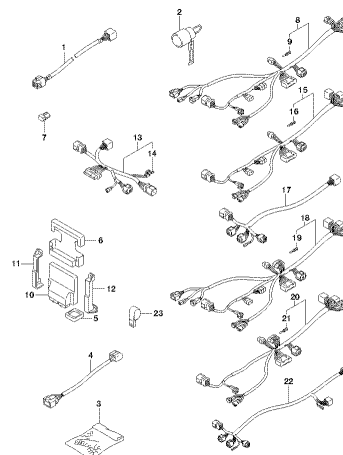


DPF400E\_E11\_L001\_522A  
DPSHARED3 (R)

**FIG.523A**

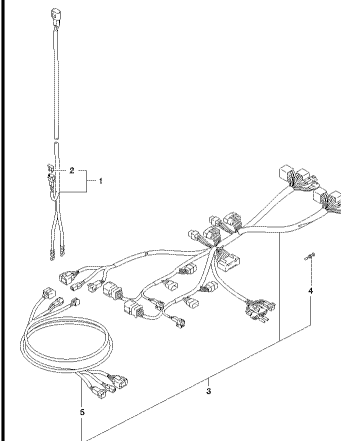


DPF400E\_E11\_L001\_523A  
DPSHARED3 (R)

**FIG.530A**

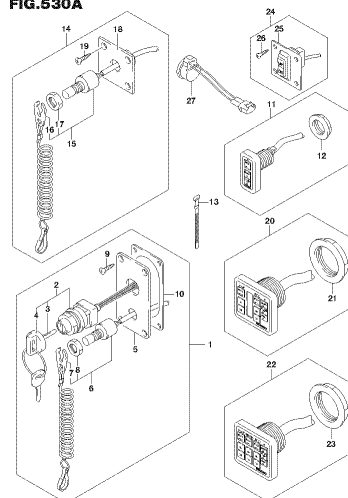


DPF400E\_E11\_L001\_530A  
DPSBENTDI

**FIG.535A**

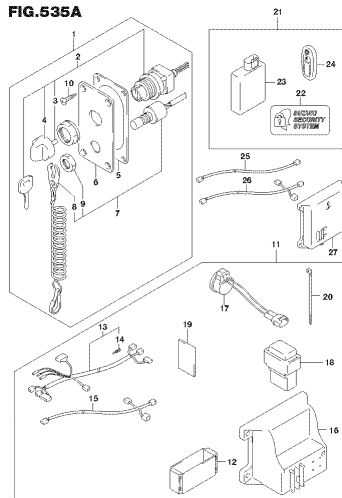


DPF400E\_E11\_L001\_535A  
DPSKEY LESS START

**FIG.540A**

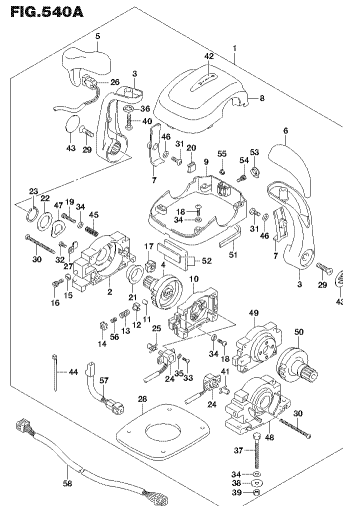


DPF400E\_E11\_L001\_540A  
DPSREMOTE CONTROL ASSY LUAL

**FIG.543A**

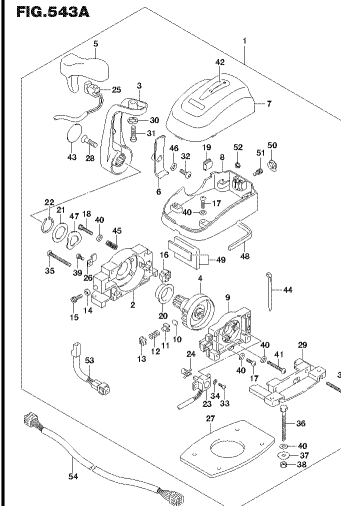

DPF400E\_E11\_L001\_543A  
DPSREMOTE CONTROL ASSY SINGLE

**FIG.585A**

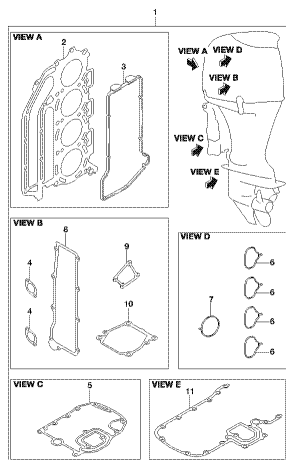

DF140EG\_E11\_021\_583A  
OFT-GASKET SET

FIG.601A




DPT45EG\_E11\_021\_801A  
DPT-MULTI FUNCTION GAUGE (1)

FIG.602A



DF141EG\_E11\_021\_550A  
OPT:MULTI FUNCTION SAUGE (2)

FIG.111A

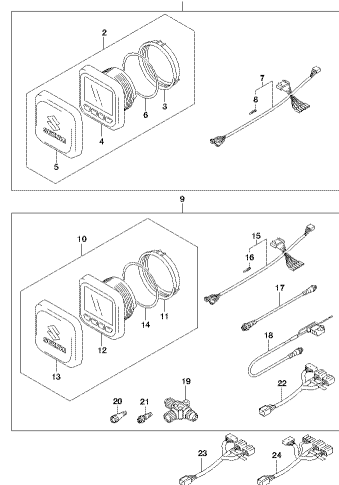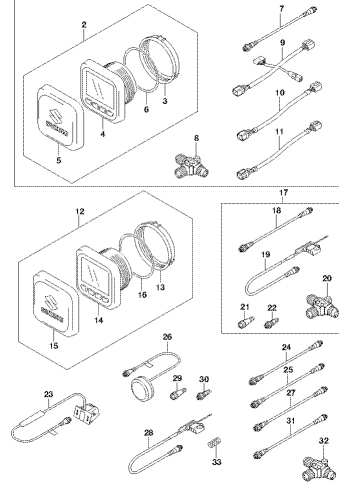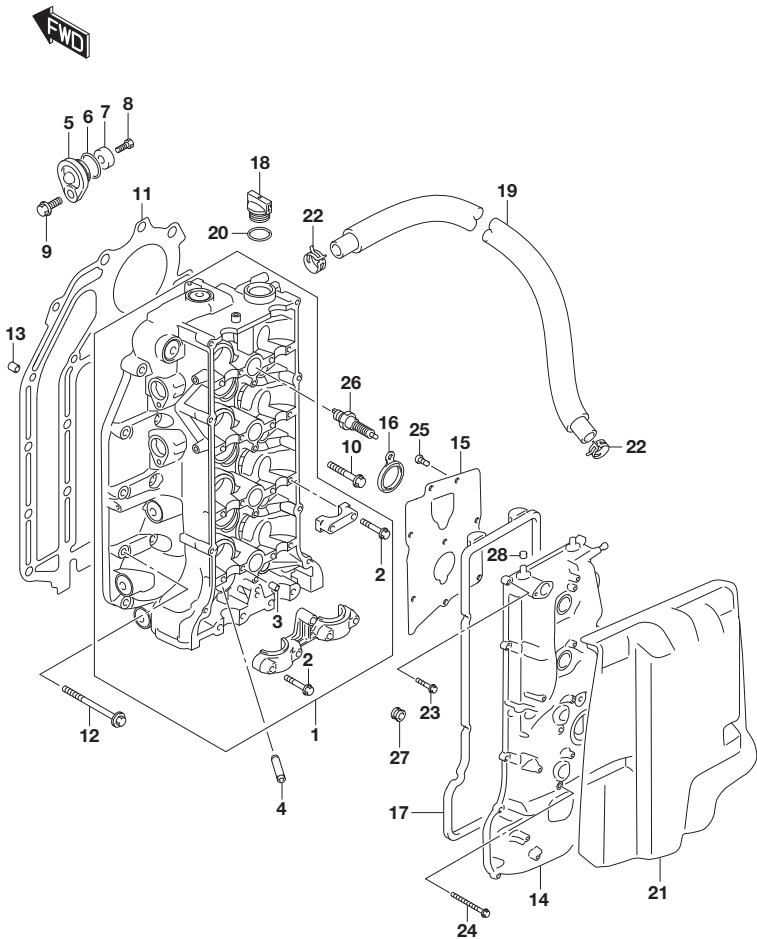

DF140BG\_E11\_021\_111A  
CYLINDER HEAD

FIG.111A (1-B-2) CYLINDER HEAD

| REF NO. | PART NO.        | DESCRIPTION                  | Q'TY | REMARKS |
|---------|-----------------|------------------------------|------|---------|
| 1       | 11100-99L00     | HEAD, CYLINDER               | 1    |         |
| 2       | 09103-06266     | .BOLT (6X40)                 | 21   |         |
| 3       | 09206-08001     | .PIN (8X11)                  | 18   |         |
| 4       | 11115-85FA1-001 | GUIDE, VALVE (OS:0.3)        | 16   | OPT     |
| 5       | 11261-93J00     | COVER, PROTECTION ANODE      | 2    |         |
| 6       | 09280-22019     | O RING (D:1.9,ID:21.8)       | 2    |         |
| 7       | 55321-87J01     | ANODE, PROTECTION            | 2    |         |
| 8       | 09103-06281     | BOLT (6X14)                  | 2    |         |
| 9       | 01550-0820C     | BOLT                         | 2    |         |
| 10      | 11117-89J00     | BOLT, CYLINDER HEAD          | 10   |         |
| 11      | 11141-99L00     | GASKET, CYLINDER HEAD        | 1    |         |
| 12      | 09116-08177     | BOLT (8X52)                  | 8    |         |
| 13      | 04211-13189     | PIN                          | 2    |         |
| 14      | 11170-99L00     | COVER, CYLINDER HEAD         | 1    |         |
| 15      | 11173-99L00     | PLATE, BREATHER              | 1    |         |
| 16      | 11179-90J00     | GASKET, SPARK PLUG HOLE      | 4    |         |
| 17      | 11189-90J00     | GASKET, CYLINDER HEAD COVER  | 1    |         |
| 18      | 11382-93J00     | CAP, OIL FILLER              | 1    |         |
| 19      | 11174-99L00     | HOSE COMP,BREATHER           | 1    |         |
| 20      | 09280-26006     | O RING (D:3.1,ID:26.4)       | 1    |         |
| 21      | 11194-99L00     | GUARD,FUEL HOSE              | 1    |         |
| 22      | 09401-20409     | CLIP                         | 2    |         |
| 23      | 01547-0625C     | BOLT                         | 11   |         |
| 24      | 01547-0655C     | BOLT                         | 4    |         |
| 25      | 02112-0612A     | SCREW                        | 8    |         |
| 26      | 09482-00649     | SPARK PLUG (LKR6E)           | 4    | NGK     |
| 27      | 09320-08517     | CUSHION,FUEL HOSE GUARD NO.1 | 4    |         |
| 28      | 09329-12006     | CUSHION,FUEL HOSE GUARD NO.2 | 2    |         |

DF140BG\_E11\_021

FIG.113A

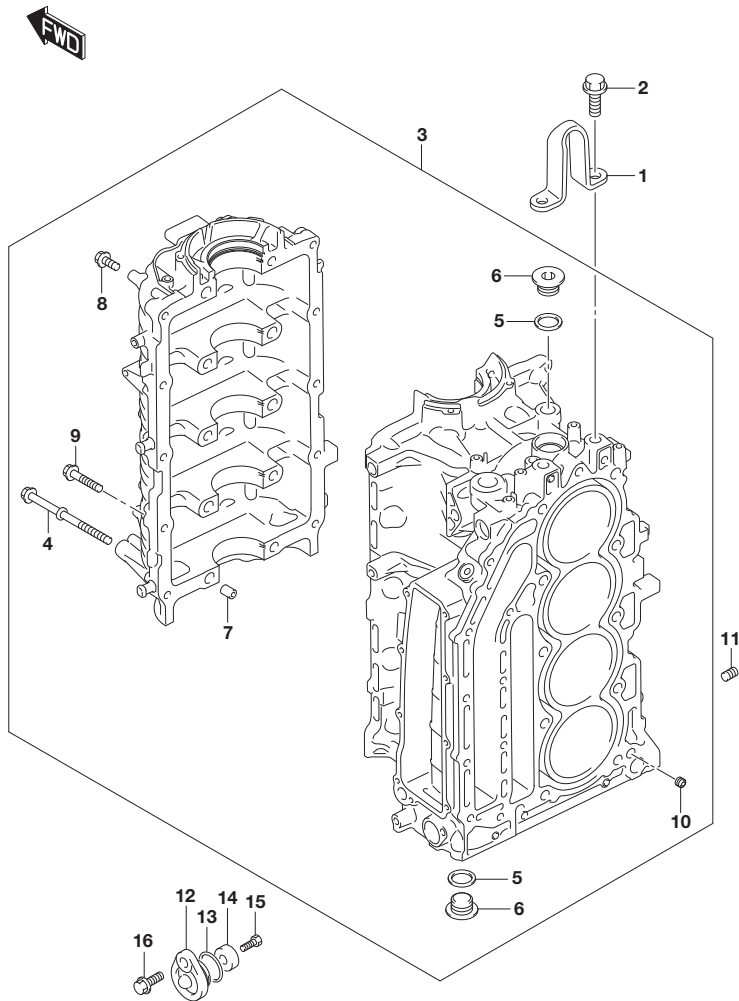


FIG.113A (1-B-3) CYLINDER BLOCK

| REF NO. | PART NO.    | DESCRIPTION               | Q'TY | REMARKS |
|---------|-------------|---------------------------|------|---------|
| 1       | 11291-99L00 | HOOK, ENGINE              | 1    |         |
| 2       | 01550-1230C | BOLT                      | 2    |         |
| 3       | 11301-99L00 | BLOCK, CYLINDER           | 1    |         |
| 4       | 11117-90J10 | .BOLT, CRANKCASE          | 10   |         |
| 5       | 11216-90J10 | .GASKET, OIL GALLERY PLUG | 3    |         |
| 6       | 09248-18014 | .PLUG (18X8)              | 3    |         |
| 7       | 09206-13019 | .PIN (10.4X13X16)         | 5    |         |
| 8       | 01550-0820C | .BOLT                     | 8    |         |
| 9       | 01550-0840C | .BOLT                     | 10   |         |
| 10      | 11112-90J00 | .PLUG, OIL VENTURI        | 1    |         |
| 11      | 09246-04009 | PLUG, OIL GALLERY         | 1    |         |
| 12      | 11261-93J00 | COVER, PROTECTION ANODE   | 1    |         |
| 13      | 09280-22019 | O RING (D:1.9,ID:21.8)    | 1    |         |
| 14      | 55321-87J01 | ANODE, PROTECTION         | 1    |         |
| 15      | 09103-06281 | BOLT (6X14)               | 1    |         |
| 16      | 01550-08207 | BOLT                      | 1    |         |

FIG.116A

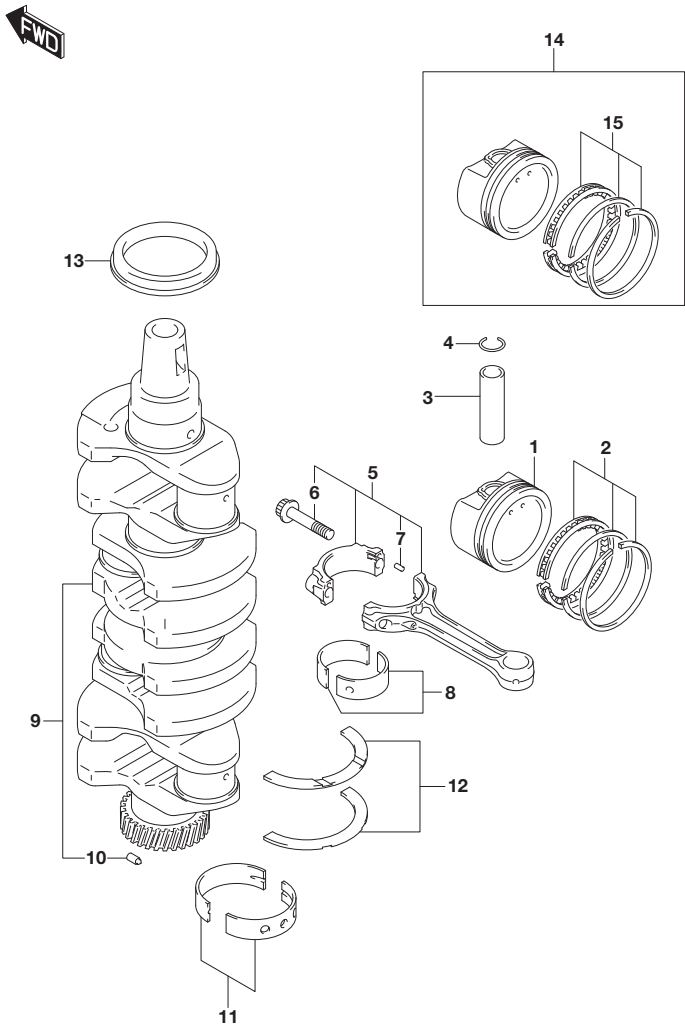


FIG.116A (1-B-4) CRANKSHAFT

| REF NO. | PART NO.        | DESCRIPTION                         | Q'TY | REMARKS           |
|---------|-----------------|-------------------------------------|------|-------------------|
| 1       | 12111-99L00     | PISTON                              | 4    |                   |
| 2       | 12140-92J10     | RING SET, PISTON                    | 4    |                   |
| 3       | 12151-99L00     | PIN, PISTON                         | 4    |                   |
| 4       | 09381-21002     | SNAP RING                           | 8    |                   |
| 5       | 12160-92J10     | CONNROD ASSY                        | 4    |                   |
| 6       | 12163-35F00     | .BOLT, CONNROD                      | 8    |                   |
| 7       | 04221-04089     | .PIN                                | 8    |                   |
| 8-1     | 12100-92841-0A0 | BEARING SET, CONNROD (GREEN)        | 4    |                   |
| 8-2     | 12100-92840-025 | BEARING SET, CONNROD (US:0.25)      | 4    | E40,OPT           |
| 8-3     | 12100-98840-025 | BEARING SET,CONNROD (US:0.25)       | 4    | E11,OPT           |
| 9       | 12220-99L00     | CRANKSHAFT (NT:29)                  | 1    |                   |
| 10      | 09202-05027     | .PIN (5X8.8)                        | 1    |                   |
| 11-1    | 12340-85FB3-0A0 | BEARING SET, CRANKSHAFT             | 5    | GREEN             |
| 11-2    | 12340-85FB3-0B0 | BEARING SET, CRANKSHAFT             | 5    | BLACK             |
| 11-3    | 12340-85FB3-0C0 | BEARING SET, CRANKSHAFT             | 5    | NON               |
| 11-4    | 12340-85FB3-0D0 | BEARING SET, CRANKSHAFT             | 5    | YELLOW            |
| 11-5    | 12340-85FB3-0E0 | BEARING SET, CRANKSHAFT             | 5    | BLUE              |
| 11-6    | 12300-85854-0AA | BEARING SET, CRANKSHAFT (US:0.25)   | 5    | OPT<br>RED/GREEN  |
| 11-7    | 12300-85854-0BA | BEARING SET, CRANKSHAFT (US:0.25)   | 5    | OPT<br>RED/BLACK  |
| 11-8    | 12300-85854-0CA | BEARING SET, CRANKSHAFT (US:0.25)   | 5    | OPT<br>RED        |
| 11-9    | 12300-85854-0DA | BEARING SET, CRANKSHAFT (US:0.25)   | 5    | OPT<br>RED/YELLOW |
| 11-10   | 12300-85854-0EA | BEARING SET, CRANKSHAFT (US:0.25)   | 5    | OPT<br>RED/BLUE   |
| 12-1    | 12300-85830     | BEARING SET, CRANK THRUST           | 1    |                   |
| 12-2    | 12300-85830-012 | BEARING SET, CRANK THRUST (OS:0.12) | 1    | OPT               |
| 13      | 09283-52006     | OIL SEAL (52X70X10)                 | 1    |                   |
| 14      | 12100-99L00-050 | PISTON SET (OS:0.50)                | 4    | OPT               |
| 15      | 12140-92J10-050 | .RING SET, PISTON (OS:0.50)         | 4    | OPT               |



FIG.119A

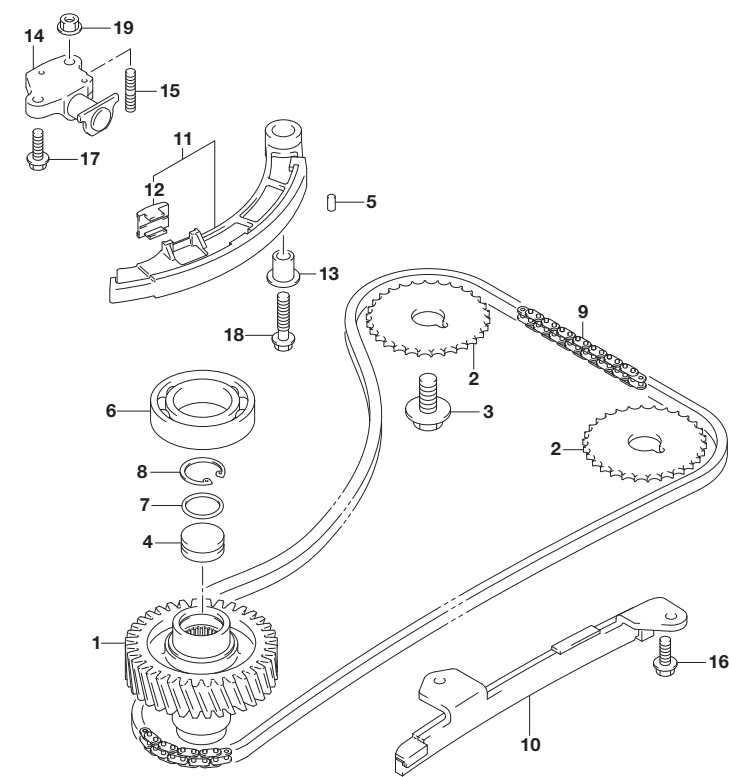


FIG.119A (1-B-5) TIMING CHAIN

| REF NO. | PART NO.    | DESCRIPTION                        | Q'TY | REMARKS |
|---------|-------------|------------------------------------|------|---------|
| 1       | 12732-90J01 | GEAR, DRIVEN (NT:18)               | 1    |         |
| 2       | 12741-90J01 | SPROCKET, CAM SHAFT TIMING (NT:29) | 2    |         |
| 3       | 09103-12049 | BOLT (12X25)                       | 2    |         |
| 4       | 12733-90J00 | PLUG, DRIVEN GEAR                  | 1    |         |
| 5       | 04221-05109 | PIN                                | 2    |         |
| 6       | 09262-35068 | BEARING (35X62X14)                 | 1    | UPPER   |
| 7       | 09280-22022 | O RING (D:1.9,ID:21.8)             | 1    |         |
| 8       | 08331-41269 | CIRCLIP                            | 1    |         |
| 9       | 12761-90J10 | CHAIN, TIMING                      | 1    |         |
| 10      | 12771-90J00 | GUIDE, TIMING CHAIN                | 1    |         |
| 11      | 12810-90J00 | TENSIONER, TIMING CHAIN            | 1    |         |
| 12      | 12813-73G00 | .PAD, TIMING CHAIN TENSIONER       | 1    |         |
| 13      | 12812-90J00 | SPACER, TIMING CHAIN TENSIONER     | 1    |         |
| 14      | 12831-90J02 | ADJUSTER, TENSIONER                | 1    |         |
| 15      | 01421-0616A | STUD BOLT                          | 1    |         |
| 16      | 01550-0616A | BOLT                               | 2    |         |
| 17      | 01550-0620A | BOLT                               | 1    |         |
| 18      | 01550-0835A | BOLT                               | 1    |         |
| 19      | 08316-1006A | NUT                                | 1    |         |



FIG.121A


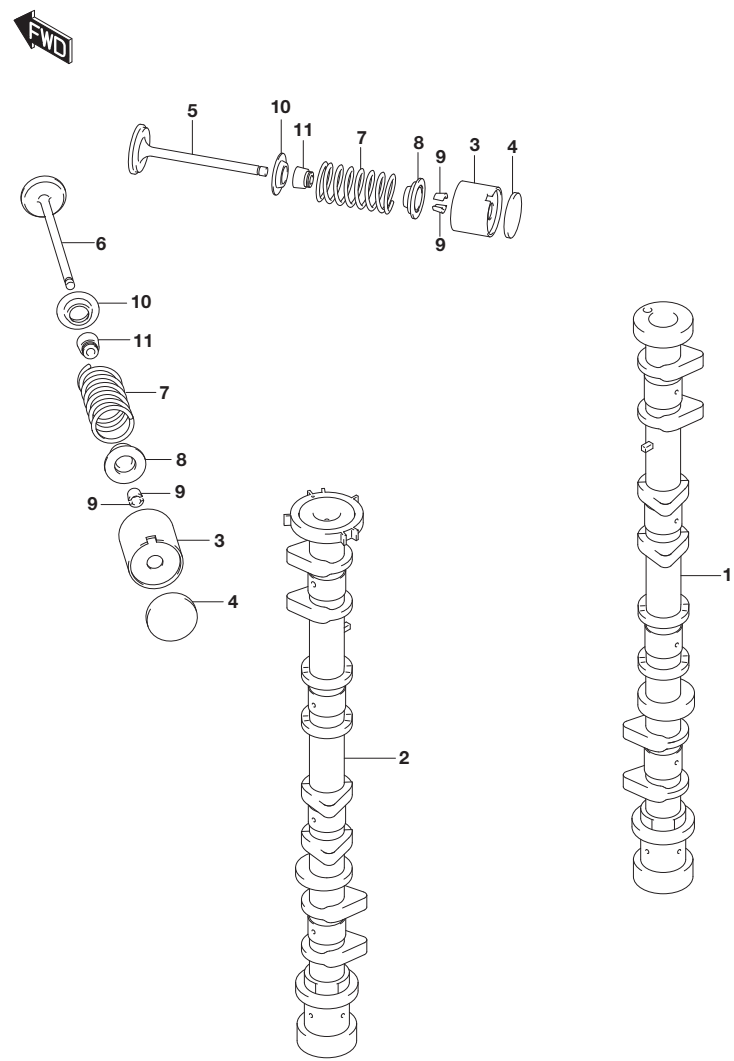


FIG.121A (1-B-6) CAMSHAFT

| REF NO. | PART NO.        | DESCRIPTION            | Q'TY | REMARKS |
|---------|-----------------|------------------------|------|---------|
| 1       | 12711-99L00     | CAMSHAFT, INTAKE       | 1    |         |
| 2       | 12720-99L00     | CAMSHAFT, EXHAUST      | 1    |         |
| 3       | 12891-69G00     | TAPPET                 | 16   |         |
| 4-1     | 12892-69G10-218 | SHIM, TAPPET (T:2.175) | AR   |         |
| 4-2     | 12892-69G10-220 | SHIM, TAPPET (T:2.200) | AR   |         |
| 4-3     | 12892-69G10-223 | SHIM, TAPPET (T:2.225) | AR   |         |
| 4-4     | 12892-69G10-225 | SHIM, TAPPET (T:2.250) | AR   |         |
| 4-5     | 12892-69G10-228 | SHIM, TAPPET (T:2.275) | AR   |         |
| 4-6     | 12892-69G10-230 | SHIM, TAPPET (T:2.300) | AR   |         |
| 4-7     | 12892-69G10-233 | SHIM, TAPPET (T:2.325) | AR   |         |
| 4-8     | 12892-69G10-235 | SHIM, TAPPET (T:2.350) | AR   |         |
| 4-9     | 12892-69G10-238 | SHIM, TAPPET (T:2.375) | AR   |         |
| 4-10    | 12892-69G10-240 | SHIM, TAPPET (T:2.400) | AR   |         |
| 4-11    | 12892-69G10-243 | SHIM, TAPPET (T:2.425) | AR   |         |
| 4-12    | 12892-69G10-245 | SHIM, TAPPET (T:2.450) | AR   |         |
| 4-13    | 12892-69G10-248 | SHIM, TAPPET (T:2.475) | AR   |         |
| 4-14    | 12892-69G10-250 | SHIM, TAPPET (T:2.500) | AR   |         |
| 4-15    | 12892-69G10-253 | SHIM, TAPPET (T:2.525) | AR   |         |
| 4-16    | 12892-69G10-255 | SHIM, TAPPET (T:2.550) | AR   |         |
| 4-17    | 12892-69G10-258 | SHIM, TAPPET (T:2.575) | AR   |         |
| 4-18    | 12892-69G10-260 | SHIM, TAPPET (T:2.600) | AR   |         |
| 4-19    | 12892-69G10-263 | SHIM, TAPPET (T:2.625) | AR   |         |
| 4-20    | 12892-69G10-265 | SHIM, TAPPET (T:2.650) | AR   |         |
| 4-21    | 12892-69G10-268 | SHIM, TAPPET (T:2.675) | AR   |         |
| 4-22    | 12892-69G10-270 | SHIM, TAPPET (T:2.700) | AR   |         |
| 4-23    | 12892-69G10-273 | SHIM, TAPPET (T:2.725) | AR   |         |
| 4-24    | 12892-69G10-275 | SHIM, TAPPET (T:2.750) | AR   |         |
| 4-25    | 12892-69G10-278 | SHIM, TAPPET (T:2.775) | AR   |         |
| 4-26    | 12892-69G10-280 | SHIM, TAPPET (T:2.800) | AR   |         |
| 4-27    | 12892-69G10-283 | SHIM, TAPPET (T:2.825) | AR   |         |
| 4-28    | 12892-69G10-285 | SHIM, TAPPET (T:2.850) | AR   |         |
| 4-29    | 12892-69G10-288 | SHIM, TAPPET (T:2.875) | AR   |         |
| 4-30    | 12892-69G10-290 | SHIM, TAPPET (T:2.900) | AR   |         |
| 4-31    | 12892-69G10-293 | SHIM, TAPPET (T:2.925) | AR   |         |

FIG.121A

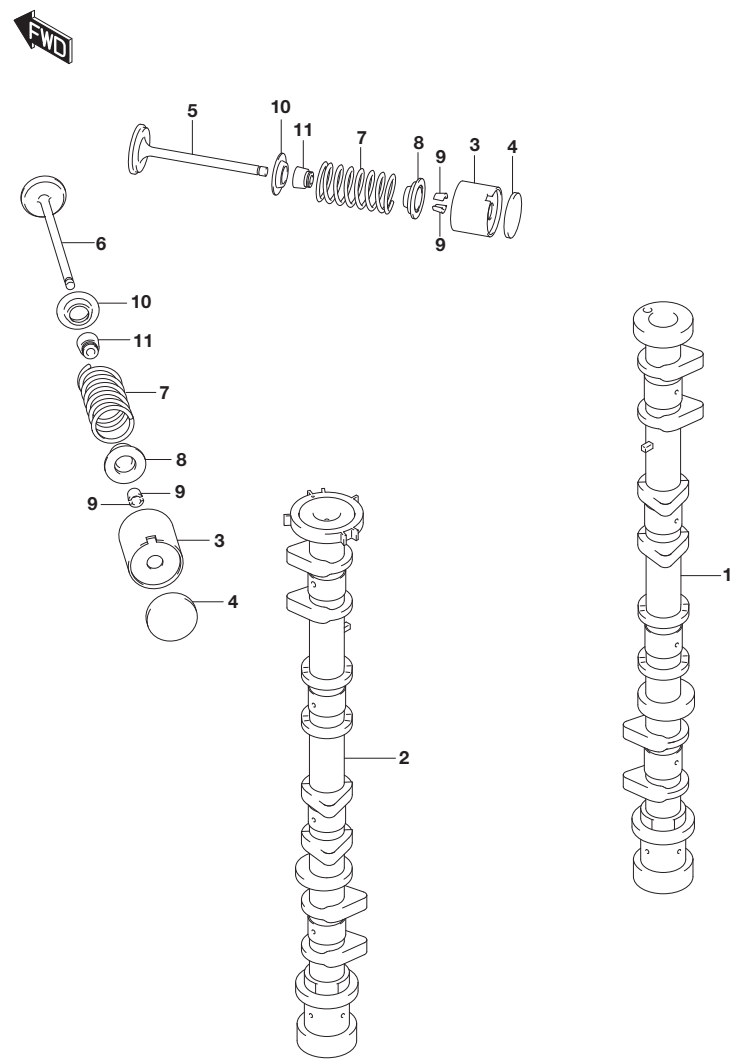

DF140BG\_E11\_021\_121A  
CAMSHAFT

FIG.121A (1-B-7) CAMSHAFT

| REF NO. | PART NO.        | DESCRIPTION            | Q'TY | REMARKS |
|---------|-----------------|------------------------|------|---------|
| 4-32    | 12892-69G10-295 | SHIM, TAPPET (T:2.950) | AR   |         |
| 4-33    | 12892-69G10-298 | SHIM, TAPPET (T:2.975) | AR   |         |
| 4-34    | 12892-69G10-300 | SHIM, TAPPET (T:3.000) | AR   |         |
| 5       | 12911-86FA2     | VALVE, INTAKE          | 8    |         |
| 6       | 12915-86F51     | VALVE, EXHAUST         | 8    |         |
| 7       | 12921-90J01     | SPRING, VALVE          | 16   |         |
| 8       | 12931-90J00     | RETAINER, VALVE SPRING | 16   |         |
| 9       | 12932-85FA0     | COTTER, VALVE          | 32   |         |
| 10      | 12933-86510     | SEAT, VALVE SPRING     | 16   |         |
| 11      | 09289-06003     | OIL SEAL (6X12.8X10.2) | 16   |         |

DF140BG\_E11\_021

FIG.122A

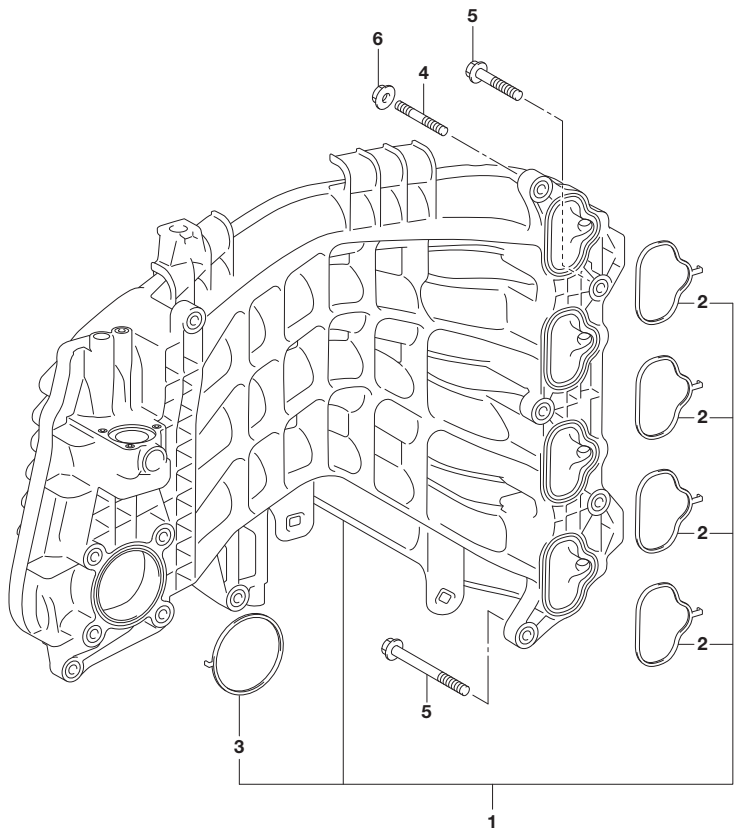


FIG.122A (1-B-8) INTAKE MANIFOLD

| REF NO. | PART NO.    | DESCRIPTION              | Q'TY | REMARKS |
|---------|-------------|--------------------------|------|---------|
| 1       | 13110-99L00 | MANIFOLD, INTAKE         | 1    |         |
| 2       | 13119-99L00 | .GASKET, INTAKE MANIFOLD | 4    |         |
| 3       | 13125-99L00 | .GASKET,THROTTLE BODY    | 1    |         |
| 4       | 01421-0830C | STUD BOLT                | 2    |         |
| 5       | 01550-0835C | BOLT                     | 6    |         |
| 6       | 08316-1008C | NUT                      | 2    |         |

FIG.134A

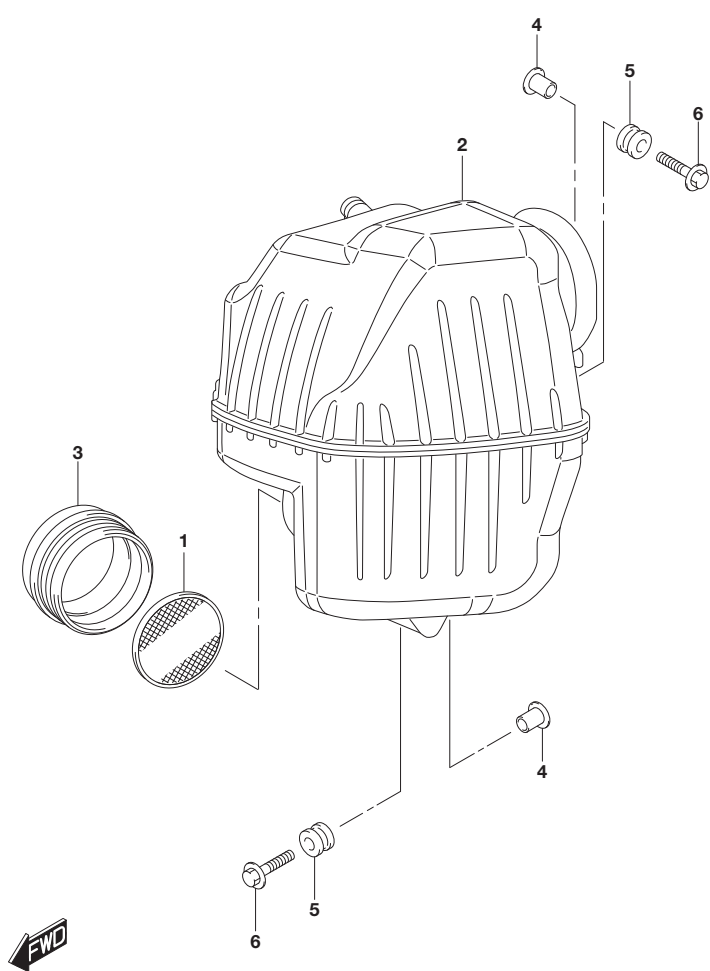


FIG.134A (1-B-9) SILENCER

| REF NO. | PART NO.    | DESCRIPTION            | Q'TY | REMARKS |
|---------|-------------|------------------------|------|---------|
| 1       | 13710-99E00 | ARRESTER, FLAME        | 1    |         |
| 2       | 13810-99L00 | SILENCER               | 1    |         |
| 3       | 13813-99L00 | HOLDER, FLAME ARRESTER | 1    |         |
| 4       | 09169-06090 | WASHER                 | 2    |         |
| 5       | 09320-09059 | CUSHION                | 2    |         |
| 6       | 09116-06517 | BOLT(6X25)             | 2    |         |

FIG.136A


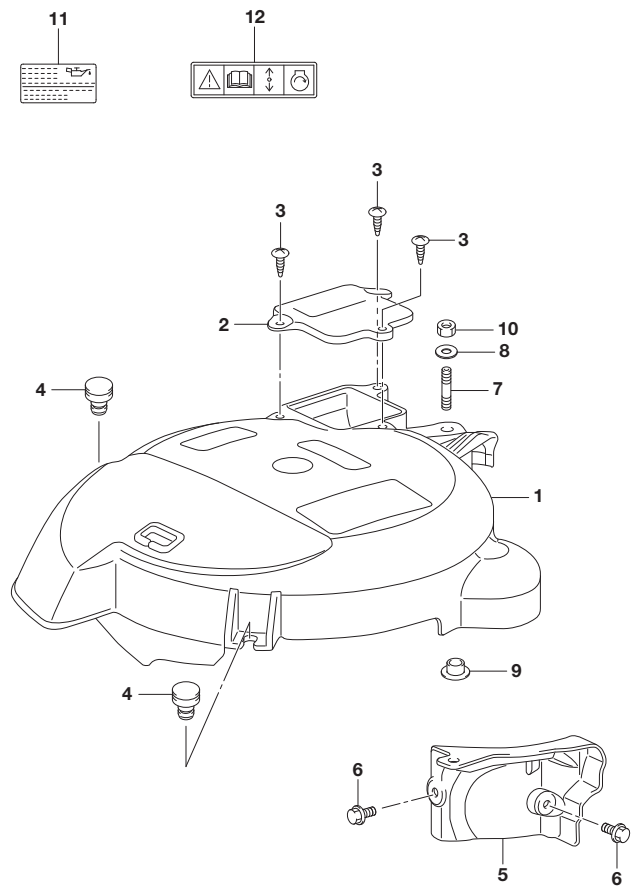


FIG.136A (1-B-10) RING GEAR COVER

| REF NO. | PART NO.    | DESCRIPTION               | Q'TY | REMARKS |
|---------|-------------|---------------------------|------|---------|
| 1       | 11511-99L00 | COVER,RING GEAR           | 1    |         |
| 2       | 11514-99L00 | PLATE,RING GEAR COVER     | 1    |         |
| 3       | 03542-06209 | SCREW                     | 3    |         |
| 4       | 11512-99L00 | CUSHION,RING GEAR COVER   | 2    |         |
| 5       | 11515-99L00 | BRACE,RING GEAR COVER     | 1    |         |
| 6       | 09103-06240 | BOLT                      | 1    |         |
| 7       | 09108-06060 | BOLT,STUD RING GEAR COVER | 1    |         |
| 8       | 09160-06084 | WASHER,RING GEAR COVER    | 1    |         |
| 9       | 09169-06097 | WASHER,RING GEAR COVER    | 1    |         |
| 10      | 08316-10067 | NUT                       | 1    |         |
| 11      | 61494-99L00 | LABEL,OIL & CLEARANCE     | 1    |         |
| 12      | 69711-93E11 | LABEL(S.I.G.P.)           | 1    |         |

FIG.143A

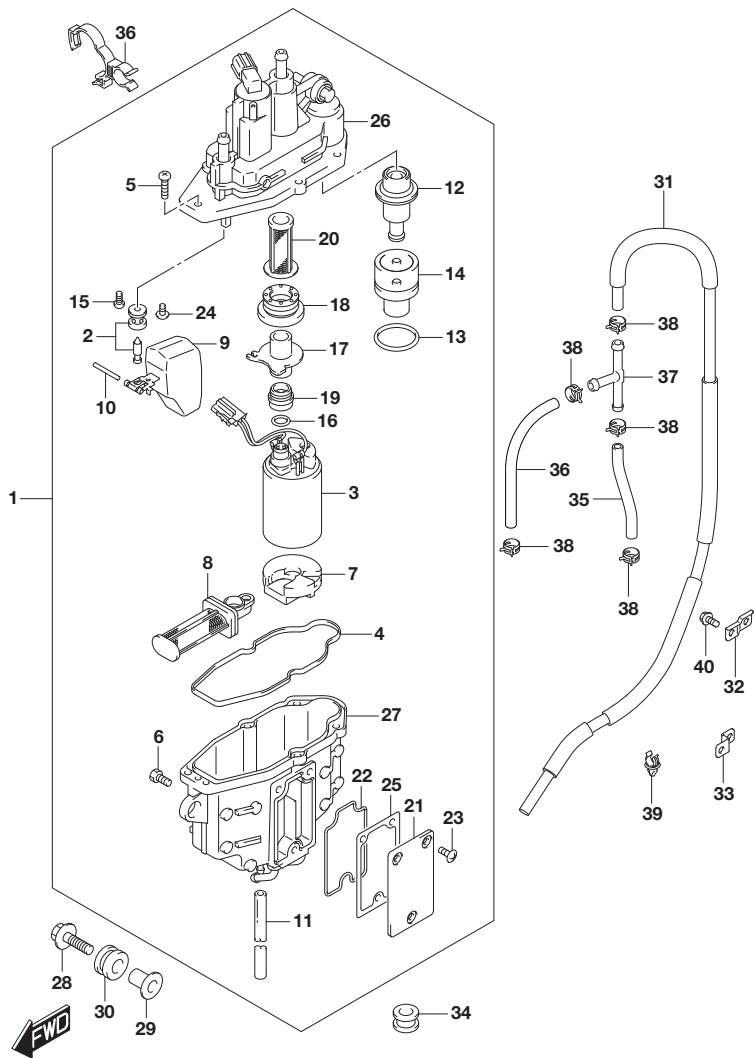


DF140BG\_E11\_021\_143A  
FUEL VAPOR SEPARATOR

FIG.143A (1-B-11) FUEL VAPOR SEPARATOR (E11)

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 15600-99L00 | SEPARATOR ASSY, FUEL VAPOR     | 1    |         |
| 2       | 13370-99L00 | .VALVE ASSY, NEEDLE            | 1    |         |
| 3       | 15200-92J20 | .PUMP ASSY, FUEL(H)            | 1    |         |
| 4       | 15626-92J01 | .SEAL                          | 1    |         |
| 5       | 15628-99E00 | .SCREW (L:15)                  | 5    |         |
| 6       | 15629-99E10 | .SCREW, DRAIN                  | 1    |         |
| 7       | 15641-88L00 | .SPACER                        | 1    |         |
| 8       | 15642-88L00 | .FILTER ASSY                   | 1    |         |
| 9       | 15650-99E00 | .FLOAT                         | 1    |         |
| 10      | 15654-88L00 | .PIN                           | 1    |         |
| 11      | 13684-99L00 | .HOSE, DRAIN (L:280)           | 1    |         |
| 12      | 15760-88L00 | .REGULATOR ASSY                | 1    |         |
| 13      | 15644-88L00 | .O RING                        | 1    |         |
| 14      | 15645-88L00 | .HOLDER, REGULATOR             | 1    |         |
| 15      | 02112-0408A | .SCREW                         | 1    |         |
| 16      | 15648-92J00 | .RING                          | 1    |         |
| 17      | 15643-88L10 | .JOINT                         | 1    |         |
| 18      | 15641-88L31 | .BUSH                          | 1    |         |
| 19      | 15641-88L51 | .BUSH                          | 1    |         |
| 20      | 15642-88L10 | .FILTER                        | 1    |         |
| 21      | 15612-88L00 | .COVER                         | 1    |         |
| 22      | 15613-88L00 | .O RING                        | 1    |         |
| 23      | 15614-88L00 | .SCREW                         | 3    |         |
| 24      | 02142-0408B | .SCREW                         | 1    |         |
| 25      | 15613-92J00 | .GASKET                        | 1    |         |
| 26      | 15620-99L00 | .CASE ASSY,VAPOR SEPARATOR UPR | 1    |         |
| 27      | 15610-92J00 | .CASE ASSY,VAPOR SEPARATOR LWR | 1    |         |

DF140BG\_E11\_021

FIG.143A

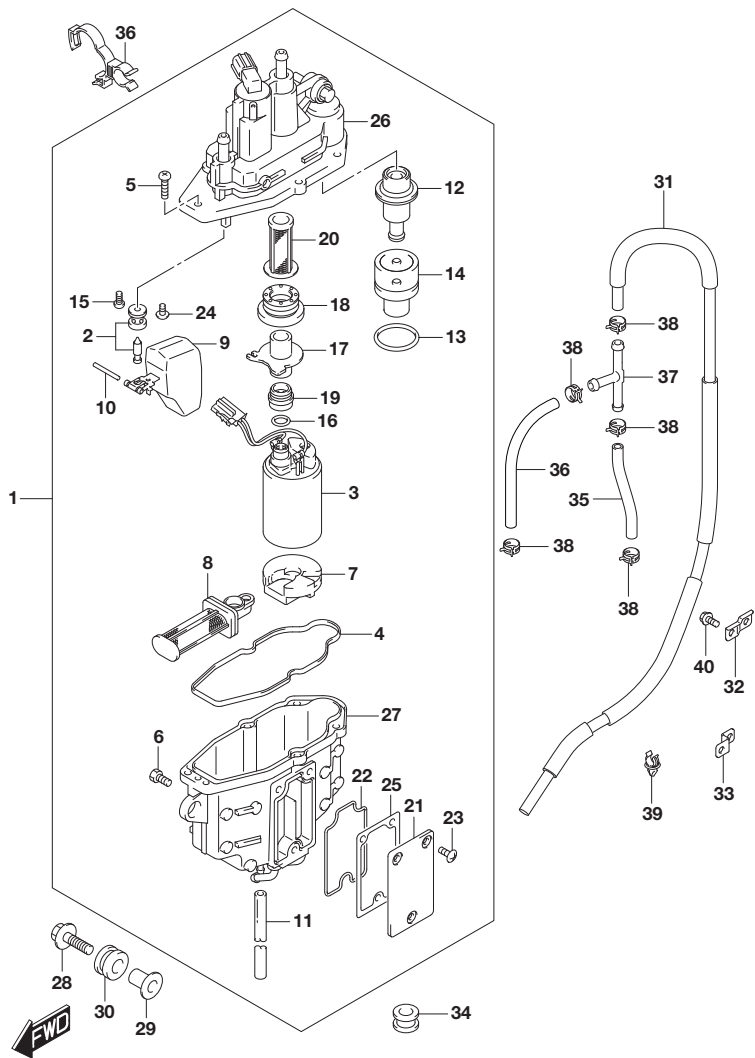

DF140BG\_E11\_021\_143A  
FUEL VAPOR SEPARATOR

FIG.143A (1-B-12) FUEL VAPOR SEPARATOR (E11)

| REF NO. | PART NO.        | DESCRIPTION           | Q'TY | REMARKS |
|---------|-----------------|-----------------------|------|---------|
| 28      | 09116-06517     | BOLT(6X25)            | 3    |         |
| 29      | 09169-06090     | WASHER                | 3    |         |
| 30      | 15691-92J00     | CUSHION               | 3    |         |
| 31      | 15660-99L00     | HOSE COMP,EVAPORATION | 1    |         |
| 32      | 36617-93J00     | BRACKET,HARNESS       | 1    |         |
| 33      | 36617-93J10     | BRACKET,HARNESS       | 2    |         |
| 34      | 09320-08517     | CUSHION,CABLE HOLDER  | 2    |         |
| 35      | 09352-50003-065 | HOSE,EVAPORATION NO.1 | 1    |         |
| 36      | 09352-50003-120 | HOSE,EVAPORATION NO.2 | 1    |         |
| 37      | 09367-05004     | JOINT,HOSE            | 1    |         |
| 38      | 09401-08412     | CLIP                  | 5    |         |
| 39      | 09403-08329     | CLAMP                 | 5    |         |
| 40      | 01550-0612C     | BOLT                  | 3    |         |

DF140BG E11  
DF140BZG E11



FIG.143B


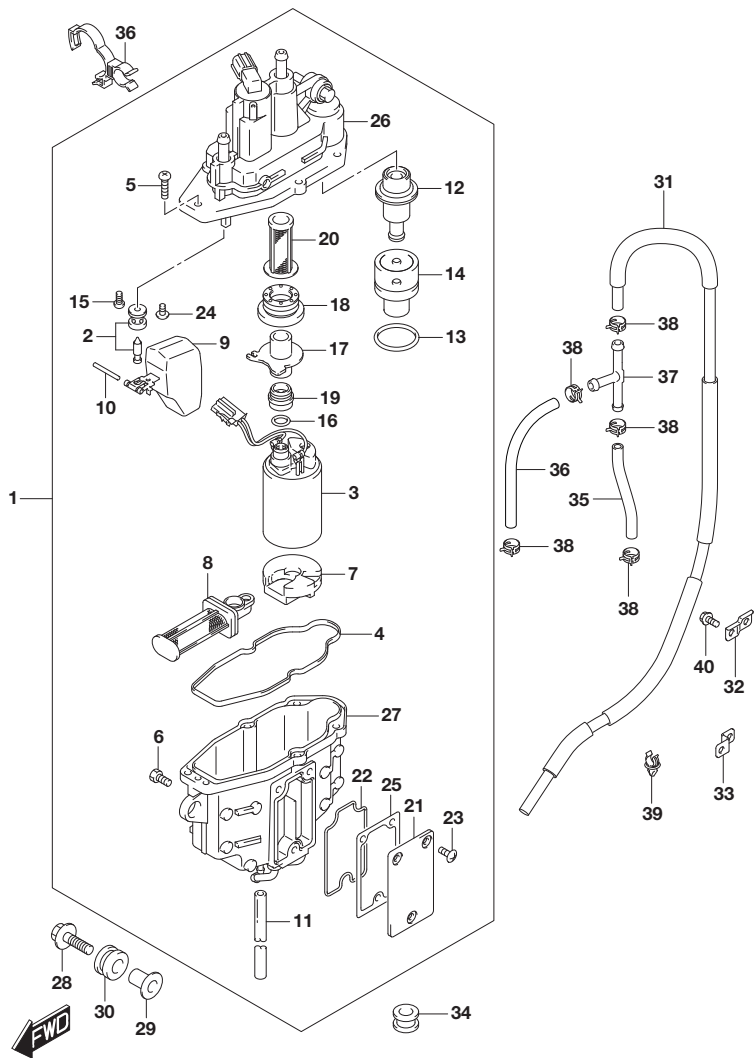


FIG.143B (1-B-13) FUEL VAPOR SEPARATOR (E40)

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 15600-99L10 | SEPARATOR ASSY, FUEL VAPOR     | 1    |         |
| 2       | 13370-99L10 | .VALVE ASSY, NEEDLE            | 1    |         |
| 3       | 15200-92J30 | .PUMP ASSY, FUEL(H)            | 1    |         |
| 4       | 15626-92J10 | .SEAL                          | 1    |         |
| 5       | 15628-99E00 | .SCREW (L:15)                  | 5    |         |
| 6       | 15629-99E10 | .SCREW, DRAIN                  | 1    |         |
| 7       | 15641-88L10 | .SPACER                        | 1    |         |
| 8       | 15642-88L00 | .FILTER ASSY                   | 1    |         |
| 9       | 15650-99E00 | .FLOAT                         | 1    |         |
| 10      | 15654-88L00 | .PIN                           | 1    |         |
| 11      | 13684-99L00 | .HOSE, DRAIN (L:280)           | 1    |         |
| 12      | 15760-88L00 | .REGULATOR ASSY                | 1    |         |
| 13      | 15644-88L10 | .O RING                        | 1    |         |
| 14      | 15645-88L00 | .HOLDER, REGULATOR             | 1    |         |
| 15      | 13614-89J00 | .SCREW                         | 1    |         |
| 16      | 15648-92J00 | .RING                          | 1    |         |
| 17      | 15643-88L10 | .JOINT                         | 1    |         |
| 18      | 15641-88L31 | .BUSH                          | 1    |         |
| 19      | 15641-88L51 | .BUSH                          | 1    |         |
| 20      | 15642-88L10 | .FILTER                        | 1    |         |
| 21      | 15612-88L00 | .COVER                         | 1    |         |
| 22      | 15613-88L00 | .O RING                        | 1    |         |
| 23      | 15614-88L00 | .SCREW                         | 3    |         |
| 24      | 13614-93J00 | .SCREW                         | 1    |         |
| 25      | 15613-92J00 | .GASKET                        | 1    |         |
| 26      | 15620-99L10 | .CASE ASSY,VAPOR SEPARATOR UPR | 1    |         |
| 27      | 15610-92J00 | .CASE ASSY,VAPOR SEPARATOR LWR | 1    |         |

FIG.143B

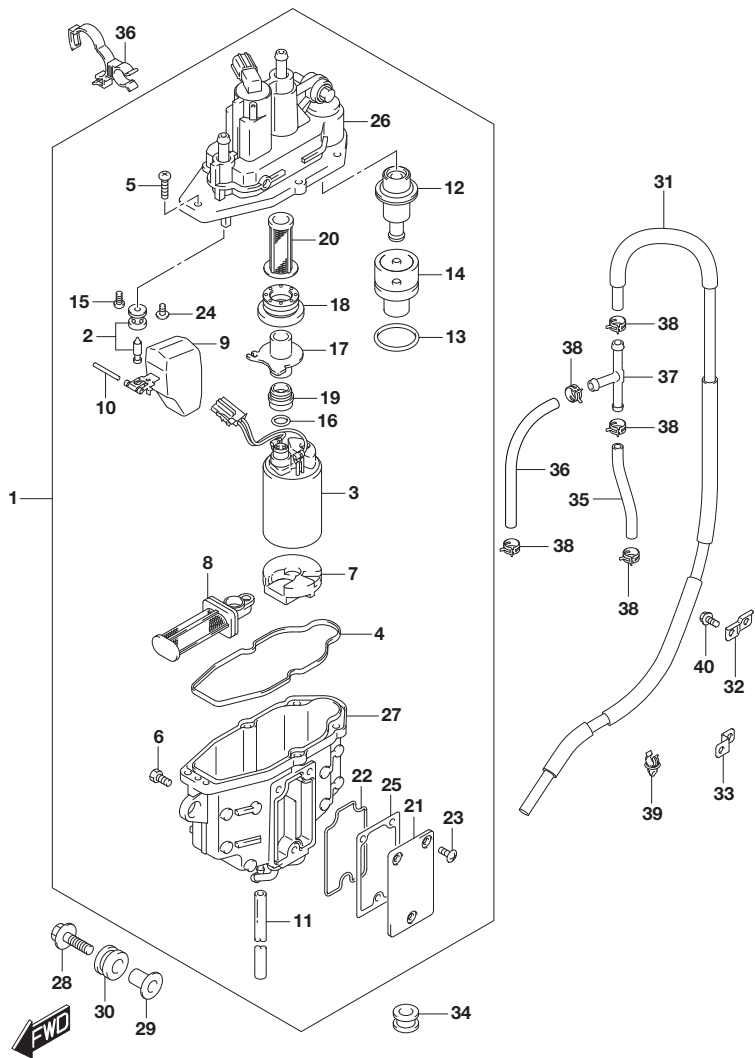

DF140BG\_E11\_021\_143B  
FUEL VAPOR SEPARATOR

FIG.143B (1-B-14) FUEL VAPOR SEPARATOR (E40)

| REF NO. | PART NO.        | DESCRIPTION           | Q'TY | REMARKS |
|---------|-----------------|-----------------------|------|---------|
| 28      | 09116-06517     | BOLT(6X25)            | 3    |         |
| 29      | 09169-06090     | WASHER                | 3    |         |
| 30      | 15691-92J00     | CUSHION               | 3    |         |
| 31      | 15660-99L00     | HOSE COMP,EVAPORATION | 1    |         |
| 32      | 36617-93J00     | BRACKET,HARNESS       | 1    |         |
| 33      | 36617-93J10     | BRACKET,HARNESS       | 2    |         |
| 34      | 09320-08517     | CUSHION,CABLE HOLDER  | 2    |         |
| 35      | 09352-50003-065 | HOSE,EVAPORATION NO.1 | 1    |         |
| 36      | 09352-50003-120 | HOSE,EVAPORATION NO.2 | 1    |         |
| 37      | 09367-05004     | JOINT,HOSE            | 1    |         |
| 38      | 09401-08412     | CLIP                  | 5    |         |
| 39      | 09403-08329     | CLAMP                 | 5    |         |
| 40      | 01550-0612C     | BOLT                  | 3    |         |

DF140BG E40  
DF140BZG E40

FIG.144A

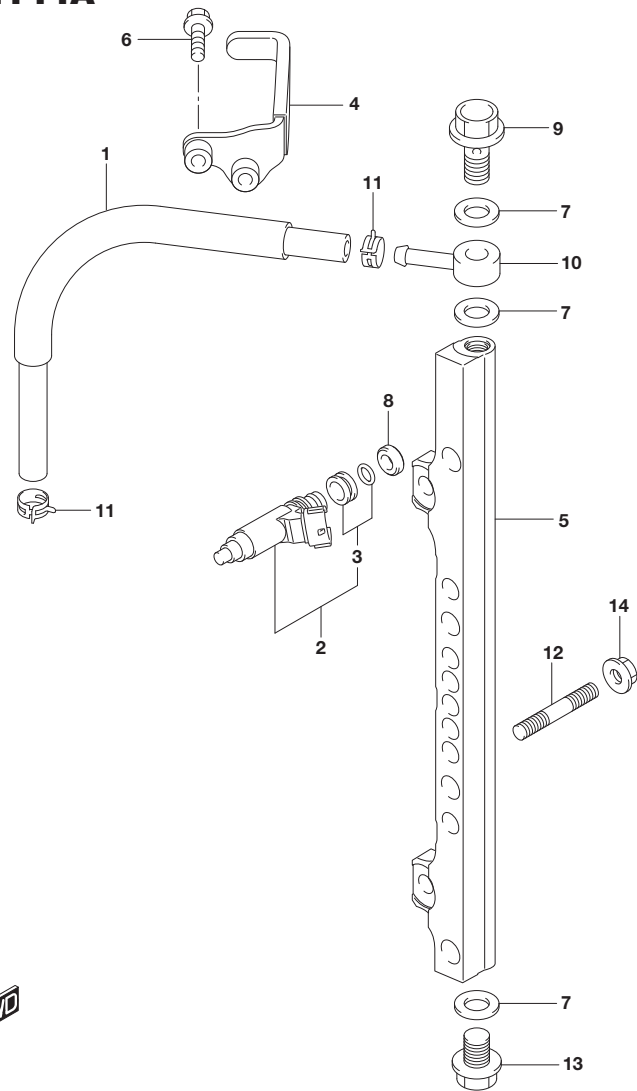


FIG.144A (1-B-15) FUEL INJECTOR (E11)

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 15681-99L00 | HOSE, FUEL (SEPARATOR TO DLVY) | 1    |         |
| 2       | 15710-99L00 | INJECTOR, FUEL                 | 4    |         |
| 3       | 15716-65DT0 | .GROMMET SET                   | 4    |         |
| 4       | 15423-99L00 | GUARD, FUEL HOSE               | 2    |         |
| 5       | 15751-99L00 | PIPE, DELIVERY                 | 1    |         |
| 6       | 01550-0625C | BOLT                           | 1    |         |
| 7       | 09168-12013 | GASKET (11.8X22X1.2)           | 3    |         |
| 8       | 09320-08062 | CUSHION                        | 4    |         |
| 9       | 09360-12008 | UNION                          | 1    |         |
| 10      | 09363-08004 | UNION                          | 1    |         |
| 11      | 09401-11425 | CLIP                           | 2    |         |
| 12      | 01421-0820C | STUD BOLT                      | 2    |         |
| 13      | 01550-12167 | BOLT                           | 1    |         |
| 14      | 08316-1008C | NUT                            | 2    |         |

DF140BG E11  
DF140BZG E11



FIG.144B

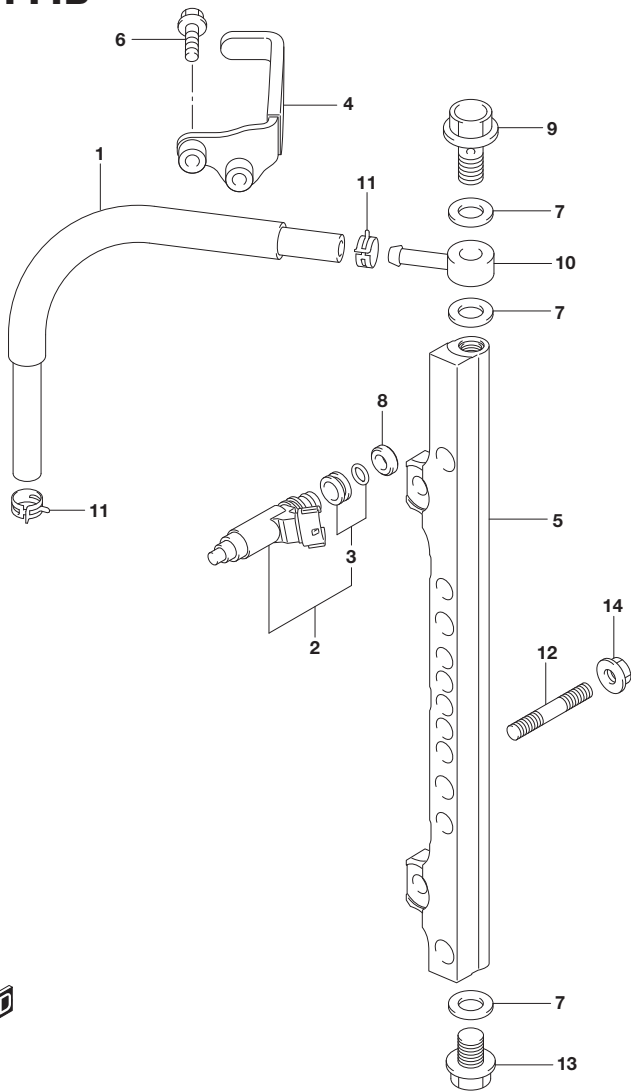


FIG.144B (1-C-2) FUEL INJECTOR (E40)

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 15681-99L00 | HOSE, FUEL (SEPARATOR TO DLVY) | 1    |         |
| 2       | 15710-99L00 | INJECTOR, FUEL                 | 4    |         |
| 3       | 15716-65DT0 | .GROMMET SET                   | 4    |         |
| 4       | 15423-99L00 | GUARD,FUEL HOSE                | 2    |         |
| 5       | 15751-99L00 | PIPE, DELIVERY                 | 1    |         |
| 6       | 01550-0625C | BOLT                           | 1    |         |
| 7       | 15762-90J00 | GASKET                         | 3    |         |
| 8       | 09320-08062 | CUSHION                        | 4    |         |
| 9       | 09360-12013 | UNION                          | 1    |         |
| 10      | 15830-90J00 | UNION                          | 1    |         |
| 11      | 09401-11425 | CLIP                           | 2    |         |
| 12      | 01421-0820C | STUD BOLT                      | 2    |         |
| 13      | 09247-12013 | BOLT                           | 1    |         |
| 14      | 08316-1008C | NUT                            | 2    |         |

DF140BG E40  
DF140BZG E40

FIG.146A

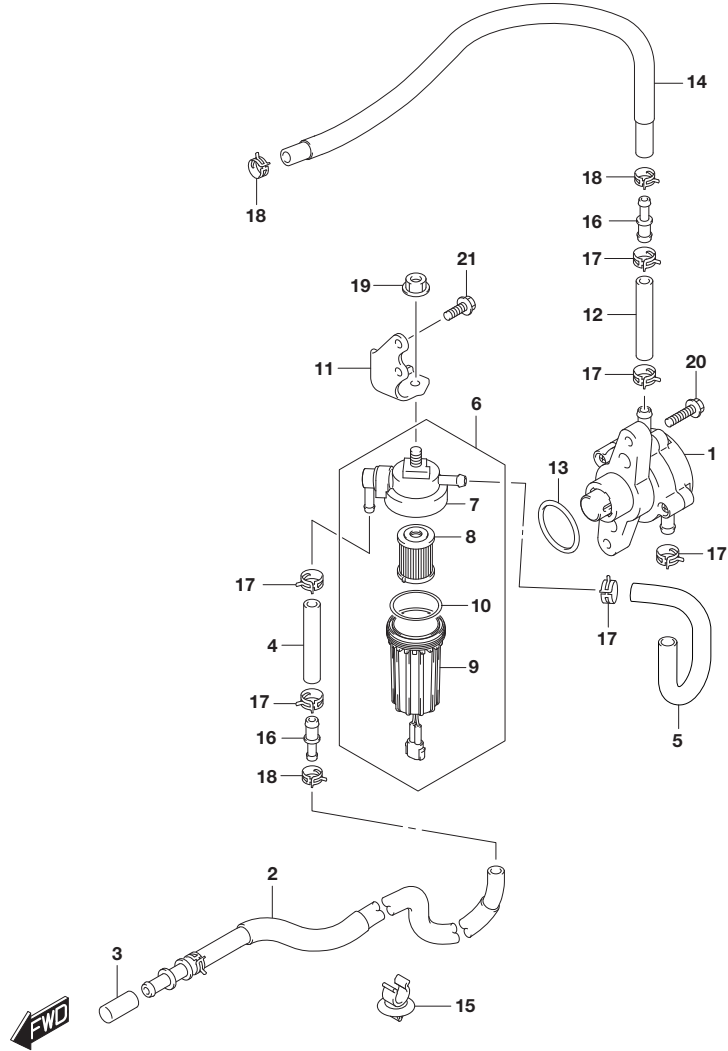


FIG.146A (1-C-3) FUEL PUMP

| REF NO. | PART NO.    | DESCRIPTION                  | Q'TY |     | REMARKS |
|---------|-------------|------------------------------|------|-----|---------|
| 1-1     | 15100-96J01 | PUMP ASSY, FUEL              | 1    | E11 |         |
| 1-2     | 15100-96J11 | PUMP ASSY, FUEL              | 1    | E40 |         |
| 2       | 15190-99L00 | HOSE,FUEL INLET(TO 2WAY)     | 1    |     |         |
| 3       | 09251-07003 | CAP(OD:11.5)                 | 1    |     |         |
| 4       | 15195-96L00 | HOSE,FUEL(2WAY TO FILTER)    | 1    |     |         |
| 5       | 15192-99L00 | HOSE,FUEL(FILTER TO PUMP)    | 1    |     |         |
| 6       | 15410-92J10 | FILTER, FUEL                 | 1    |     |         |
| 7       | 15411-92J10 | .CAP, FUEL FILTER            | 1    |     |         |
| 8       | 15412-92J00 | .FILTER, FUEL                | 1    |     |         |
| 9       | 15413-92J00 | .CASE, FUEL FILTER           | 1    |     |         |
| 10      | 15415-92J00 | .SEAL, FUEL FILTER           | 1    |     |         |
| 11      | 15421-99L00 | BRACKET, FUEL FILTER         | 1    |     |         |
| 12      | 15195-96L10 | HOSE,FUEL(PUMP TO 2WAY)      | 1    |     |         |
| 13      | 09280-33004 | O RING (D:3.1,ID:32.7)       | 1    |     |         |
| 14      | 15193-99L00 | HOSE,FUEL(2WAY TO SEPARATOR) | 1    |     |         |
| 15      | 09403-12314 | CLAMP                        | 3    |     |         |
| 16      | 15831-96L00 | UNION, 2 WAY FUEL HOSE       | 2    |     |         |
| 17      | 09401-14409 | CLIP                         | 6    |     |         |
| 18      | 09401-11006 | CLIP                         | 3    |     |         |
| 19      | 08316-1008C | NUT                          | 1    |     |         |
| 20      | 09103-06211 | BOLT (6X25)                  | 2    |     |         |
| 21      | 01550-0616C | BOLT (6X16)                  | 2    |     |         |

FIG.160A

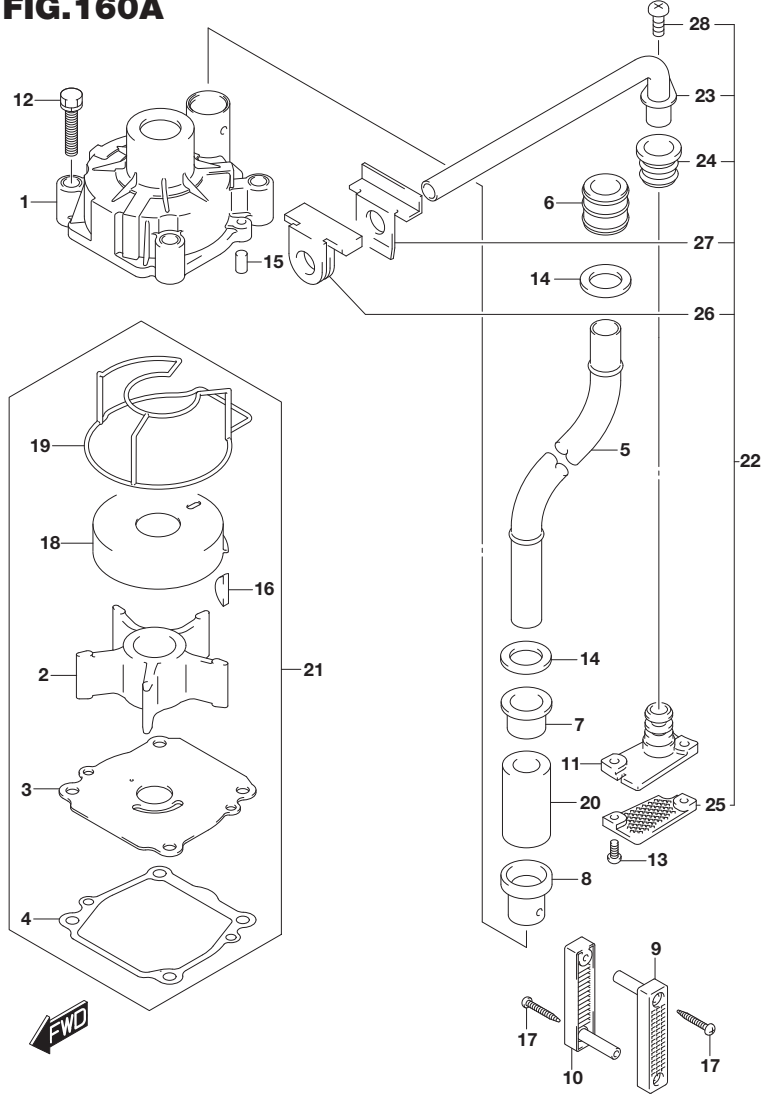


FIG.160A (1-C-4) WATER PUMP (E11)

| REF NO. | PART NO.    | DESCRIPTION              | Q'TY | REMARKS      |
|---------|-------------|--------------------------|------|--------------|
| 1       | 17410-92J00 | CASE, WATER PUMP         | 1    |              |
| 2       | 17461-90J01 | IMPELLER, WATER PUMP     | 1    |              |
| 3       | 17471-92J00 | PANEL, PUMP CASE UNDER   | 1    |              |
| 4       | 17472-87E10 | GASKET, PUMP CASE PANEL  | 1    |              |
| 5-1     | 17561-90J03 | TUBE, WATER (L)          | 1    | W/TRANSOM(L) |
| 5-2     | 17561-90J13 | TUBE, WATER (X)          | 1    | W/TRANSOM(X) |
| 6       | 17562-90J01 | BUSH, WATER TUBE UPPER   | 1    |              |
| 7       | 17563-87D01 | BUSH, WATER TUBE LOWER   | 1    |              |
| 8       | 17564-87D00 | BUSH, WATER PUMP CASE    | 1    |              |
| 9       | 17631-90J00 | FILTER, WATER PORT SIDE  | 1    |              |
| 10      | 17632-90J00 | FILTER, WATER STBD SIDE  | 1    |              |
| 11      | 17635-90J00 | PLUG, SUB WATER TUBE     | 1    |              |
| 12      | 09116-08131 | BOLT (8X45)              | 4    |              |
| 13      | 09125-05046 | SCREW (5X12)             | 2    |              |
| 14      | 09161-16008 | WASHER (15.8X26X1)       | 2    |              |
| 15      | 09202-06031 | PIN (6X12)               | 2    |              |
| 16      | 09420-05009 | KEY                      | 1    |              |
| 17      | 09132-04034 | SCREW (4X18)             | 2    |              |
| 18      | 17413-92J01 | SLEEVE, WATER PUMP CASE  | 1    |              |
| 19      | 17416-92J11 | SEALING, WATER PUMP CASE | 1    |              |
| 20      | 17612-90J01 | SPACER, WATER TUBE       | 1    | W/TRANSOM(X) |

| REF NO. | PART NO.    | DESCRIPTION             | QTY   | REMARKS |
|---------|-------------|-------------------------|-------|---------|
| 21      | 17400-92J23 | KIT, WATER PUMP REPAIR  | 1 OPT |         |
| 22      | 17500-90J11 | KIT, WATER SUB TUBE     | 1 OPT |         |
| 23      | 17520-90J00 | .TUBE, WATER SUB        | 1 OPT |         |
| 24      | 17563-87D01 | .BUSH, WATER TUBE LOWER | 1 OPT |         |
| 25      | 17635-87E00 | .FILTER, WATER SUB      | 1 OPT |         |
| 26      | 55332-87D02 | .RUBBER, EXHAUST SEAL   | 1 OPT |         |
| 27      | 55333-87D02 | .PLATE, EXHAUST SEAL    | 1 OPT |         |
| 28      | 09125-06063 | .SCREW (6X10)           | 1 OPT |         |

DF140BG\_E11\_021

FIG.160B

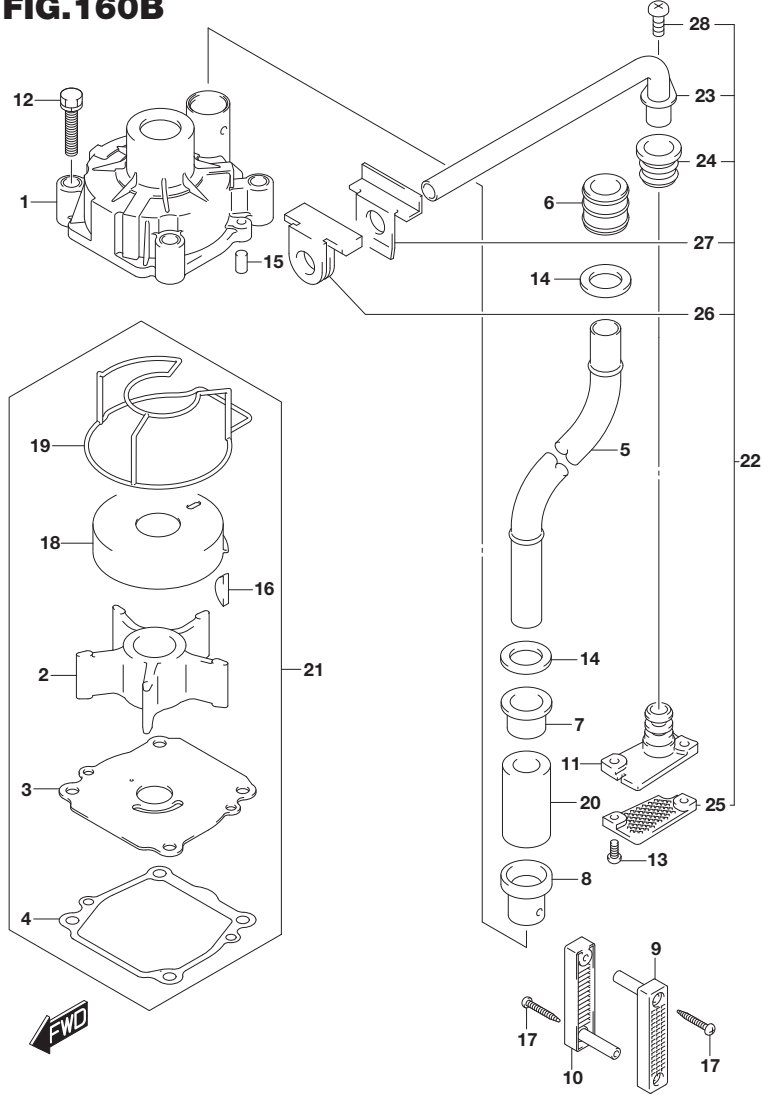


FIG.160B (1-C-6) WATER PUMP (E40)

| REF NO. | PART NO.    | DESCRIPTION              | Q'TY | REMARKS      |
|---------|-------------|--------------------------|------|--------------|
| 1       | 17410-92J00 | CASE, WATER PUMP         | 1    |              |
| 2       | 17461-90J01 | IMPELLER, WATER PUMP     | 1    |              |
| 3       | 17471-92J10 | PANEL, PUMP CASE UNDER   | 1    |              |
| 4       | 17472-87E10 | GASKET, PUMP CASE PANEL  | 1    |              |
| 5-1     | 17561-90J03 | TUBE, WATER (L)          | 1    | W/TRANSOM(L) |
| 5-2     | 17561-90J13 | TUBE, WATER (X)          | 1    | W/TRANSOM(X) |
| 6       | 17562-90J01 | BUSH, WATER TUBE UPPER   | 1    |              |
| 7       | 17563-87D01 | BUSH, WATER TUBE LOWER   | 1    |              |
| 8       | 17564-87D00 | BUSH, WATER PUMP CASE    | 1    |              |
| 9       | 17631-90J00 | FILTER, WATER PORT SIDE  | 1    |              |
| 10      | 17632-90J00 | FILTER, WATER STBD SIDE  | 1    |              |
| 11      | 17635-90J00 | PLUG, SUB WATER TUBE     | 1    |              |
| 12      | 09116-08131 | BOLT (8X45)              | 4    |              |
| 13      | 09125-05046 | SCREW (5X12)             | 2    |              |
| 14      | 09161-16008 | WASHER (15.8X26X1)       | 2    |              |
| 15      | 09202-06031 | PIN (6X12)               | 2    |              |
| 16      | 09420-05009 | KEY                      | 1    |              |
| 17      | 09132-04034 | SCREW (4X18)             | 2    |              |
| 18      | 17413-92J11 | SLEEVE, WATER PUMP CASE  | 1    |              |
| 19      | 17416-92J11 | SEALING, WATER PUMP CASE | 1    |              |
| 20      | 17612-90J01 | SPACER, WATER TUBE       | 1    | W/TRANSOM(X) |




[illegible]

| REF NO. | PART NO.    | DESCRIPTION             | QTY   | REMARKS |
|---------|-------------|-------------------------|-------|---------|
| 21      | 17400-92J11 | KIT, WATER PUMP REPAIR  | 1 OPT |         |
| 22      | 17500-90J11 | KIT, WATER SUB TUBE     | 1 OPT |         |
| 23      | 17520-90J00 | .TUBE, WATER SUB        | 1 OPT |         |
| 24      | 17563-87D01 | .BUSH, WATER TUBE LOWER | 1 OPT |         |
| 25      | 17635-87E00 | .FILTER, WATER SUB      | 1 OPT |         |
| 26      | 55332-87D02 | .RUBBER, EXHAUST SEAL   | 1 OPT |         |
| 27      | 55333-87D02 | .PLATE, EXHAUST SEAL    | 1 OPT |         |
| 28      | 09125-06063 | .SCREW (6X10)           | 1 OPT |         |

DF140BG\_E11\_021

FIG.162A

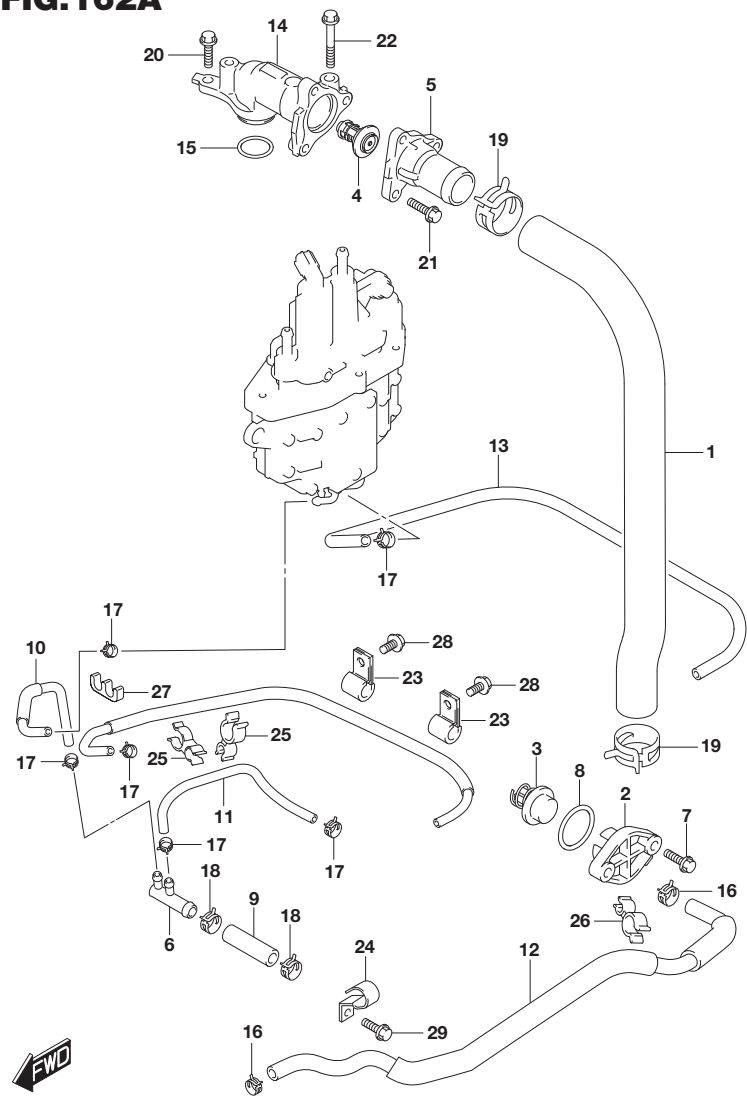

DF140BG\_E11\_021\_162A  
THERMOSTAT

FIG.162A (1-C-8) THERMOSTAT


| REF NO. | PART NO.        | DESCRIPTION                    | Q'TY | REMARKS                          |
|---------|-----------------|--------------------------------|------|----------------------------------|
| 1       | 11196-99L00     | HOSE, WATER RETURN             | 1    |                                  |
| 2       | 17611-90J00     | COVER, WATER PRESS VALVE       | 1    |                                  |
| 3       | 17660-98L01     | VALVE, WATER PRESSURE          | 1    |                                  |
| 4-1     | 17670-90J01     | THERMOSTAT, WATER 60 DEG       | 1    |                                  |
| 4-2     | 17670-90J11     | THERMOSTAT, WATER 71 DEG       | 1    | OPT                              |
| 5       | 17681-99L00     | COVER, THERMOSTAT              | 1    |                                  |
| 6       | 17711-90J00     | 3 WAY, WATER HOSE              | 1    |                                  |
| 7       | 09116-06121     | BOLT (6X25)                    | 2    |                                  |
| 8       | 09280-26006     | O RING (D:3.1,ID:26.4)         | 1    |                                  |
| 9       | 09352-11154-050 | HOSE, WATER(HOLDER TO 3WAY)    | 1    | L:50<br>HOLDER TO 3 WAY          |
| 10      | 17712-99L00     | HOSE, WATER(3WAY TO SEPARATOR) | 1    | L:120<br>3WAY TO SEPARATOR       |
| 11      | 09352-50006-600 | HOSE (5X9X600)                 | 1    | L:600->220<br>3WAY TO CRKC LOWER |
| 12      | 17915-99L00     | HOSE, FLUSH                    | 1    |                                  |
| 13      | 17710-99L00     | HOSE, WATER                    | 1    |                                  |
| 14      | 17581-99L00     | PIPE, WATER OUTLET             | 1    |                                  |
| 15      | 09280-26006     | O RING(D:3.1,ID:26.4)          | 1    |                                  |
| 16      | 09401-15414     | CLIP                           | 2    |                                  |
| 17      | 09401-08413     | CLIP                           | 5    |                                  |
| 18      | 09401-14409     | CLIP                           | 2    |                                  |
| 19      | 09401-31407     | CLIP                           | 2    |                                  |
| 20      | 01550-0620C     | BOLT                           | 1    |                                  |
| 21      | 01550-0620C     | BOLT                           | 3    |                                  |
| 22      | 01550-0655C     | BOLT                           | 1    |                                  |
| 23      | 09403-12420     | CLAMP                          | 2    |                                  |
| 24      | 09403-16416     | CLAMP                          | 1    |                                  |
| 25      | 09408-00056     | CLAMP                          | 2    |                                  |
| 26      | 09408-00174     | CLAMP                          | 1    |                                  |
| 27      | 09408-00175     | CLIP                           | 1    |                                  |
| 28      | 01550-0612C     | BOLT                           | 2    |                                  |
| 29      | 01550-0612C     | BOLT                           | 1    |                                  |

DF140BG\_E11\_021

FIG.163A

FIG.163A (1-C-9) THROTTLE BODY

| REF NO. | PART NO.    | DESCRIPTION                | Q'TY | REMARKS |
|---------|-------------|----------------------------|------|---------|
| 1       | 13300-99L00 | BODY ASSY,THROTTLE         | 1    |         |
| 2       | 13315-99L00 | BRACKET COMP,THROTTLE BODY | 1    |         |
| 3       | 01550-0820C | BOLT,EXH PIPE STIFFENER    | 2    |         |
| 4       | 01550-0860C | BOLT,COLLECTOR BRKT NO.2   | 4    |         |

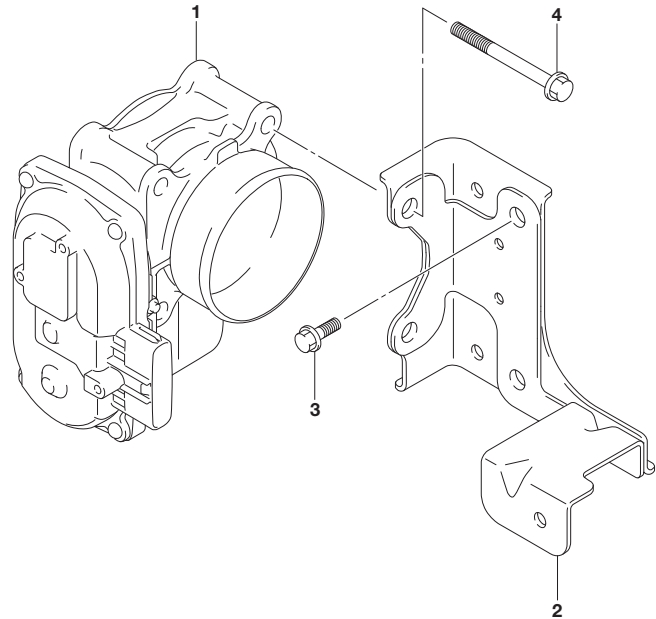

**FIG.175A (1-C-10) OIL PUMP**

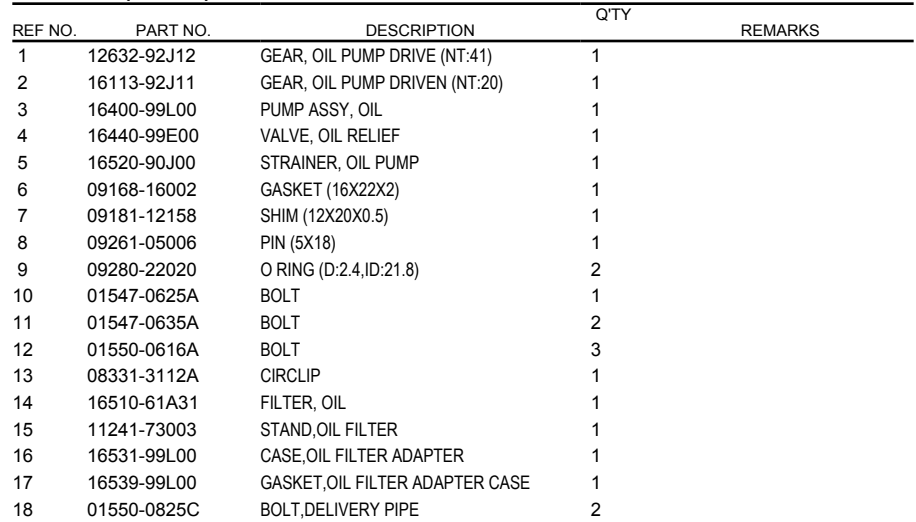


FIG.180A

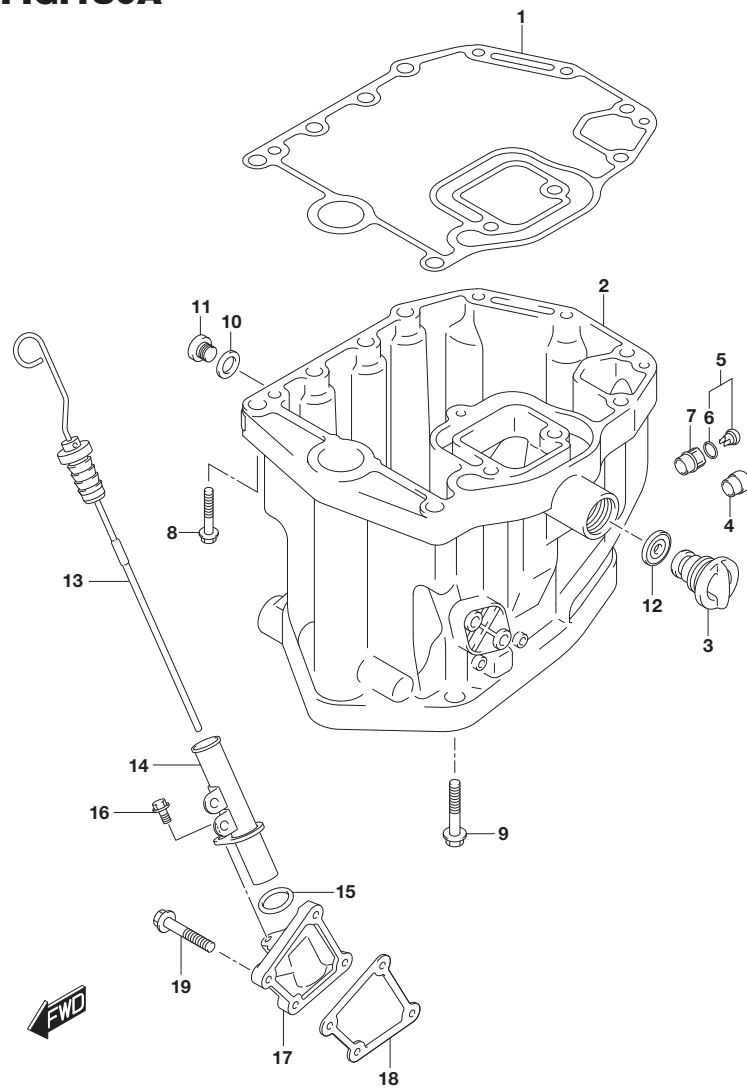


FIG.180A (1-C-11) OIL PAN

| REF NO. | PART NO.        | DESCRIPTION                    | Q'TY | REMARKS   |
|---------|-----------------|--------------------------------|------|-----------|
| 1       | 11489-90J10     | GASKET, OIL PAN                | 1    |           |
| 2-1     | 11501-90J20-YAY | PAN, OIL (BLACK)               | 1    |           |
| 2-2     | 11501-90J20-QTN | PAN, OIL (WHITE)               | 1    |           |
| 3       | 17913-93J00     | PLUG, WATER                    | 1    |           |
| 4       | 43112-99E00     | PIPE, EXHAUST                  | 1    |           |
| 5       | 61150-99E01     | COVER ASSY, WATER INDICATOR    | 1    |           |
| 6       | 09280-09016     | .O RING (D:1.9,ID:8.8)         | 1    |           |
| 7       | 61155-99E01     | TUBE, WATER INDICATOR          | 1    |           |
| 8       | 09116-08178     | BOLT (8X40)                    | 3    |           |
| 9       | 09116-10129     | BOLT (10X160)                  | 8    |           |
| 10      | 09168-12012     | GASKET (12.5X20X2.5)           | 1    |           |
| 11      | 09248-12009     | PLUG (12X18.65)                | 1    | OIL DRAIN |
| 12      | 17914-93J01     | GASKET, WATER PLUG             | 1    |           |
| 13      | 16910-99L00     | GAUGE, OIL LEVEL               | 1    |           |
| 14      | 16930-99L00     | GUIDE, OIL LEVEL               | 1    |           |
| 15      | 09280-21015     | O RING (D:2.1,ID:8.8)          | 1    |           |
| 16      | 01550-0616C     | BOLT                           | 1    |           |
| 17      | 16934-99L00     | CASE,OIL LEVEL GUIDE           | 1    |           |
| 18      | 16941-99L00     | GASKET,OIL LVL GAGE GUIDE CASE | 1    |           |
| 19      | 01550-0625C     | BOLT                           | 4    |           |

FIG.204A

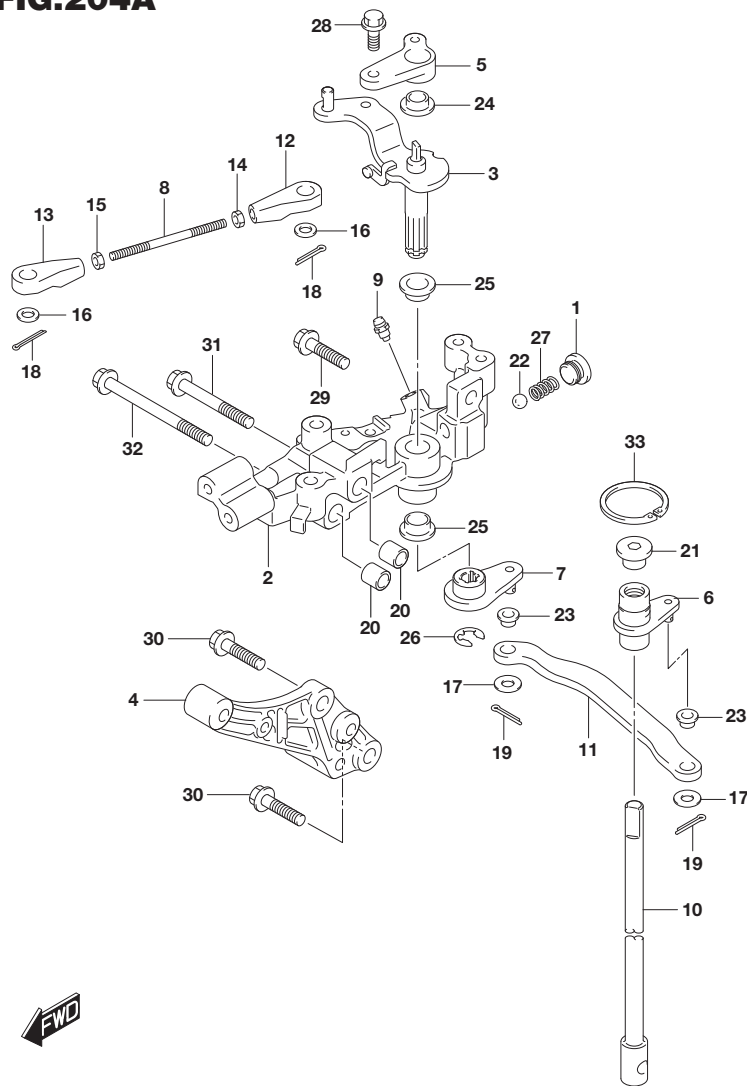


FIG.204A (1-C-12) CLUTCH SHAFT

| REF NO. | PART NO.    | DESCRIPTION                  | Q'TY | REMARKS      |
|---------|-------------|------------------------------|------|--------------|
| 1       | 11118-95J00 | PLUG,NOTCH SPRING            | 1    |              |
| 2       | 19110-99L00 | HOLDER COMP,CLUTCH           | 1    |              |
| 3       | 21110-99L00 | LEVER COMP,CLUTCH            | 1    |              |
| 4       | 21151-99L00 | HOLDER,CLUTCH LEVER          | 1    |              |
| 5       | 21155-99L00 | HOLDER,SHIFT LEVER           | 1    |              |
| 6       | 21210-99L00 | SHAFT COMP,CLUTCH            | 1    |              |
| 7       | 21230-99L00 | ARM COMP,CLUTCH SHAFT        | 1    |              |
| 8       | 21241-99L00 | ROD,CLUTCH LEVER             | 1    |              |
| 9       | 22511-99011 | NIPPLE,GREASE                | 1    |              |
| 10-1    | 23111-90J02 | ROD,CLUTCH(L)                | 1    | W/TRANSOM(L) |
| 10-2    | 23111-90J12 | ROD,CLUTCH(X)                | 1    | W/TRANSOM(X) |
| 11      | 23115-99L00 | LINK,CLUTCH LEVER            | 1    |              |
| 12      | 67467-89J01 | CONNECTOR                    | 1    |              |
| 13      | 67467-89J10 | CONNECTOR,REMOCON CABLE NO.2 | 1    |              |
| 14      | 67471-99E00 | NUT,REMOCON CABLE            | 1    |              |
| 15      | 67471-99E10 | NUT,REMOCON CABLE NO.2       | 1    |              |
| 16      | 09160-06055 | WASHER(7X12X1)               | 2    |              |
| 17      | 09160-06094 | WASHER(6.5X15X1.0)           | 2    |              |
| 18      | 09204-01006 | PIN                          | 2    |              |
| 19      | 09204-01006 | PIN                          | 2    |              |
| 20      | 09206-11019 | PIN,CLUTCH HOLDER            | 2    |              |
| 21      | 09248-12011 | PLUG(12X9)                   | 1    |              |
| 22      | 09260-10005 | BALL                         | 1    |              |
| 23      | 09306-06004 | BUSH                         | 2    |              |
| 24      | 09306-10022 | BUSH                         | 1    |              |
| 25      | 09306-12014 | BUSH,CLUTCH HOLDER           | 2    |              |
| 26      | 09383-08005 | E RING                       | 1    |              |
| 27      | 09440-07071 | SPRING                       | 1    |              |
| 28      | 01550-0616C | BOLT                         | 1    |              |
| 29      | 01550-0825C | BOLT,DELIVERY PIPE           | 1    |              |
| 30      | 01550-0830C | BOLT                         | 2    |              |
| 31      | 01550-0855C | BOLT                         | 1    |              |
| 32      | 01550-0880C | BOLT,CLUTCH HOLDER NO.1      | 1    |              |
| 33      | 08331-41359 | CIRCLIP                      | 1    |              |



FIG.210A

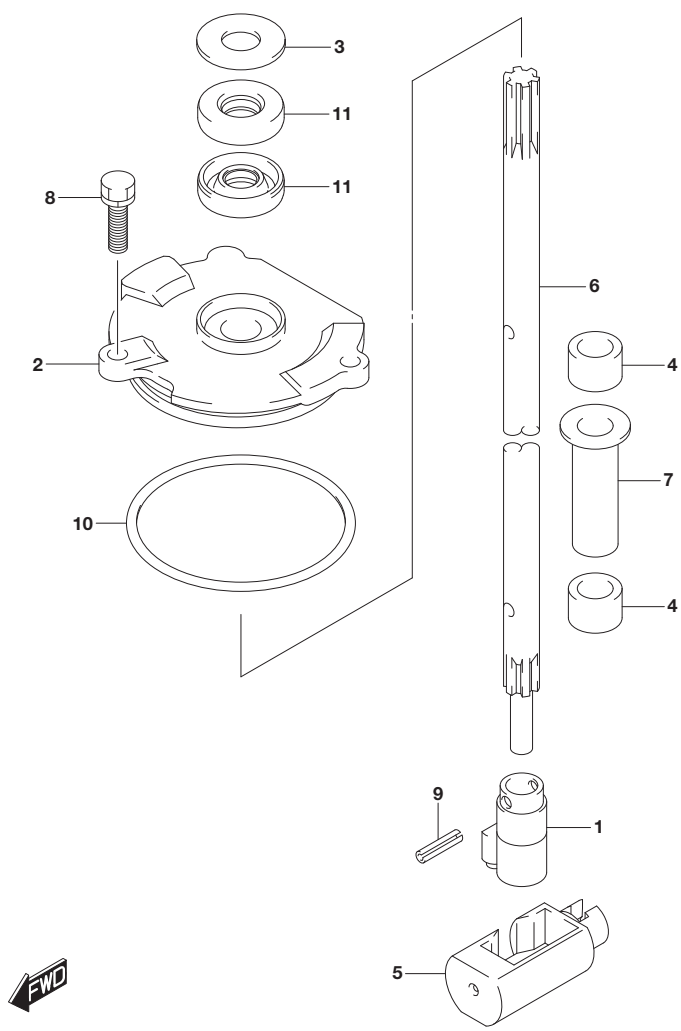


FIG.210A (1-C-13) SHIFT ROD (DF140BG)

| REF NO. | PART NO.    | DESCRIPTION                   | Q'TY | REMARKS      |
|---------|-------------|-------------------------------|------|--------------|
| 1       | 25131-92J01 | YOKE, SHIFTER                 | 1    |              |
| 2       | 25141-92J01 | HOUSING, SHIFT ROD GUIDE      | 1    |              |
| 3       | 25222-90J01 | COVER, SFT GUIDE HSG OIL SEAL | 1    |              |
| 4       | 25232-90J00 | MAGNET, GEAR CASE             | 2    |              |
| 5       | 25321-92J10 | SLIDER, SHIFT HORIZONTAL      | 1    |              |
| 6-1     | 25111-92J00 | ROD ASSY, SHIFT (L)           | 1    | W/TRANSOM(L) |
| 6-2     | 25111-92J10 | ROD ASSY, SHIFT (X)           | 1    | W/TRANSOM(X) |
| 7       | 41226-97E00 | BUSH                          | 1    |              |
| 8       | 29116-93J00 | BOLT (6X20)                   | 2    |              |
| 9       | 09205-04014 | SPRING PIN (4X14)             | 2    |              |
| 10      | 09280-69001 | O RING (D:3.1, ID:68.5)       | 1    |              |
| 11      | 09283-10011 | OIL SEAL (10X22X8)            | 2    |              |

DF140BG E11  
DF140BG E40

FIG.210B

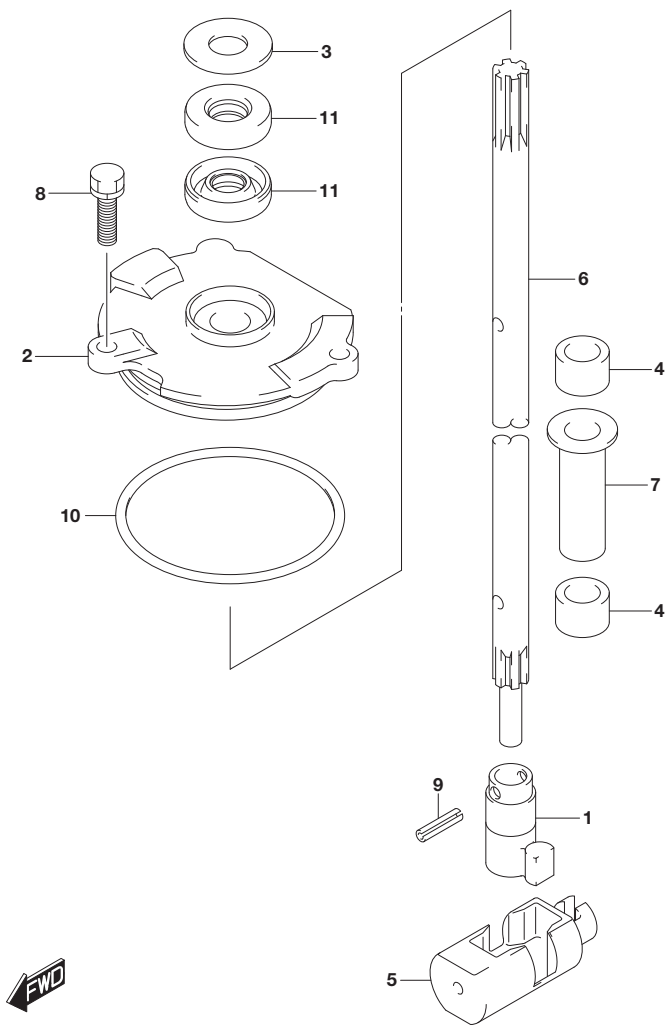


FIG.210B (1-C-14) SHIFT ROD (DF140BZG)

| REF NO. | PART NO.    | DESCRIPTION                   | Q'TY | REMARKS      |
|---------|-------------|-------------------------------|------|--------------|
| 1       | 25131-92J01 | YOKE, SHIFTER                 | 1    |              |
| 2       | 25141-92J01 | HOUSING, SHIFT ROD GUIDE      | 1    |              |
| 3       | 25222-90J01 | COVER, SFT GUIDE HSG OIL SEAL | 1    |              |
| 4       | 25232-90J00 | MAGNET, GEAR CASE             | 2    |              |
| 5       | 25321-92J20 | SLIDER, SHIFT HORIZONTAL      | 1    |              |
| 6-1     | 25111-92J00 | ROD ASSY, SHIFT (L)           | 1    | W/TRANSOM(L) |
| 6-2     | 25111-92J10 | ROD ASSY, SHIFT (X)           | 1    | W/TRANSOM(X) |
| 7       | 41226-97E00 | BUSH                          | 1    |              |
| 8       | 29116-93J00 | BOLT (6X20)                   | 2    |              |
| 9       | 09205-04014 | SPRING PIN (4X14)             | 2    |              |
| 10      | 09280-69001 | O RING (D:3.1, ID:68.5)       | 1    |              |
| 11      | 09283-10011 | OIL SEAL (10X22X8)            | 2    |              |

DF140BZG E11  
DF140BZG E40





FIG.220A

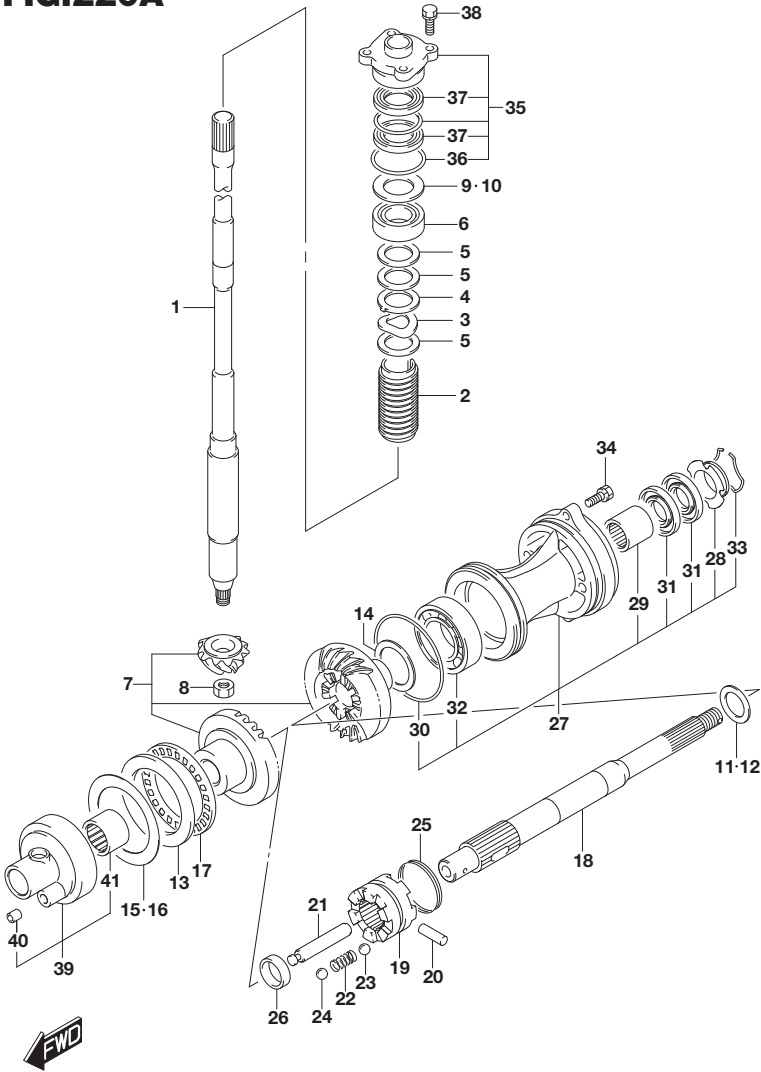


FIG.220A (1-C-15) TRANSMISSION (DF140BG)

| REF NO. | PART NO.    | DESCRIPTION              | Q'TY | REMARKS          |
|---------|-------------|--------------------------|------|------------------|
| 1-1     | 57110-92J60 | SHAFT ASSY, DRIVE (L)    | 1    | W/TRANSOM(L)     |
| 1-2     | 57110-92J70 | SHAFT ASSY, DRIVE (X)    | 1    | W/TRANSOM(X)     |
| 2       | 57133-90J02 | COLLAR, DRIVE SHAFT      | 1    |                  |
| 3       | 09164-31001 | WASHER                   | 1    | DRIVE SHAFT WAVE |
| 4       | 09169-31001 | WASHER                   | 1    | DRIVE SHAFT NO.1 |
| 5       | 09181-31001 | WASHER (31X46X2)         | 3    | DRIVE SHAFT NO.2 |
| 6       | 09265-25046 | BEARING (25X52X19.25)    | 1    |                  |
| 7       | 57300-99L10 | PINION/GEAR SET (NT:25)  | 1    |                  |
| 8       | 09140-14024 | NUT                      | 1    |                  |
| 9       | 57500-87873 | SHIM SET, DRIVE SHAFT    | 1    |                  |
| 10-1    | 09181-40186 | .SHIM (T:0.50)           | 1    |                  |
| 10-2    | 09181-41002 | .SHIM (T:0.55)           | 1    |                  |
| 10-3    | 09181-41003 | .SHIM (T:0.60)           | 1    |                  |
| 10-4    | 09181-41004 | .SHIM (T:0.65)           | 1    |                  |
| 10-5    | 09181-41005 | .SHIM (T:0.70)           | 1    |                  |
| 10-6    | 09181-41006 | .SHIM (T:0.75)           | 1    |                  |
| 10-7    | 09181-40190 | .SHIM (T:0.80)           | 1    |                  |
| 10-8    | 09181-41008 | .SHIM (T:0.85)           | 1    |                  |
| 10-9    | 09181-41009 | .SHIM (T:0.90)           | 1    |                  |
| 10-10   | 09181-41010 | .SHIM (T:0.95)           | 1    |                  |
| 10-11   | 09181-40195 | .SHIM (T:1.00)           | 1    |                  |
| 10-12   | 09181-41012 | .SHIM (T:1.05)           | 1    |                  |
| 10-13   | 09181-41013 | .SHIM (T:1.10)           | 1    |                  |
| 10-14   | 09181-41014 | .SHIM (T:1.15)           | 1    |                  |
| 11      | 57500-87861 | SHIM SET, PROP SHAFT REV | 1    |                  |
| 12-1    | 08211-30382 | .WASHER (T:1.5)          | 1    |                  |
| 12-2    | 09160-30036 | .WASHER (T:1.7)          | 1    |                  |
| 12-3    | 09160-30037 | .WASHER (T:1.9)          | 1    |                  |
| 12-4    | 09160-30038 | .WASHER (T:2.1)          | 1    |                  |
| 12-5    | 09160-30039 | .WASHER (T:2.3)          | 1    |                  |

FIG.220A

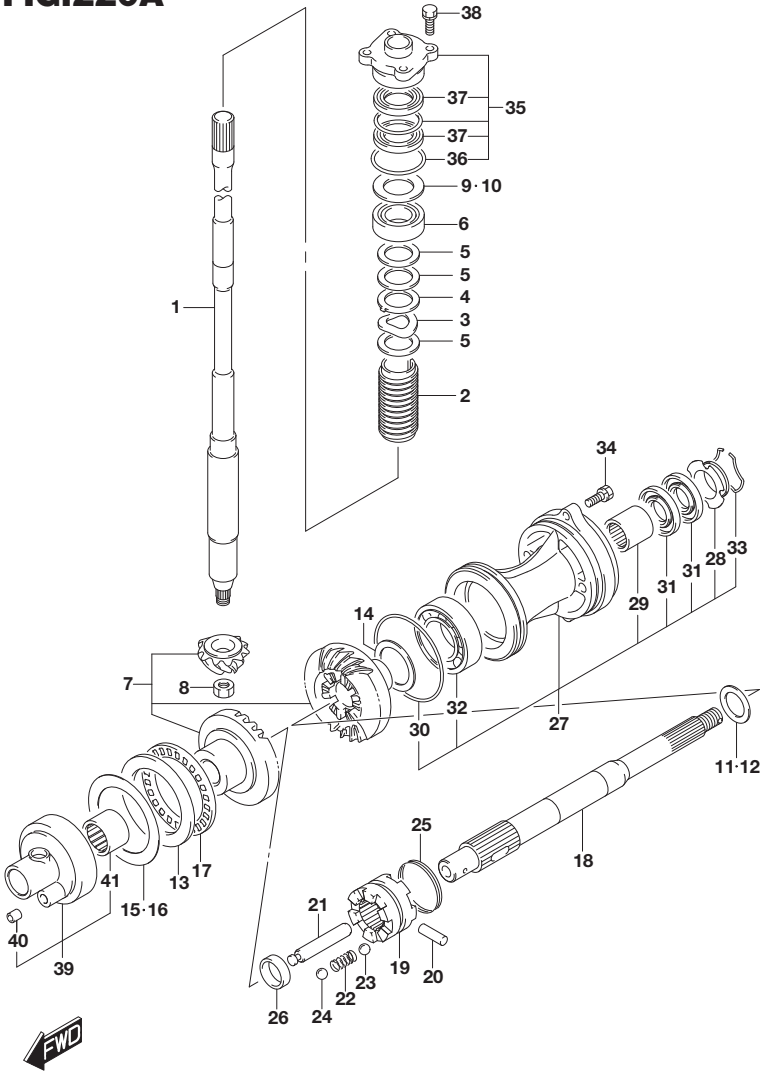


FIG.220A (1-D-2) TRANSMISSION (DF140BG)

| REF NO. | PART NO.    | DESCRIPTION           | Q'TY | REMARKS  |
|---------|-------------|-----------------------|------|----------|
| 12-6    | 09160-30041 | .WASHER (T:2.4)       | 1    |          |
| 12-7    | 09160-30042 | .WASHER (T:2.6)       | 1    |          |
| 12-8    | 09160-30043 | .WASHER (T:2.7)       | 1    |          |
| 12-9    | 09160-30044 | .WASHER (T:2.8)       | 1    |          |
| 13      | 09160-70002 | WASHER (70X95X5.25)   | 1    | FWD GEAR |
| 14-1    | 09181-45003 | SHIM (T:1.0)          | 1    | REV GEAR |
| 14-2    | 09181-45004 | SHIM (T:1.1)          | 1    | REV GEAR |
| 14-3    | 09181-45005 | SHIM (T:1.2)          | 1    | REV GEAR |
| 14-4    | 09181-45006 | SHIM (T:1.3)          | 1    | REV GEAR |
| 14-5    | 09181-45007 | SHIM (T:1.4)          | 1    | REV GEAR |
| 14-6    | 09181-45008 | SHIM (T:1.5)          | 1    | REV GEAR |
| 14-7    | 09181-45009 | SHIM (T:1.6)          | 1    | REV GEAR |
| 15      | 57500-92813 | SHIM SET, FWD GEAR    | 1    | FWD GEAR |
| 16-1    | 09181-70001 | .SHIM (T:0.70)        | 1    | FWD GEAR |
| 16-2    | 09181-70002 | .SHIM (T:0.80)        | 1    | FWD GEAR |
| 16-3    | 09181-70003 | .SHIM (T:0.90)        | 1    | FWD GEAR |
| 16-4    | 09181-70004 | .SHIM (T:1.00)        | 1    | FWD GEAR |
| 16-5    | 09181-70006 | .SHIM (T:0.60)        | 1    | FWD GEAR |
| 16-6    | 09181-70009 | .SHIM (T:0.65)        | 1    | FWD GEAR |
| 16-7    | 09181-70010 | .SHIM (T:0.75)        | 1    | FWD GEAR |
| 16-8    | 09181-70011 | .SHIM (T:0.85)        | 1    | FWD GEAR |
| 16-9    | 09181-70012 | .SHIM (T:0.95)        | 1    | FWD GEAR |
| 16-10   | 09181-70008 | .SHIM (T:0.55)        | 1    | FWD GEAR |
| 17      | 09269-70001 | BEARING (70X95X4)     | 1    |          |
| 18      | 57610-99L00 | SHAFT ASSY, PROPELLER | 1    |          |
| 19      | 57621-99L00 | SHIFTER, CLUTCH DOG   | 1    |          |
| 20      | 09202-07002 | PIN (7X48)            | 1    |          |

FIG.220A


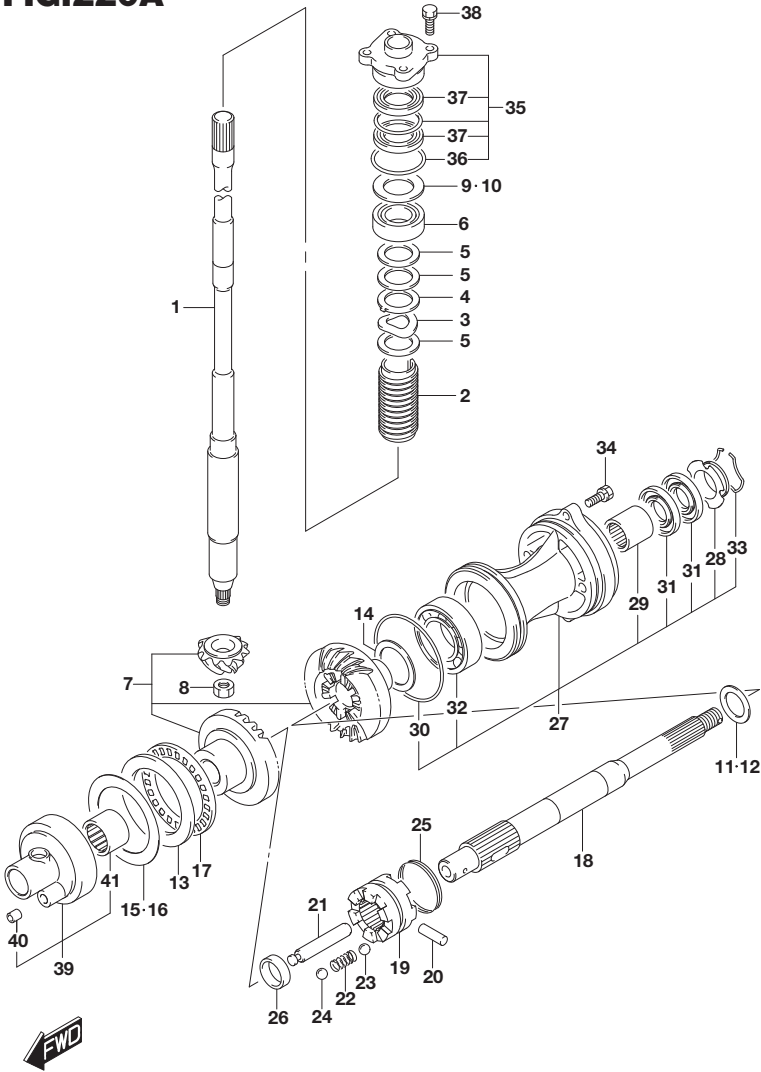


FIG.220A (1-D-3) TRANSMISSION (DF140BG)

| REF NO. | PART NO.        | DESCRIPTION                   | Q'TY | REMARKS |
|---------|-----------------|-------------------------------|------|---------|
| 21      | 57631-92J10     | PIN, CONNECTOR                | 1    |         |
| 22      | 09440-09040     | SPRING                        | 1    |         |
| 23      | 06111-07004     | BALL                          | 2    | NO.1    |
| 24      | 06111-11004     | BALL                          | 2    | NO.2    |
| 25      | 09440-49004     | SPRING                        | 1    |         |
| 26      | 57616-90J00     | SPACER, CLUTCH DOG FWD        | 1    |         |
| 27-1    | 56120-92J01-YAY | HOUSING, PROP SFT BRG (BLACK) | 1    |         |
| 27-2    | 56120-92J01-QTN | HOUSING, PROP SFT BRG (WHITE) | 1    |         |
| 28      | 56123-92J00     | .WASHER, OIL SEAL PROTECTOR   | 1    |         |
| 29      | 09263-30051     | .BEARING (30X37X26)           | 1    |         |
| 30      | 09280-97001     | .O RING (D:3.5,ID:95)         | 1    |         |
| 31      | 09282-30007     | .OIL SEAL (30X50X6)           | 2    |         |
| 32      | 08113-62090     | .BEARING                      | 1    |         |
| 33      | 09387-52001     | .RING SET                     | 1    |         |
| 34      | 09116-08122     | BOLT (8X30)                   | 2    |         |
| 35      | 56130-90J00     | HOUSING, DRIVESHAFT BRG       | 1    |         |
| 36      | 09280-46004     | .O RING (D:3.5,ID:45.7)       | 1    |         |
| 37      | 09282-24004     | .OIL SEAL (24X40X7)           | 2    |         |
| 38      | 09117-08110     | BOLT (8X25)                   | 4    |         |
| 39      | 56140-92J00     | HOUSING, FWD GEAR BRG         | 1    |         |
| 40      | 09206-09012     | .PIN (7.4X9X10)               | 1    |         |
| 41      | 09263-50001     | .BEARING (50X62X25)           | 1    |         |

DF140BG E11  
DF140BG E40

# FIG.220B

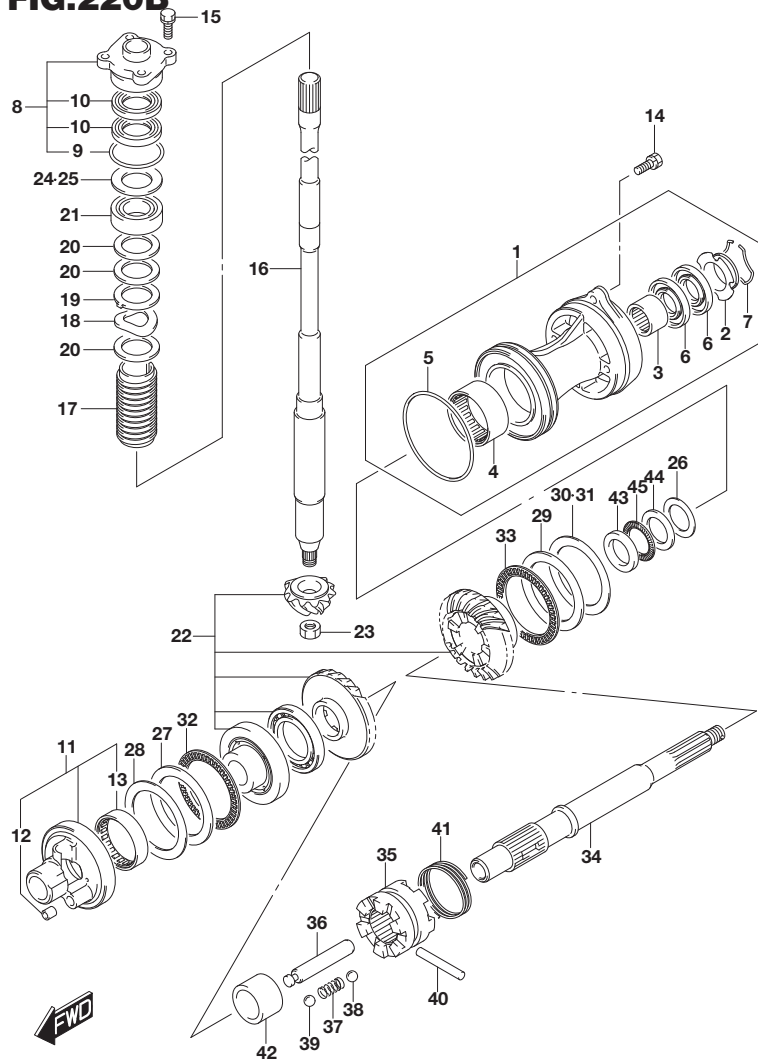

DF140BG\_E11\_021\_220B  
TRANSMISSION

# FIG.220B (1-D-4) TRANSMISSION (DF140BZG)

| REF NO. | PART NO.        | DESCRIPTION                   | Q'TY | REMARKS          |
|---------|-----------------|-------------------------------|------|------------------|
| 1-1     | 56120-92J12-YAY | HOUSING, PROP SFT BRG (BLACK) | 1    |                  |
| 1-2     | 56120-92J12-QTN | HOUSING, PROP SFT BRG (WHITE) | 1    |                  |
| 2       | 56123-92J00     | .WASHER, OIL SEAL PROTECTOR   | 1    |                  |
| 3       | 09263-30051     | .BEARING (30X37X26)           | 1    |                  |
| 4       | 09263-50001     | .BEARING (50X62X25)           | 1    |                  |
| 5       | 09280-97001     | .O RING (D:3.5,ID:95)         | 1    |                  |
| 6       | 09282-30007     | .OIL SEAL (30X50X6)           | 2    |                  |
| 7       | 09387-52001     | .RING SET                     | 1    |                  |
| 8       | 56130-90J00     | HOUSING, DRIVE SHAFT BRG      | 1    |                  |
| 9       | 09280-46004     | .O RING (D:3.5,ID:45.7)       | 1    |                  |
| 10      | 09282-24004     | .OIL SEAL (24X40X7)           | 2    |                  |
| 11      | 56140-92J30     | HOUSING, REV GEAR BRG         | 1    |                  |
| 12      | 09206-09012     | .PIN (7.4X9X10)               | 1    |                  |
| 13      | 09263-45004     | .BEARING (45X52X16)           | 1    |                  |
| 14      | 09116-08122     | BOLT (8X30)                   | 2    |                  |
| 15      | 09117-08110     | BOLT (8X25)                   | 4    |                  |
| 16-1    | 57110-92J60     | SHAFT, DRIVE (L)              | 1    | W/TRANSOM(L)     |
| 16-2    | 57110-92J70     | SHAFT, DRIVE (X)              | 1    | W/TRANSOM(X)     |
| 17      | 57133-90J02     | COLLAR, DRIVE SHAFT           | 1    |                  |
| 18      | 09164-31001     | WASHER                        | 1    | DRIVE SHAFT WAVE |
| 19      | 09169-31001     | WASHER                        | 1    | DRIVE SHAFT NO.1 |
| 20      | 09181-31001     | WASHER (31X46X2)              | 3    | DRIVE SHAFT NO.2 |
| 21      | 09265-25046     | BEARING (25X52X19.25)         | 1    |                  |
| 22      | 57300-99L30     | PINION/GEAR SET (NT:25)       | 1    |                  |
| 23      | 09140-14024     | NUT                           | 1    |                  |
| 24      | 57500-87873     | SHIM SET, DRIVE SHAFT         | 1    |                  |
| 25-1    | 09181-40186     | .SHIM (T:0.50)                | 1    |                  |
| 25-2    | 09181-41002     | .SHIM (T:0.55)                | 1    |                  |
| 25-3    | 09181-41003     | .SHIM (T:0.60)                | 1    |                  |
| 25-4    | 09181-41004     | .SHIM (T:0.65)                | 1    |                  |

DF140BG\_E11\_021

FIG.220B

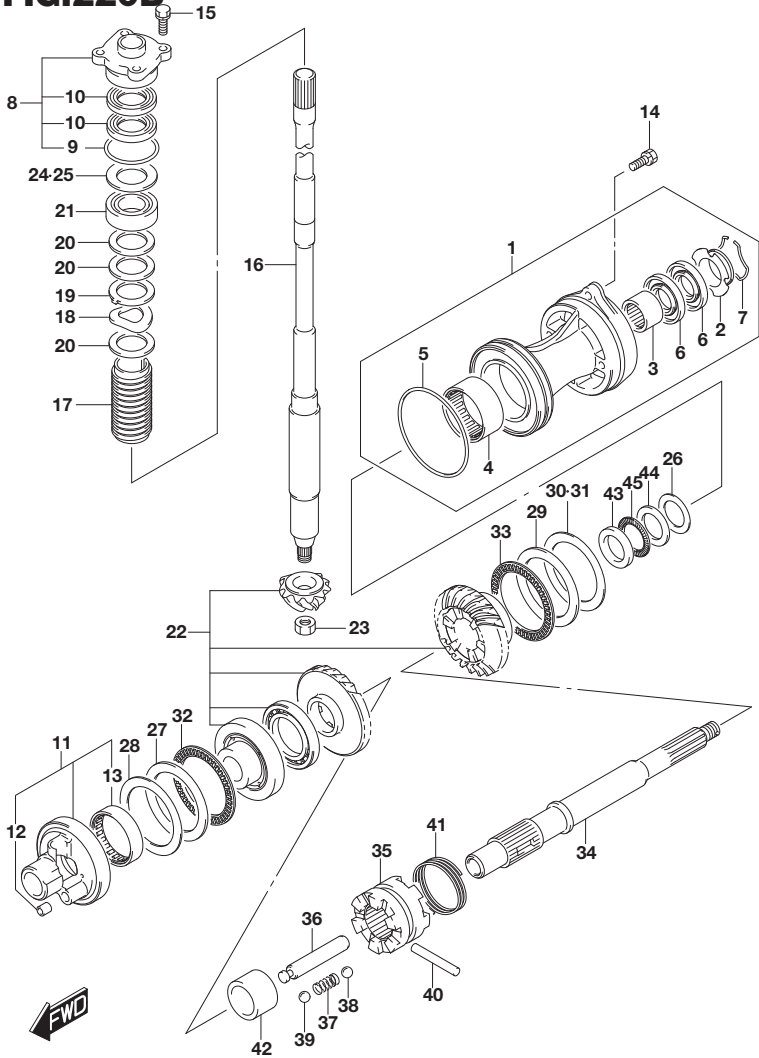


FIG.220B (1-D-5) TRANSMISSION (DF140BZG)

| REF NO. | PART NO.    | DESCRIPTION      | Q'TY | REMARKS       |
|---------|-------------|------------------|------|---------------|
| 25-5    | 09181-41005 | .SHIM (T:0.70)   | 1    |               |
| 25-6    | 09181-41006 | .SHIM (T:0.75)   | 1    |               |
| 25-7    | 09181-40190 | .SHIM (T:0.80)   | 1    |               |
| 25-8    | 09181-41008 | .SHIM (T:0.85)   | 1    |               |
| 25-9    | 09181-41009 | .SHIM (T:0.90)   | 1    |               |
| 25-10   | 09181-41010 | .SHIM (T:0.95)   | 1    |               |
| 25-11   | 09181-40195 | .SHIM (T:1.00)   | 1    |               |
| 25-12   | 09181-41012 | .SHIM (T:1.05)   | 1    |               |
| 25-13   | 09181-41013 | .SHIM (T:1.10)   | 1    |               |
| 25-14   | 09181-41014 | .SHIM (T:1.15)   | 1    |               |
| 26-1    | 09160-35015 | WASHER (T:0.60)  | 1    | PROP SAFT REV |
| 26-2    | 09160-35014 | WASHER (T:0.70)  | 1    | PROP SAFT REV |
| 26-3    | 09160-35013 | WASHER (T:0.80)  | 1    | PROP SAFT REV |
| 26-4    | 09160-35006 | WASHER (T:0.90)  | 1    | PROP SAFT REV |
| 26-5    | 09160-35008 | WASHER (T:0.95)  | 1    | PROP SAFT REV |
| 26-6    | 09160-35002 | WASHER (T:1.00)  | 1    | PROP SAFT REV |
| 26-7    | 09160-35009 | WASHER (T:1.05)  | 1    | PROP SAFT REV |
| 26-8    | 09160-35003 | WASHER (T:1.10)  | 1    | PROP SAFT REV |
| 26-9    | 09160-35010 | WASHER (T:1.15)  | 1    | PROP SAFT REV |
| 27      | 09160-60011 | WASHER (60X85X3) | 1    | REV GEAR      |
| 28-1    | 09160-60008 | WASHER (T:0.8)   | 1    | REV GEAR      |
| 28-2    | 09160-60009 | WASHER (T:0.9)   | 1    | REV GEAR      |
| 28-3    | 09160-60003 | WASHER (T:1.0)   | 1    | REV GEAR      |
| 28-4    | 09160-60004 | WASHER (T:1.1)   | 1    | REV GEAR      |
| 28-5    | 09160-60005 | WASHER (T:1.2)   | 1    | REV GEAR      |
| 28-6    | 09160-60006 | WASHER (T:1.3)   | 1    | REV GEAR      |
| 28-7    | 09160-60007 | WASHER (T:1.4)   | 1    | REV GEAR      |

FIG.220B


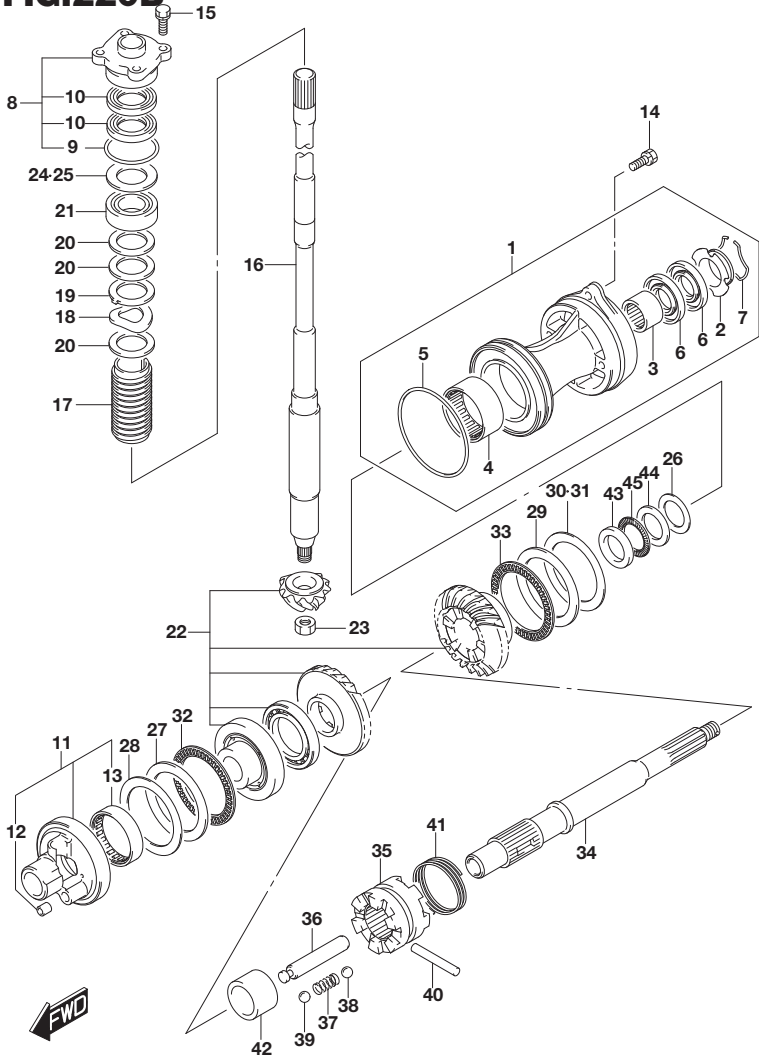


FIG.220B (1-D-6) TRANSMISSION (DF140BZG)

| REF NO. | PART NO.    | DESCRIPTION            | Q'TY | REMARKS       |
|---------|-------------|------------------------|------|---------------|
| 29      | 09160-70005 | WASHER (70X95X2)       | 1    | FWD GEAR      |
| 30      | 57500-92813 | SHIM SET, FWD GEAR     | 1    | FWD GEAR      |
| 31-1    | 09181-70006 | .SHIM (T:0.60)         | 1    | FWD GEAR      |
| 31-2    | 09181-70009 | .SHIM (T:0.65)         | 1    | FWD GEAR      |
| 31-3    | 09181-70001 | .SHIM (T:0.70)         | 1    | FWD GEAR      |
| 31-4    | 09181-70010 | .SHIM (T:0.75)         | 1    | FWD GEAR      |
| 31-5    | 09181-70002 | .SHIM (T:0.80)         | 1    | FWD GEAR      |
| 31-6    | 09181-70011 | .SHIM (T:0.85)         | 1    | FWD GEAR      |
| 31-7    | 09181-70003 | .SHIM (T:0.90)         | 1    | FWD GEAR      |
| 31-8    | 09181-70012 | .SHIM (T:0.95)         | 1    | FWD GEAR      |
| 31-9    | 09181-70004 | .SHIM (T:1.00)         | 1    | FWD GEAR      |
| 31-10   | 09181-70008 | .SHIM (T:0.55)         | 1    | FWD GEAR      |
| 32      | 09269-60001 | BEARING (60X85X3)      | 1    | REV           |
| 33      | 09269-70001 | BEARING (70X95X4)      | 1    | FWD           |
| 34      | 57610-99L10 | SHAFT, PROPELLER       | 1    |               |
| 35      | 57621-99L00 | SHIFTER, CLUTCH DOG    | 1    |               |
| 36      | 57631-92J10 | PIN, CONNECTOR         | 1    |               |
| 37      | 09440-09040 | SPRING                 | 1    |               |
| 38      | 06111-07004 | BALL                   | 2    | NO.1          |
| 39      | 06111-11004 | BALL                   | 2    | NO.2          |
| 40      | 09202-07002 | PIN (7X48)             | 1    |               |
| 41      | 09440-49004 | SPRING                 | 1    |               |
| 42      | 57616-92J00 | SPACER, CLUTCH DOG FWD | 1    |               |
| 43      | 09160-30055 | WASHER (30X47X6)       | 1    | PROP SAFT REV |
| 44      | 09160-30056 | WASHER (32X47X3)       | 1    | PROP SAFT REV |
| 45      | 09269-30014 | BEARING (30X47X2)      | 1    | PROP SAFT REV |

DF140BZG E11  
DF140BZG E40

FIG.301A

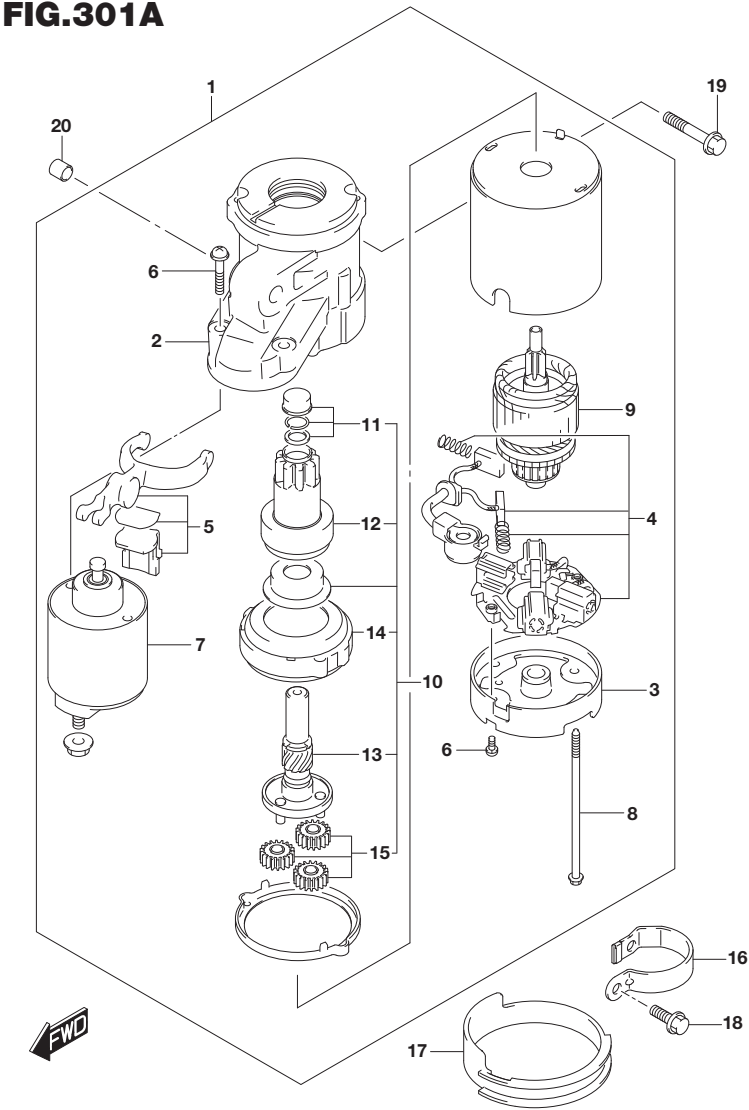


DF140BG\_E11\_021\_301A  
STARTING MOTOR

FIG.301A (1-D-7) STARTING MOTOR

| REF NO. | PART NO.    | DESCRIPTION                 | Q'TY | REMARKS |
|---------|-------------|-----------------------------|------|---------|
| 1       | 31100-92J00 | STARTING MOTOR              | 1    |         |
| 2       | 31150-92J00 | .HOUSING, FRONT             | 1    |         |
| 3       | 31170-92J00 | .HOUSING, REAR              | 1    |         |
| 4       | 31173-92J00 | .HOLDER ASSY, BRUSH         | 1    |         |
| 5       | 31191-92J00 | .LEVER, SHIFT               | 1    |         |
| 6       | 31192-92J00 | .SCREW SET                  | 1    |         |
| 7       | 31220-92J00 | .SWITCH ASSY                | 1    |         |
| 8       | 31261-75F10 | .BOLT                       | 2    |         |
| 9       | 31311-63J00 | .ARMATURE                   | 1    |         |
| 10      | 31340-92J00 | .CLUTCH SET, STARTING MOTOR | 1    |         |
| 11      | 31312-92J00 | ..SET, PINION STOPPER       | 1    |         |
| 12      | 31320-92J00 | ..PINION                    | 1    |         |
| 13      | 31341-92J00 | ..SHAFT, PINION             | 1    |         |
| 14      | 31343-63J00 | ..INTERNAL GEAR             | 1    |         |
| 15      | 31344-63J00 | ..PLANETARY GEAR            | 3    |         |
| 16      | 31912-90J00 | BAND, STARTING MOTOR        | 1    |         |
| 17      | 31918-92J01 | DAMPER, LOWER               | 1    |         |
| 18      | 01550-08207 | BOLT                        | 2    |         |
| 19      | 01550-1050C | BOLT                        | 2    |         |
| 20      | 04211-13149 | PIN                         | 2    |         |

DF140BG\_E11\_021

FIG.303A

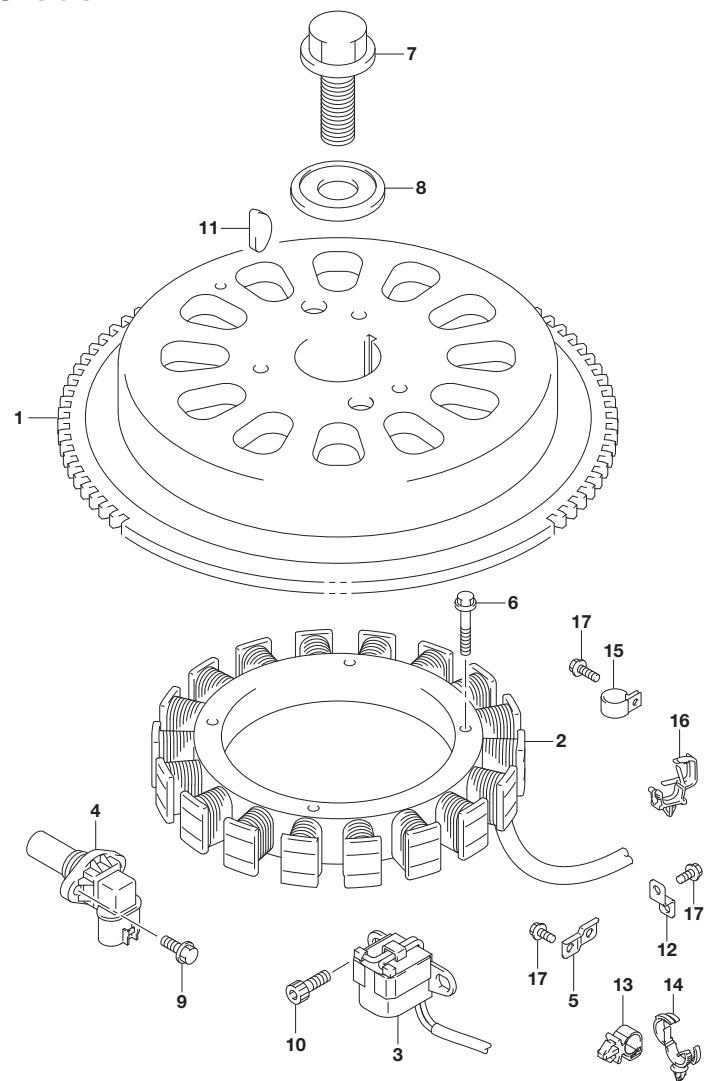

DF140BG\_E11\_021\_303A  
MAGNETO

FIG.303A (1-D-8) MAGNETO

| REF NO. | PART NO.    | DESCRIPTION            | Q'TY | REMARKS |
|---------|-------------|------------------------|------|---------|
| 1       | 32102-99L00 | FLYWHEEL               | 1    |         |
| 2       | 32120-99L00 | COIL, BATTERY CHARGING | 1    |         |
| 3       | 32160-99L00 | COIL, IGNITION TIMING  | 1    |         |
| 4       | 33220-64L10 | SENSOR, CAM POSITION   | 1    |         |
| 5       | 36617-93J00 | BRACKET,HARNESS        | 1    |         |
| 6       | 09103-06231 | BOLT (6X35)            | 4    |         |
| 7       | 09103-16004 | BOLT (16X50)           | 1    |         |
| 8       | 09160-16048 | WASHER (16.5X60X7)     | 1    |         |
| 9       | 01550-0616C | BOLT                   | 1    |         |
| 10      | 09106-05030 | BOLT (5X10)            | 2    |         |
| 11      | 08341-31059 | KEY                    | 1    |         |
| 12      | 36617-93J10 | BRACKET,HARNESS        | 1    |         |
| 13      | 09403-11321 | CLAMP                  | 1    |         |
| 14      | 09403-13311 | CLAMP                  | 1    |         |
| 15      | 09403-13413 | CLAMP                  | 1    |         |
| 16      | 09403-16313 | CLAMP,STATOR LEAD      | 1    |         |
| 17      | 01550-0612C | BOLT                   | 3    |         |

DF140BG\_E11\_021



FIG.310A

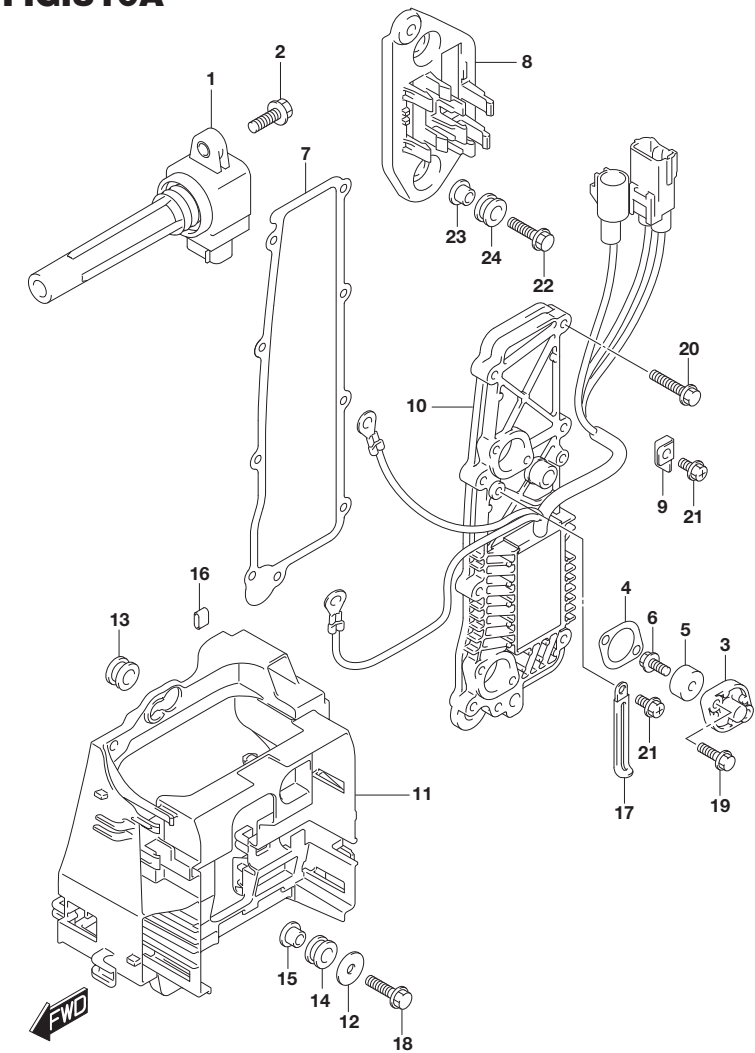


FIG.310A (1-D-9) RECTIFIER/IGNITION COIL

| REF NO. | PART NO.    | DESCRIPTION                | Q'TY | REMARKS |
|---------|-------------|----------------------------|------|---------|
| 1       | 33410-99L00 | COIL ASSY,IGNITION         | 4    |         |
| 2       | 01550-0620C | BOLT                       | 4    |         |
| 3       | 11261-87E10 | COVER, PROTECTION ANODE    | 2    |         |
| 4       | 11265-87E10 | GASKET, PROTECTION COVER   | 2    |         |
| 5-1     | 55321-87J01 | ANODE, PROTECTION          | 2    |         |
| 5-2     | 55321-87J11 | ANODE (MAGNESIUM)          | 1    | OPT     |
| 6       | 09103-06281 | BOLT (6X14)                | 2    |         |
| 7       | 14151-90J00 | GASKET, RECTIFIER          | 1    |         |
| 8       | 36616-99L20 | HOLDER,CONNECTOR           | 1    |         |
| 9       | 36617-88L00 | BRACKET,PTT CABLE CLAMP    | 1    |         |
| 10      | 32800-99L00 | RECTIFIER & REGULATOR ASSY | 1    |         |
| 11      | 32890-99L00 | HOLDER, ELECTRIC PARTS     | 1    |         |
| 12      | 09160-06084 | WASHER(6.5X18X1.6)         | 1    |         |
| 13      | 09320-10075 | CUSHION                    | 2    |         |
| 14      | 09320-09016 | CUSHION                    | 1    |         |
| 15      | 09169-06062 | WASHER                     | 1    |         |
| 16      | 09329-01007 | CUSHION                    | 1    |         |
| 17      | 29404-93J11 | CLAMP                      | 2    |         |
| 18      | 01550-06257 | BOLT                       | 1    |         |
| 19      | 01550-0620C | BOLT                       | 4    |         |
| 20      | 01550-0630C | BOLT                       | 9    |         |
| 21      | 01550-0612C | BOLT                       | 3    |         |
| 22      | 09116-06517 | BOLT,WITH WASHER           | 2    |         |
| 23      | 09169-06062 | WASHER                     | 2    |         |
| 24      | 09320-09016 | CUSHION                    | 2    |         |

FIG.315A


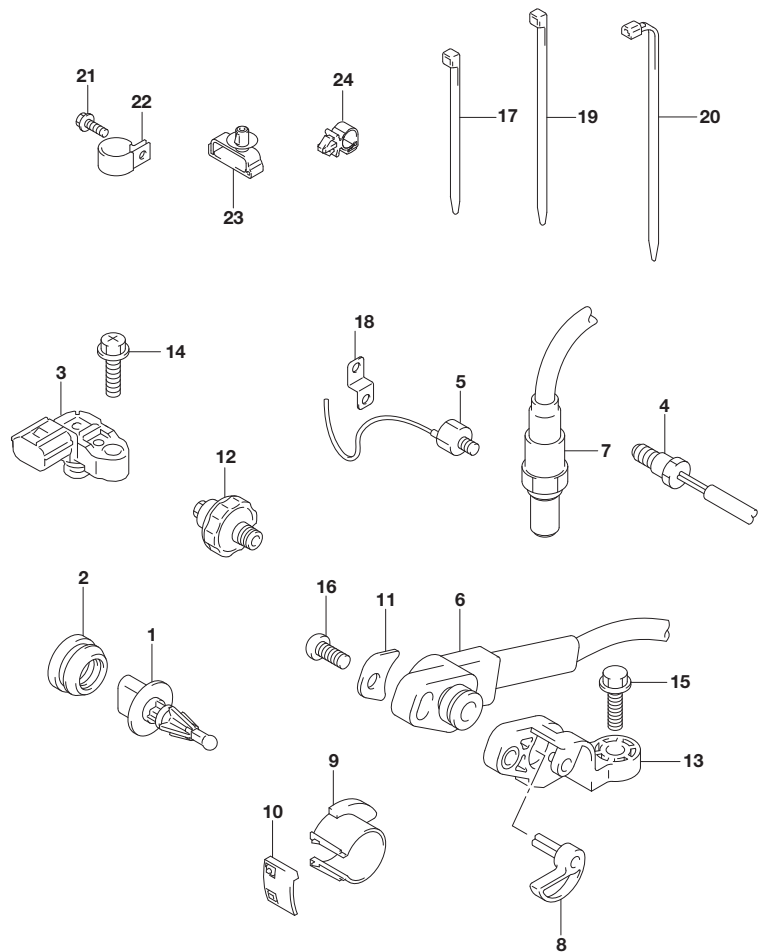


FIG.315A (1-D-10) SENSOR

| REF NO. | PART NO.    | DESCRIPTION               | Q'TY | REMARKS            |
|---------|-------------|---------------------------|------|--------------------|
| 1       | 13650-52G00 | SENSOR, INLET AIR TEMP    | 1    |                    |
| 2       | 13655-87J01 | GROMMET, AIR TEMP SENSOR  | 1    |                    |
| 3       | 18590-59S00 | SENSOR, PRESSURE          | 1    |                    |
| 4       | 34830-87J20 | SENSOR ASSY, EXHAUST TEMP | 2    |                    |
| 5       | 18640-98L01 | SENSOR ASSY, KNOCK        | 1    |                    |
| 6       | 34840-98J03 | SENDER ASSY, TRIM         | 1    |                    |
| 7       | 18213-98J30 | SENSOR, OXYGEN            | 1    |                    |
| 8       | 34841-92J00 | LEVER, TRIM SENSOR        | 1    |                    |
| 9       | 34842-92J01 | CAM, TRIM SENSOR UPPER    | 1    |                    |
| 10      | 34843-87L00 | CAM, TRIM SENSOR LOWER    | 1    |                    |
| 11      | 34846-87L00 | WASHER, TRIM SENSOR       | 1    |                    |
| 12      | 37820-99E02 | SWITCH, OIL PRESSURE      | 1    |                    |
| 13      | 34845-92J00 | BRACKET, TRIM SENSOR      | 1    |                    |
| 14      | 02162-05207 | SCREW                     | 1    |                    |
| 15      | 09103-06093 | BOLT (6X20)               | 1    |                    |
| 16      | 09125-05046 | SCREW (5X12)              | 1    |                    |
| 17      | 09407-10404 | CLAMP (L:100)             | 1    |                    |
| 18      | 36617-93J10 | BRACKET,HARNESS           | 1    | KNOCK SENSOR LEAD  |
| 19      | 09407-14407 | CLAMP (L:145)             | 2    |                    |
| 20      | 09407-18402 | CLAMP (L:165)             | 1    | OXYGEN SENSOR LEAD |
| 21      | 29103-93J00 | BOLT(6X12)                | 1    |                    |
| 22      | 09403-13413 | CLAMP                     | 1    | PTT CABLE          |
| 23      | 09403-07340 | CLAMP                     | 1    | KNOCK SENSOR LEAD  |
| 24      | 09403-11321 | CLAMP                     | 1    | PTT CABLE          |

FIG.322A

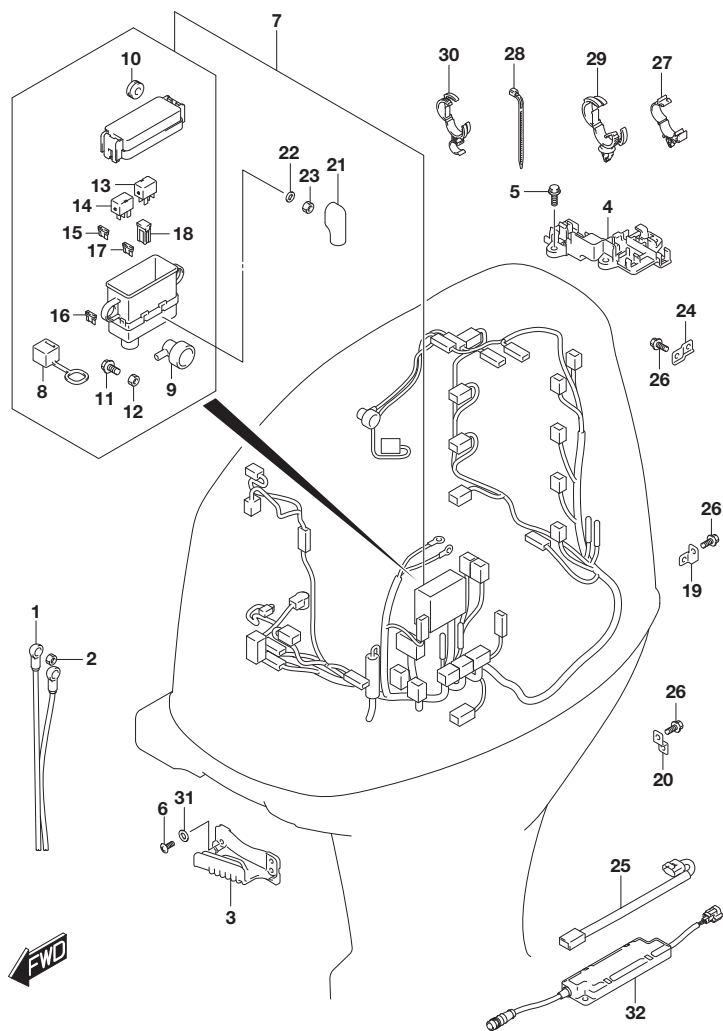

DF140BG\_E11\_021\_322A  
HARNESS

FIG.322A (1-D-11) HARNESS

| REF NO. | PART NO.    | DESCRIPTION               | Q'TY | REMARKS     |
|---------|-------------|---------------------------|------|-------------|
| 1       | 33810-90J30 | CABLE ASSY, STARTER MOTOR | 1    |             |
| 2       | 08316-10087 | NUT                       | 1    |             |
| 3       | 36616-99L00 | HOLDER, CABLE             | 1    |             |
| 4       | 36616-99L10 | HOLDER,CONNECTOR          | 1    |             |
| 5       | 01550-0616C | BOLT                      | 3    |             |
| 6       | 02142-0616C | SCREW (6X16)              | 2    |             |
| 7       | 36610-99L00 | HARNESS ASSY, WIRING      | 1    |             |
| 8       | 33634-96J00 | .CAP,SERVICE CONNECTOR    | 1    |             |
| 9       | 36618-43410 | .CAP, OIL PRESSURE SWITCH | 1    |             |
| 10      | 09320-08510 | .CUSHION (8.5X20X8)       | 2    |             |
| 11      | 01500-06167 | .BOLT                     | 1    |             |
| 12      | 08310-00067 | .NUT                      | 1    | UPPER       |
| 13      | 38860-76F01 | .RELAY ASSY               | 1    | FOR MAIN    |
| 14      | 38860-76F01 | .RELAY ASSY               | 1    | FOR STARTER |
| 15      | 09481-10504 | .FUSE (10A)               | 2    |             |
| 16      | 09481-15504 | .FUSE (15A)               | 3    |             |
| 17      | 09481-30504 | .FUSE (30A)               | 3    |             |
| 18      | 09481-60403 | .FUSE (60A)               | 3    |             |
| 19      | 36617-88L00 | BRACKET,PTT CABLE CLAMP   | 1    |             |
| 20      | 36617-93J10 | BRACKET,HARNESS           | 8    |             |
| 21      | 36612-96J01 | CAP, TERMINAL             | 1    |             |
| 22      | 08321-01067 | LOCK WASHER               | 1    |             |
| 23      | 08310-00067 | NUT                       | 1    |             |
| 24      | 36617-93J00 | BRACKET, HARNESS          | 2    |             |
| 25      | 36611-99L00 | HARNESS ASSY, WIRING SUB  | 1    |             |
| 26      | 01550-0612C | BOLT                      | 10   |             |
| 27      | 09403-11321 | CLAMP                     | 2    |             |
| 28      | 09407-14403 | CLAMP (L:125)             | 3    |             |
| 29      | 09403-13311 | CLAMP                     | 1    |             |
| 30      | 09408-00213 | CLAMP                     | 4    |             |
| 31      | 09169-06053 | WASHER (6.3X16X1)         | 2    |             |
| 32      | 34923-96L01 | UNIT,GATEWAY              | 1    | OPT         |

DF140BG\_E11\_021

FIG.326A


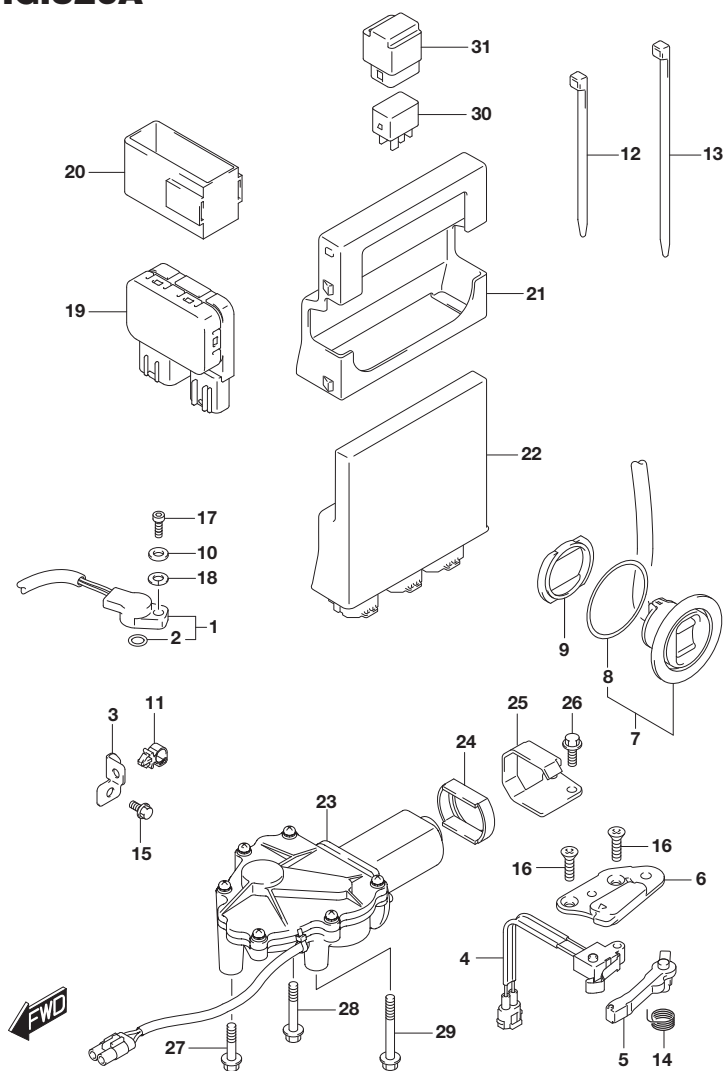


FIG.326A (1-D-12) PTT SWITCH/ENGINE CONTROL UNIT

| REF NO. | PART NO.    | DESCRIPTION                  | Q'TY | REMARKS |
|---------|-------------|------------------------------|------|---------|
| 1       | 13580-98J03 | SENSOR ASSY,SHIFT POSITION   | 1    |         |
| 2       | 13575-40F00 | .O RING                      | 1    |         |
| 3       | 36617-87L20 | CLAMP,HARNESS                | 1    |         |
| 4       | 37721-93J00 | SWITCH ASSY,NEUTRAL          | 1    |         |
| 5       | 37724-99L00 | ARM,NEUTRAL SWITCH           | 1    |         |
| 6       | 37726-99L00 | BRACKET,NEUTRAL SWITCH       | 1    |         |
| 7       | 37850-92J00 | SWITCH ASSY,PTT              | 1    |         |
| 8       | 37856-92J00 | .TAPE,PTT SWITCH             | 1    |         |
| 9       | 37857-92J01 | BUSH,PTT SWITCH              | 1    |         |
| 10      | 09160-05029 | WASHER(5.5X12X0.8)           | 1    |         |
| 11      | 09403-11321 | CLAMP                        | 1    |         |
| 12      | 09407-10404 | CLAMP(L:100)                 | 1    |         |
| 13      | 09407-14407 | CLAMP(L:145)                 | 2    |         |
| 14      | 09448-10006 | SPRING,NEUTRAL SWITCH        | 1    |         |
| 15      | 01550-0612C | BOLT                         | 1    |         |
| 16      | 02122-04167 | SCREW,NEUTRAL SWITCH         | 2    |         |
| 17      | 07130-05167 | BOLT                         | 1    |         |
| 18      | 08321-0105C | WASHER,SHIFT POSITION SENSOR | 1    |         |
| 19      | 38410-93J21 | RELAY ASSY,PTT               | 1    |         |
| 20      | 38415-93J20 | HOLDER,PTT RELAY             | 1    |         |
| 21      | 33920-99L00 | UNIT,ENGINE CONTROL          | 1    |         |
| 22      | 33925-99L00 | CUSHION,ENGINE CONTROL UNIT  | 1    |         |
| 23      | 38890-99L00 | ACTUATOR ASSY,SHIFT          | 1    |         |
| 24      | 38892-98J01 | DAMPER,SHIFT ACTUATOR        | 1    |         |
| 25      | 38895-99L00 | BRACKET,SHIFT ACTUATOR       | 1    |         |
| 26      | 01550-0616C | BOLT                         | 2    |         |
| 27      | 01550-0620C | BOLT                         | 1    |         |
| 28      | 01550-06357 | BOLT                         | 1    |         |
| 29      | 01550-0655C | BOLT,THROTTLE BODY NO.3      | 1    |         |
| 30      | 38860-76F01 | RELAY ASSY                   | 2    |         |
| 31      | 38915-90J00 | HOLDER,RELAY                 | 2    |         |

FIG.331A

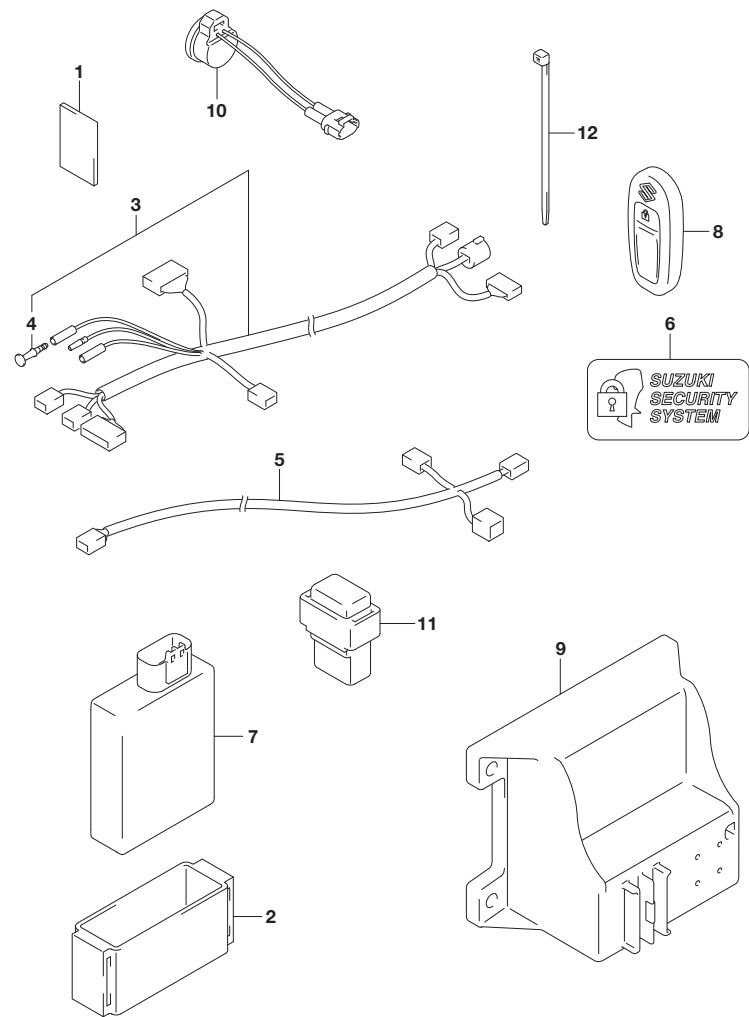

DF140BG\_E11\_021\_331A  
KEY LESS START

FIG.331A (1-D-13) KEY LESS START (E11)

| REF NO. | PART NO.    | DESCRIPTION                 | Q'TY | REMARKS     |
|---------|-------------|-----------------------------|------|-------------|
| 1       | 32851-93J00 | CUSHION, KLS CONTROLLER     | 1    |             |
| 2       | 32980-38F00 | HOLDER, KLS CONTROLLER      | 1    |             |
| 3       | 36623-96L02 | HARNESS ASSY, KLS CONT      | 1    |             |
| 4       | 36615-96300 | .TERMINAL                   | 1    |             |
| 5       | 36662-96L01 | HARNESSASSY, KLS CAN        | 1    | L:6500+2000 |
| 6       | 37117-96L00 | DECAL, KLS                  | 2    |             |
| 7-1     | 37171-96L02 | CONTROLLER ASSY, KLS 433MHZ | 1    |             |
| 7-2     | 37171-96L12 | CONTROLLER ASSY, KLS 315MHZ | 1    |             |
| 8-1     | 37172-96L01 | REMOCON ASSY, KLS 433MHZ    | 2    |             |
| 8-2     | 37172-96L10 | REMOCON ASSY, KLS 315MHZ    | 2    |             |
| 9       | 37173-96L10 | HOLDER, KLS PARTS           | 1    |             |
| 10      | 38500-93J90 | BUZZER ASSY                 | 1    |             |
| 11      | 38860-96L01 | RELAY ASSY, KLS             | 1    |             |
| 12      | 09407-14407 | CLAMP (L:145)               | 1    |             |

NOTE: USE FREQUENCY ASSIGNED ON YOUR MARKET.  
FOR DETAILS, PLEASE MAKE SURE OF SUZUKI DEALERS.

DF140BG E11  
DF140BZG E11

FIG.335A


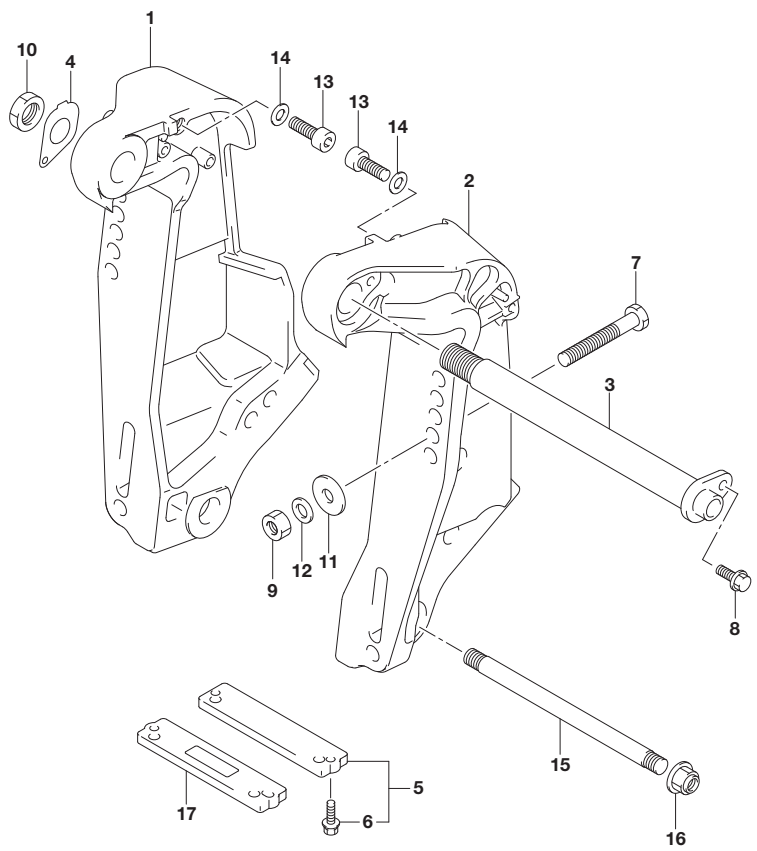


FIG.335A (1-D-14) CLAMP BRACKET


| REF NO. | PART NO.        | DESCRIPTION                 | Q'TY | REMARKS |
|---------|-----------------|-----------------------------|------|---------|
| 1-1     | 41111-92J03-YAY | BRACKET, CLAMP STBD (BLACK) | 1    |         |
| 1-2     | 41111-92J03-QTN | BRACKET, CLAMP STBD (WHITE) | 1    |         |
| 2-1     | 41121-92J21-YAY | BRACKET, CLAMP PORT (BLACK) | 1    |         |
| 2-2     | 41121-92J21-QTN | BRACKET, CLAMP PORT (WHITE) | 1    |         |
| 3       | 41130-92J30     | SHAFT, CLAMP BRACKET        | 1    |         |
| 4       | 41135-92J00     | WASHER, CLAMP BRACKET SHAFT | 1    |         |
| 5       | 55320-94900     | ZINC, PROTECTION            | 1    |         |
| 6       | 09116-06121     | .BOLT (6X25)                | 2    |         |
| 7-1     | 09100-12091     | BOLT (12X115)               | 4    |         |
| 7-2     | 09100-12090     | BOLT (12X150)               | 1    | OPT     |
| 8       | 09116-08137     | BOLT (8X22)                 | 1    |         |
| 9       | 09159-12014     | NUT                         | 4    |         |
| 10      | 09159-22006     | NUT                         | 1    |         |
| 11      | 09160-12128     | WASHER (12.5X35X3)          | 4    |         |
| 12      | 09160-12110     | WASHER (12.5X22X3)          | 4    |         |
| 13      | 09106-10065     | BOLT (10X20)                | 2    |         |
| 14      | 09160-10082     | WASHER (10.5X19X2)          | 2    |         |
| 15      | 45421-87D03     | PIN, TILT LOCK              | 1    |         |
| 16      | 09159-14020     | NUT                         | 2    |         |
| 17      | 55321-94910     | ANODE (MAGNESIUM)           | 1    | OPT     |



DF140BG\_E11\_021

| REF NO. | PART NO.        | DESCRIPTION                   | QTY | REMARKS       |
|---------|-----------------|-------------------------------|-----|---------------|
| 1       | 22511-99011     | NIPPLE, GREASE                | 4   |               |
| 2       | 36894-95201     | LEAD (CLAMP TO SWIVEL)        | 1   |               |
| 3       | 36894-87D00     | LEAD (SWIVEL TO MOUNT BRKT)   | 1   |               |
| 4-1     | 43111-92J80-YAY | BRACKET, SWIVEL (L) (BLACK)   | 1   | W/TRANSMOM(L) |
| 4-2     | 43111-92J80-QTN | BRACKET, SWIVEL (L) (WHITE)   | 1   | W/TRANSMOM(L) |
| 4-3     | 43111-92J90-YAY | BRACKET, SWIVEL (UL) (BLACK)  | 1   | W/TRANSMOM(X) |
| 4-4     | 43111-92J90-QTN | BRACKET, SWIVEL (UL) (WHITE)  | 1   | W/TRANSMOM(X) |
| 5       | 43211-93J11     | BUSH, CLAMP SHAFT SWIVEL      | 2   |               |
| 6       | 43711-97E11     | BUSH, STEERING                | 2   |               |
| 7-1     | 43750-90J61-YAY | BRACKET, STEERING (L) (BLACK) | 1   | W/TRANSMOM(L) |
| 7-2     | 43750-90J61-QTN | BRACKET, STEERING (L) (WHITE) | 1   | W/TRANSMOM(L) |
| 7-3     | 43750-90J71-YAY | BRACKET, STEERING (X) (BLACK) | 1   | W/TRANSMOM(X) |
| 7-4     | 43750-90J71-QTN | BRACKET, STEERING (X) (WHITE) | 1   | W/TRANSMOM(X) |
| 8       | 09125-05050     | SCREW (5X8)                   | 3   |               |
| 9       | 36895-87D10     | LEAD (SWIVEL TO HOUSING)      | 1   |               |
| 10      | 09160-39001     | WASHER (39.5X64X1)            | 2   |               |
| 11      | 09169-28003     | WASHER                        | 2   |               |
| 12      | 09181-39001     | SHIM (39.5X64X0.3)            | 4   |               |
| 13      | 09250-10001     | CAP (OD:14)                   | 2   |               |
| 14      | 09282-39001     | OIL SEAL (39X51X5)            | 1   |               |
| 15      | 09380-38003     | CIRCLIP                       | 1   |               |
| 16      | 09440-19028     | SPRING                        | 1   |               |
| 17      | 41220-95E13     | LEVER, TILT LOCK              | 1   |               |
| 18      | 41221-95E40     | LEVER, TILT LOCK PORT         | 1   |               |
| 19      | 41224-95E01     | BUSH, TILT STOPPER ROD        | 2   |               |
| 20      | 41225-94401     | RUBBER, TILT LOCK LEVER       | 1   |               |
| 21      | 41228-90J00     | SPRING, TILT LOCK LEVER       | 1   |               |
| 22      | 41230-95E00     | LINK, TILT LOCK LEVER         | 1   |               |
| 23      | 41233-95E10     | BRACKET, TILT LOCK SPRING     | 1   |               |
| 24      | 09125-06063     | SCREW (6X10)                  | 1   |               |
| 25      | 09140-10032     | NUT                           | 1   |               |
| 26      | 09160-06082     | WASHER (6.5X13X1.0)           | 1   |               |
| 27      | 09204-01006     | PIN                           | 1   |               |
| 28      | 09125-06063     | SCREW (6X10)                  | 1   |               |
| 29      | 09125-06063     | SCREW (6X10)                  | 1   |               |

FIG.337A

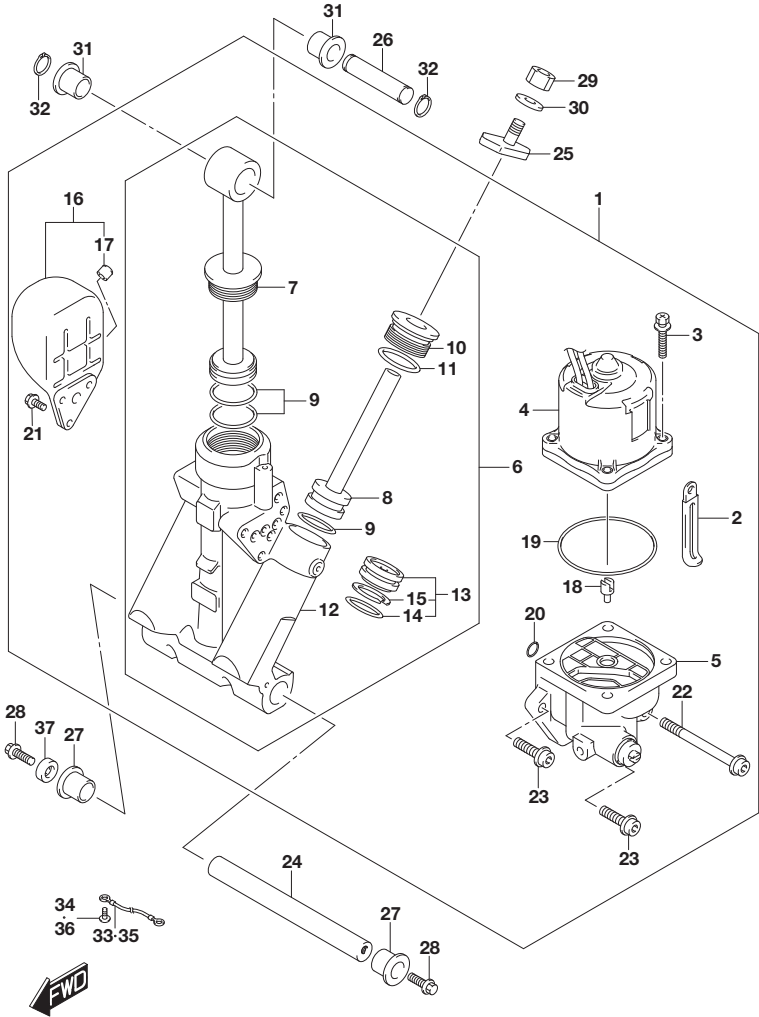

DF140BG\_E11\_021\_337A  
TRIM CYLINDER

FIG.337A (1-E-2) TRIM CYLINDER (E11)

| REF NO. | PART NO.    | DESCRIPTION                | Q'TY | REMARKS |
|---------|-------------|----------------------------|------|---------|
| 1       | 48000-96J15 | TRIM ASSY, POWER WITH TILT | 1    |         |
| 2       | 29404-93J01 | ..CLAMP                    | 1    |         |
| 3       | 31281-92J10 | ..BOLT                     | 4    |         |
| 4       | 38100-96J12 | ..MOTOR ASSY, PTT          | 1    |         |
| 5       | 48502-96J05 | ..PUMP ASSY                | 1    |         |
| 6       | 48503-96J05 | ..MANIFOLD SUB ASSY        | 1    |         |
| 7       | 48401-96J02 | ..PISTON ASSY              | 1    |         |
| 8       | 48601-94900 | ..PISTON / RAM ASSY        | 2    |         |
| 9       | 48627-95E00 | ..O RING SET               | 3    |         |
| 10      | 48630-96J04 | ..HEAD, TRIM CYLINDER      | 2    |         |
| 11      | 48633-94900 | ..O RING SET (2PCS)        | 2    |         |
| 12      | 48641-96J04 | ..MANIFOLD, PTT            | 1    |         |
| 13      | 48650-94900 | ..PISTON, FREE             | 1    |         |
| 14      | 48405-93J00 | ...O RING SET              | 1    |         |
| 15      | 48615-97E00 | ...RING SET, PISTON        | 1    |         |
| 16      | 48570-95E01 | ..RESERVOIR                | 1    |         |
| 17      | 48572-95E00 | ..CAP                      | 1    |         |
| 18      | 48583-95E00 | ..JOINT, DRIVE             | 1    |         |
| 19      | 48585-95E00 | ..O RING                   | 1    |         |
| 20      | 48588-94900 | ..O RING SET (6PCS)        | 1    |         |
| 21      | 48861-92J01 | ..BOLT, RESERVOIR          | 3    |         |
| 22      | 48862-92J20 | ..BOLT, PUMP NO.1          | 1    |         |
| 23      | 48862-92J30 | ..BOLT, PUMP NO.2          | 2    |         |
| 24      | 48121-92J00 | SHAFT, TILT CYLINDER LOWER | 1    |         |
| 25      | 48311-96J20 | PAD, TRIM CYLINDER RAM     | 2    |         |
| 26      | 48321-87D03 | SHAFT, TILT CYLINDER UPPER | 1    |         |
| 27      | 48326-95E00 | BUSH, TILT CYLINDER LOWER  | 2    |         |

DF140BG\_E11\_021



FIG.337A

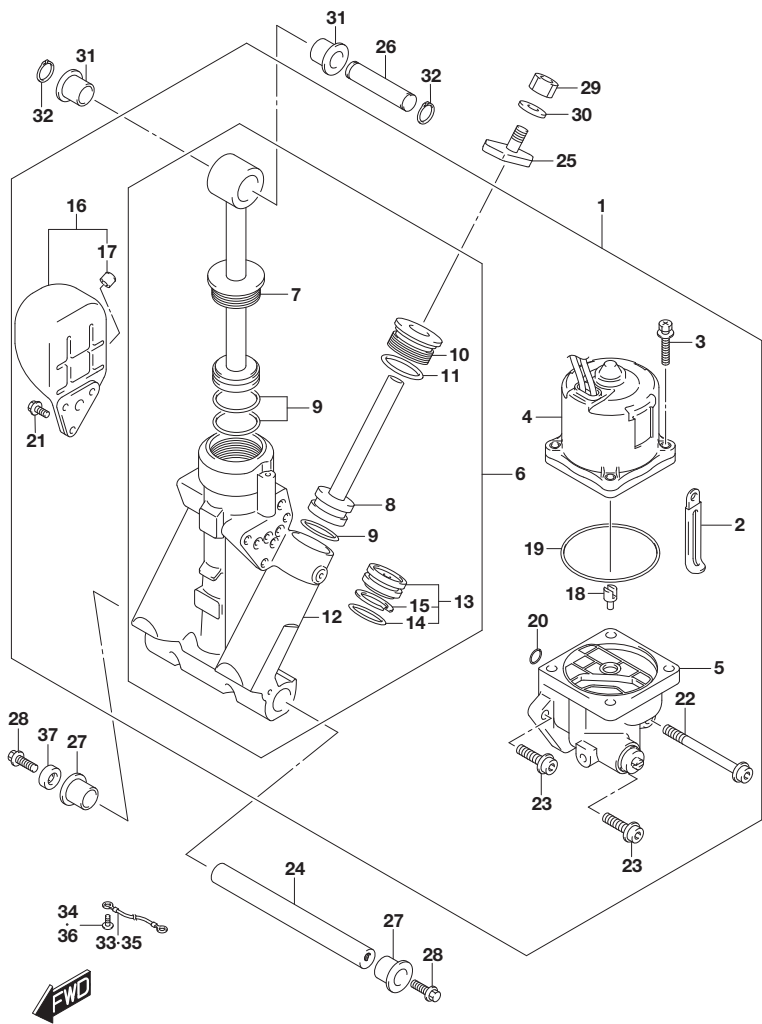


FIG.337A (1-E-3) TRIM CYLINDER (E11)

| REF NO. | PART NO.    | DESCRIPTION                | Q'TY | REMARKS |
|---------|-------------|----------------------------|------|---------|
| 28      | 09116-10179 | BOLT (10X35)               | 2    |         |
| 29      | 09140-10031 | NUT                        | 2    |         |
| 30      | 09162-10005 | LOCK WASHER                | 2    |         |
| 31      | 09306-17001 | BUSH                       | 2    |         |
| 32      | 09380-17009 | CIRCLIP                    | 2    |         |
| 33      | 36894-87D00 | LEAD, PTT TO ANODE (L:165) | 1    |         |
| 34      | 09125-06063 | SCREW (6X10)               | 1    |         |
| 35      | 36895-87D10 | LEAD, PTT TO ANODE (L:310) | 1    |         |
| 36      | 09125-05050 | SCREW (5X8)                | 1    |         |
| 37      | 55321-87J11 | ANODE (MAGNESIUM)          | 1    | OPT     |

DF140BG E11  
DF140BZG E11

FIG.337B

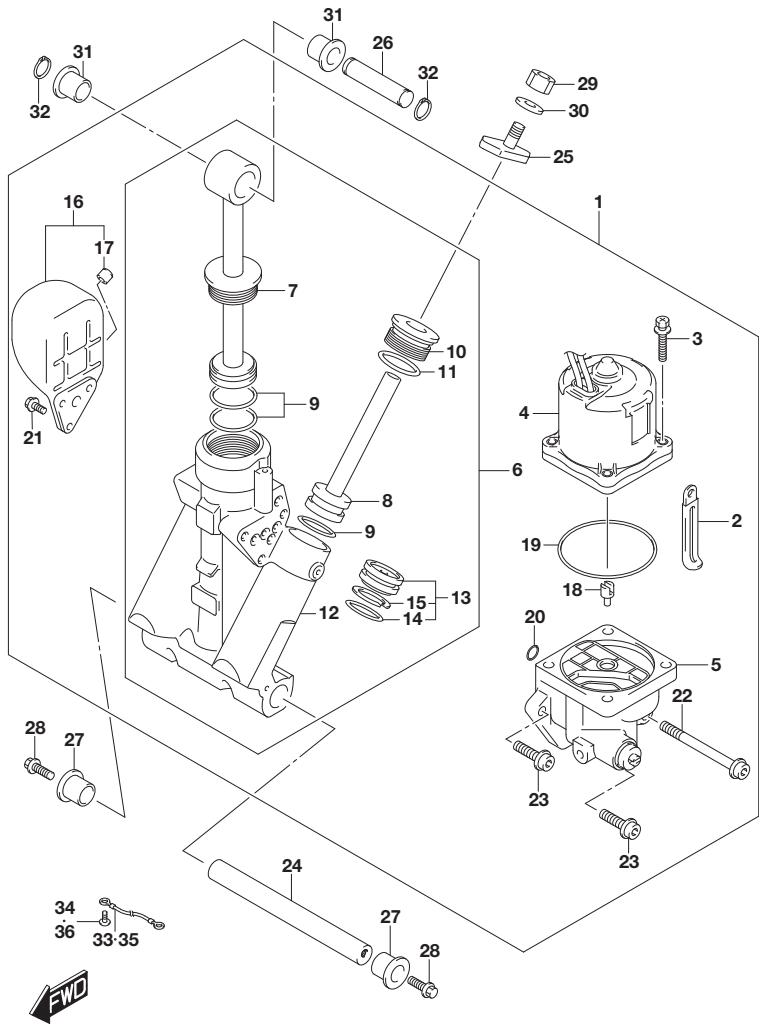


FIG.337B (1-E-4) TRIM CYLINDER (E40)

| REF NO. | PART NO.    | DESCRIPTION                | Q'TY | REMARKS |
|---------|-------------|----------------------------|------|---------|
| 1       | 48000-96J15 | TRIM ASSY, POWER WITH TILT | 1    |         |
| 2       | 29404-93J01 | ..CLAMP                    | 1    |         |
| 3       | 31281-92J10 | ..BOLT                     | 4    |         |
| 4       | 38100-96J12 | ..MOTOR ASSY, PTT          | 1    |         |
| 5       | 48502-96J05 | ..PUMP ASSY                | 1    |         |
| 6       | 48503-96J05 | ..MANIFOLD SUB ASSY        | 1    |         |
| 7       | 48401-96J02 | ..PISTON ASSY              | 1    |         |
| 8       | 48601-94900 | ..PISTON / RAM ASSY        | 2    |         |
| 9       | 48627-95E00 | ..O RING SET               | 3    |         |
| 10      | 48630-96J04 | ..HEAD, TRIM CYLINDER      | 2    |         |
| 11      | 48633-94900 | ..O RING SET (2PCS)        | 2    |         |
| 12      | 48641-96J04 | ..MANIFOLD, PTT            | 1    |         |
| 13      | 48650-94900 | ..PISTON, FREE             | 1    |         |
| 14      | 48405-93J00 | ...O RING SET              | 1    |         |
| 15      | 48615-97E00 | ...RING SET, PISTON        | 1    |         |
| 16      | 48570-95E01 | ..RESERVOIR                | 1    |         |
| 17      | 48572-95E00 | ..CAP                      | 1    |         |
| 18      | 48583-95E00 | ..JOINT, DRIVE             | 1    |         |
| 19      | 48585-95E00 | ..O RING                   | 1    |         |
| 20      | 48588-94900 | ..O RING SET (6PCS)        | 1    |         |
| 21      | 48861-92J01 | ..BOLT, RESERVOIR          | 3    |         |
| 22      | 48862-92J20 | ..BOLT, PUMP NO.1          | 1    |         |
| 23      | 48862-92J30 | ..BOLT, PUMP NO.2          | 2    |         |
| 24      | 48121-92J00 | SHAFT, TILT CYLINDER LOWER | 1    |         |
| 25      | 48311-96J20 | PAD, TRIM CYLINDER RAM     | 2    |         |
| 26      | 48321-87D03 | SHAFT, TILT CYLINDER UPPER | 1    |         |
| 27      | 48326-95E00 | BUSH, TILT CYLINDER LOWER  | 2    |         |
| 28      | 09116-10179 | BOLT (10X35)               | 2    |         |
| 29      | 09140-10031 | NUT                        | 2    |         |

FIG.337B

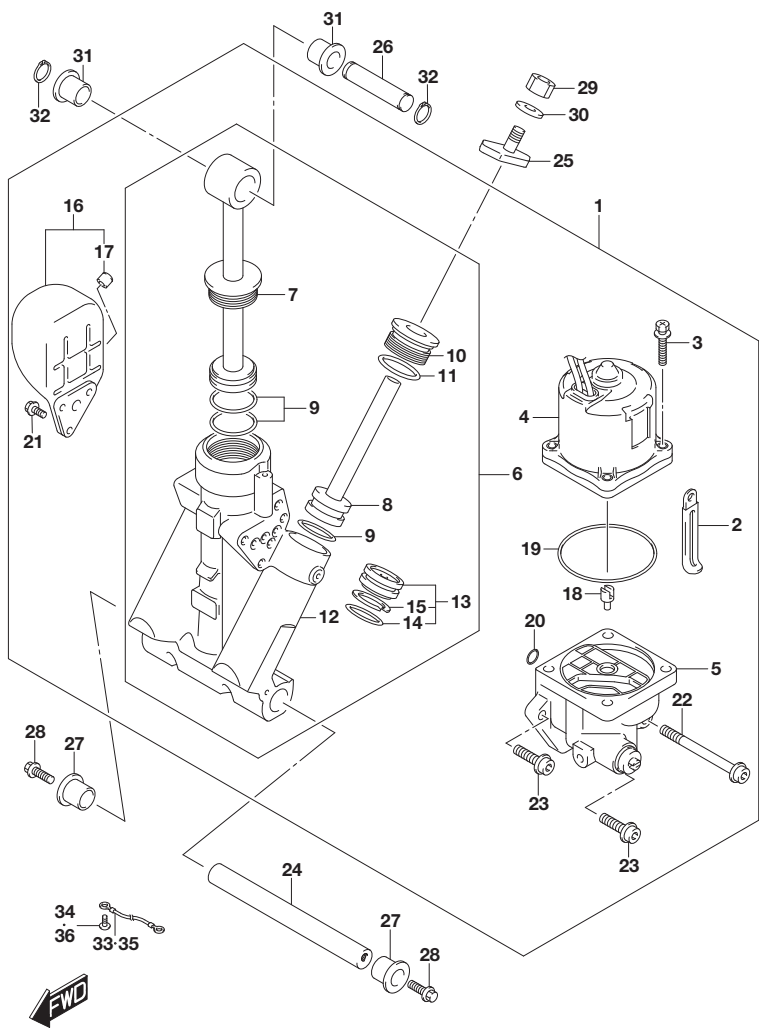


FIG.337B (1-E-5) TRIM CYLINDER (E40)

| REF NO. | PART NO.    | DESCRIPTION                | Q'TY | REMARKS |
|---------|-------------|----------------------------|------|---------|
| 30      | 09162-10005 | LOCK WASHER                | 2    |         |
| 31      | 09306-17001 | BUSH                       | 2    |         |
| 32      | 09380-17009 | CIRCLIP                    | 2    |         |
| 33      | 36894-87D00 | LEAD, PTT TO ANODE (L:165) | 1    |         |
| 34      | 09125-06063 | SCREW (6X10)               | 1    |         |
| 35      | 36895-87D10 | LEAD, PTT TO ANODE (L:310) | 1    |         |
| 36      | 09125-05050 | SCREW (5X8)                | 1    |         |

DF140BG E40  
DF140BZG E40

**FIG.340A (1-E-6) PTT MOTOR**


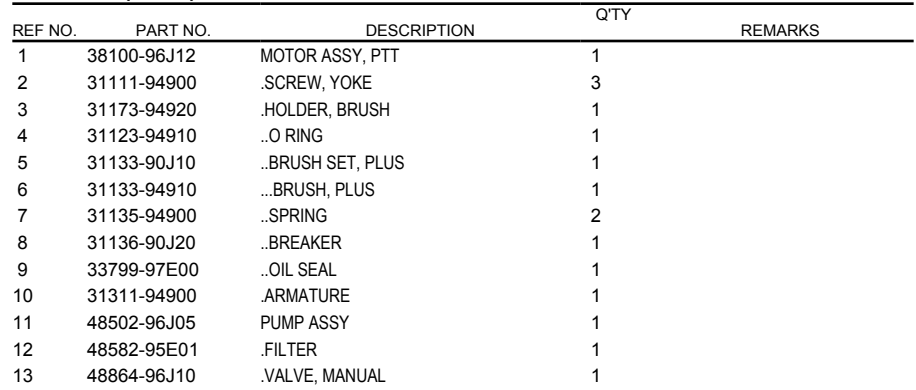


FIG.401A

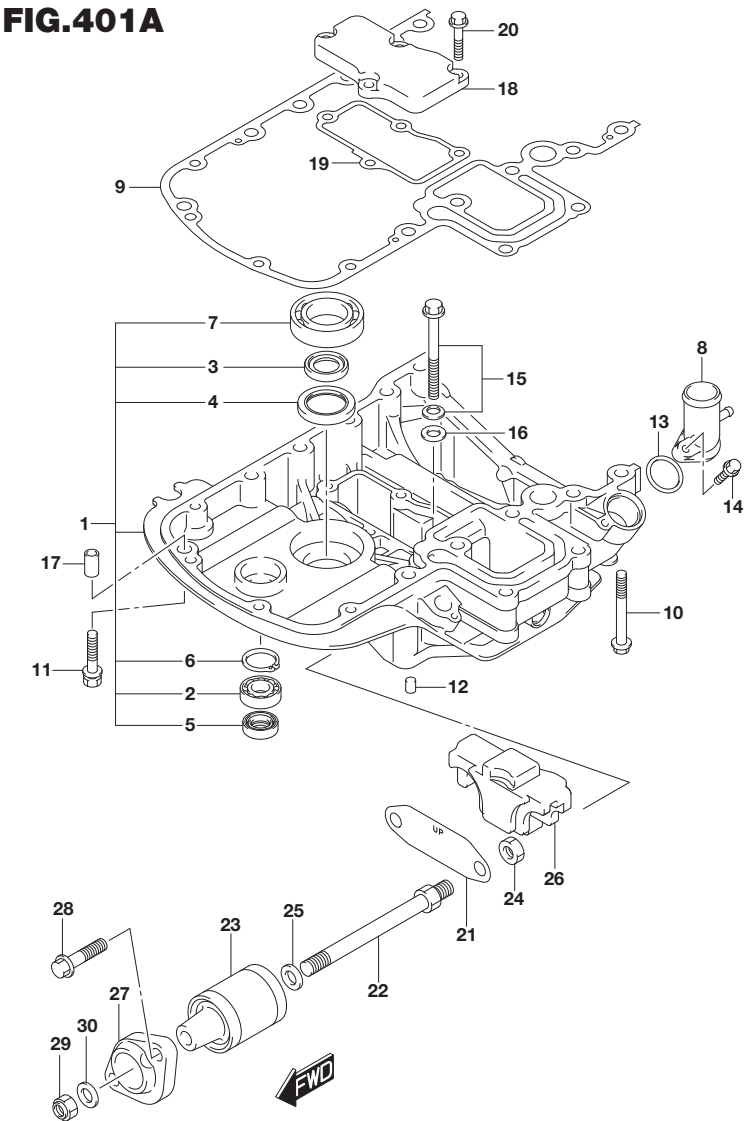

DF140BG\_E11\_021\_401A  
ENGINE HOLDER

FIG.401A (1-E-7) ENGINE HOLDER

| REF NO. | PART NO.        | DESCRIPTION                | Q'TY | REMARKS |
|---------|-----------------|----------------------------|------|---------|
| 1-1     | 51110-99810-YAY | HOLDER SET, ENGINE (BLACK) | 1    | FOR YAY |
| 1-2     | 51110-99810-Y5S | HOLDER SET, ENGINE (WHITE) | 1    | FOR QTN |
| 2       | 09262-17019     | .BEARING (17X35X8)         | 1    |         |
| 3       | 09282-24003     | .OIL SEAL (24X36X6)        | 2    |         |
| 4       | 09283-32044     | .OIL SEAL (32X47X6)        | 1    |         |
| 5       | 09289-18001     | .OIL SEAL (18X30X8)        | 1    |         |
| 6       | 08331-41359     | .CIRCLIP                   | 1    |         |
| 7       | 09262-35069     | .BEARING (35X62X16)        | 1    |         |
| 8       | 51115-90J00     | UNION, WATER RETURN        | 1    |         |
| 9       | 51211-90J30     | GASKET, ENGINE HOLDER      | 1    |         |
| 10      | 09116-08160     | BOLT (8X70)                | 4    |         |
| 11      | 09116-08178     | BOLT (8X40)                | 4    |         |
| 12      | 09206-08001     | PIN (8X11)                 | 2    |         |
| 13      | 09280-26006     | O RING (D:3.1,ID:26.4)     | 1    |         |
| 14      | 01550-0625C     | BOLT                       | 1    |         |
| 15      | 29117-93J10     | BOLT (8X45)                | 1    |         |
| 16      | 09160-08059     | WASHER (8.5X18X1.6)        | 1    |         |
| 17      | 04211-11129     | PIN                        | 3    |         |
| 18      | 51122-90J00     | COVER, MOUNT CASE          | 1    |         |
| 19      | 51123-90J01     | GASKET, MOUNT CASE COVER   | 1    |         |
| 20      | 01550-0825A     | BOLT                       | 4    |         |
| 21      | 54123-90J01     | PLATE, UPPER MOUNT         | 1    |         |
| 22      | 54112-90J21     | BOLT, UPPER MOUNT          | 2    |         |
| 23      | 54130-90J40     | MOUNT, UPPER               | 2    |         |
| 24      | 09159-12014     | NUT                        | 2    |         |
| 25      | 54114-90J10     | WASHER, UPPER MOUNT        | 2    |         |
| 26      | 54125-90J11     | MOUNT, UPPER THRUST        | 1    |         |
| 27      | 54148-90J11     | COVER, UPPER MOUNT         | 2    |         |
| 28      | 09116-10181     | BOLT (10X44)               | 4    |         |
| 29      | 09159-12014     | NUT                        | 2    |         |
| 30      | 09160-12110     | WASHER (12.5X22X3)         | 2    |         |

DF140BG\_E11\_021

FIG.405A


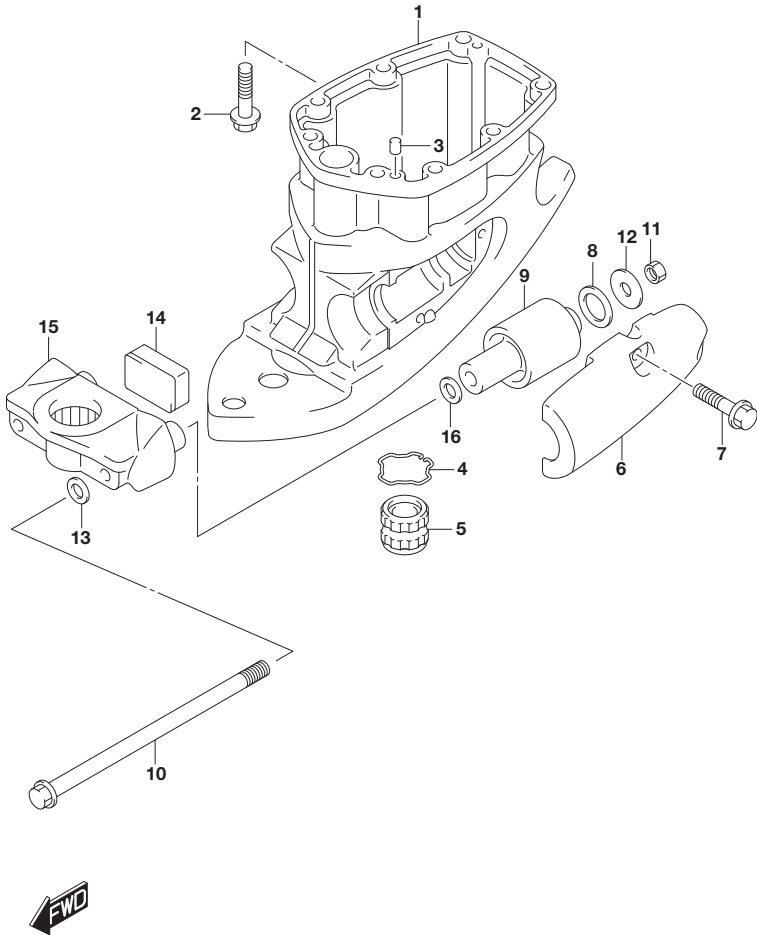


FIG.405A (1-E-8) DRIVE SHAFT HOUSING

| REF NO. | PART NO.        | DESCRIPTION                   | Q'TY | REMARKS      |
|---------|-----------------|-------------------------------|------|--------------|
| 1-1     | 52111-90J02-YAY | HOUSING, DRIVE SHAFT (BLACK)  | 1    | W/TRANSOM(L) |
| 1-2     | 52111-90J02-QTN | HOUSING, DRIVE SHAFT (WHITE)  | 1    | W/TRANSOM(L) |
| 1-3     | 52111-90J12-YAY | HOUSING, DRIVE SHAFT (BLACK)  | 1    | W/TRANSOM(X) |
| 1-4     | 52111-90J12-QTN | HOUSING, DRIVE SHAFT (WHITE)  | 1    | W/TRANSOM(X) |
| 2       | 09116-10181     | BOLT (10X44)                  | 8    |              |
| 3       | 09202-08006     | PIN (8X12)                    | 2    |              |
| 4       | 09387-45001     | RING                          | 1    | W/TRANSOM(X) |
| 5       | 57130-92J01     | BUSH, DRIVE SHAFT             | 1    | W/TRANSOM(X) |
| 6-1     | 54221-90J02-YAY | COVER, LOWER MOUNT (BLACK)    | 2    |              |
| 6-2     | 54221-90J02-QTN | COVER, LOWER MOUNT (WHITE)    | 2    |              |
| 7       | 09116-10181     | BOLT (10X44)                  | 6    |              |
| 8       | 54121-87D01     | DAMPER, REVERSE STOPPER LOWER | 2    |              |
| 9       | 54160-90J20     | MOUNT, LOWER                  | 2    |              |
| 10      | 54166-90J11     | BOLT (12X231)                 | 2    |              |
| 11      | 09159-12014     | NUT                           | 2    |              |
| 12      | 09160-12132     | WASHER (12.1X40X3)            | 2    |              |
| 13      | 54114-90J10     | WASHER, LOWER MOUNT           | 2    |              |
| 14      | 54151-90J00     | MOUNT, LOWER THRUST           | 1    |              |
| 15-1    | 54211-90J01-YAY | BRACKET, LOWER MOUNT (BLACK)  | 1    |              |
| 15-2    | 54211-90J01-QTN | BRACKET, LOWER MOUNT (WHITE)  | 1    |              |
| 16      | 09160-12133     | WASHER (12.5X30X2.5)          | 2    |              |

FIG.407A

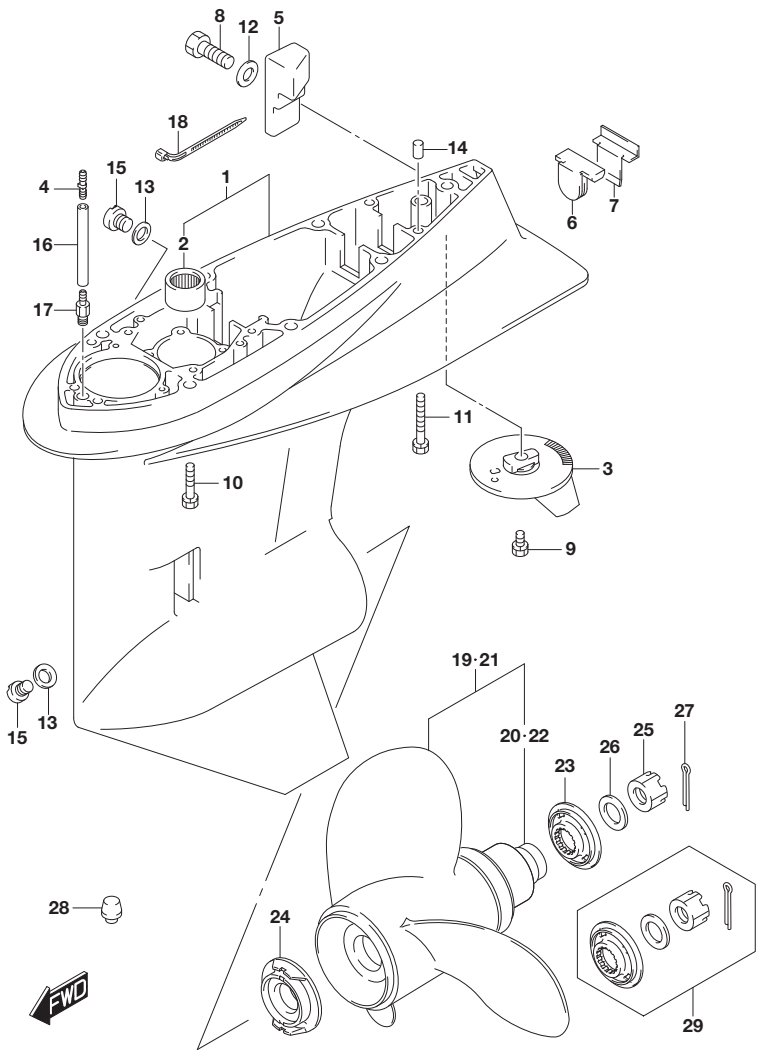

DF140BG\_E11\_021\_407A  
GEAR CASE

FIG.407A (1-E-9) GEAR CASE (DF140BG E11)

| REF NO. | PART NO.        | DESCRIPTION             | Q'TY | REMARKS                    |
|---------|-----------------|-------------------------|------|----------------------------|
| 1-1     | 55110-90J16-YAY | CASE, GEAR (BLACK)      | 1    |                            |
| 1-2     | 55110-90J16-QTN | CASE, GEAR (WHITE)      | 1    |                            |
| 2       | 09263-28016     | .BEARING (28.6X38X31.8) | 1    |                            |
| 3       | 55125-90J01     | TAB, TRIM               | 1    |                            |
| 4       | 55127-87D00     | UNION                   | 1    |                            |
| 5       | 55321-90J01     | ANODE, GEAR CASE        | 1    |                            |
| 6       | 55332-87D12     | RUBBER, EXHAUST SEAL    | 1    |                            |
| 7       | 55333-87D10     | PLATE, EXHAUST SEAL     | 1    |                            |
| 8       | 09100-06131     | BOLT (6X12)             | 1    |                            |
| 9       | 09116-08137     | BOLT (8X22)             | 1    |                            |
| 10      | 09116-10150     | BOLT (10X55)            | 6    |                            |
| 11      | 09117-10039     | BOLT (10X80)            | 1    |                            |
| 12      | 09160-06085     | WASHER (6.5X15X1)       | 1    |                            |
| 13      | 09168-10022     | GASKET (10X17X1.5)      | 2    |                            |
| 14      | 09202-08006     | PIN (8X12)              | 2    |                            |
| 15      | 09248-10008     | PLUG (10X7.5)           | 2    |                            |
| 16-1    | 09355-40805-600 | HOSE (4X8X600)          | 1    | W/TRANSOM(L)<br>L:600->50  |
| 16-2    | 09355-40805-600 | HOSE (4X8X600)          | 1    | W/TRANSOM(X)<br>L:600->100 |
| 17      | 09362-09008     | UNION                   | 1    |                            |
| 18      | 09407-10404     | CLAMP (L:100)           | 2    |                            |
| 19-1    | 58100-90JA0-019 | PROPELLER (3X14X17)     | 1    |                            |
| 19-2    | 58100-90JB0-019 | PROPELLER (3X14X19)     | 1    |                            |
| 19-3    | 58100-90JC0-019 | PROPELLER (3X14X21)     | 1    |                            |
| 19-4    | 58100-90JD0-019 | PROPELLER (3X14X23)     | 1    |                            |
| 19-5    | 58100-90JE0-019 | PROPELLER (3X13-1/2X15) | 1    |                            |
| 20      | 58105-90J00     | .BUSH                   | 1    |                            |

DF140BG\_E11\_021

FIG.407A

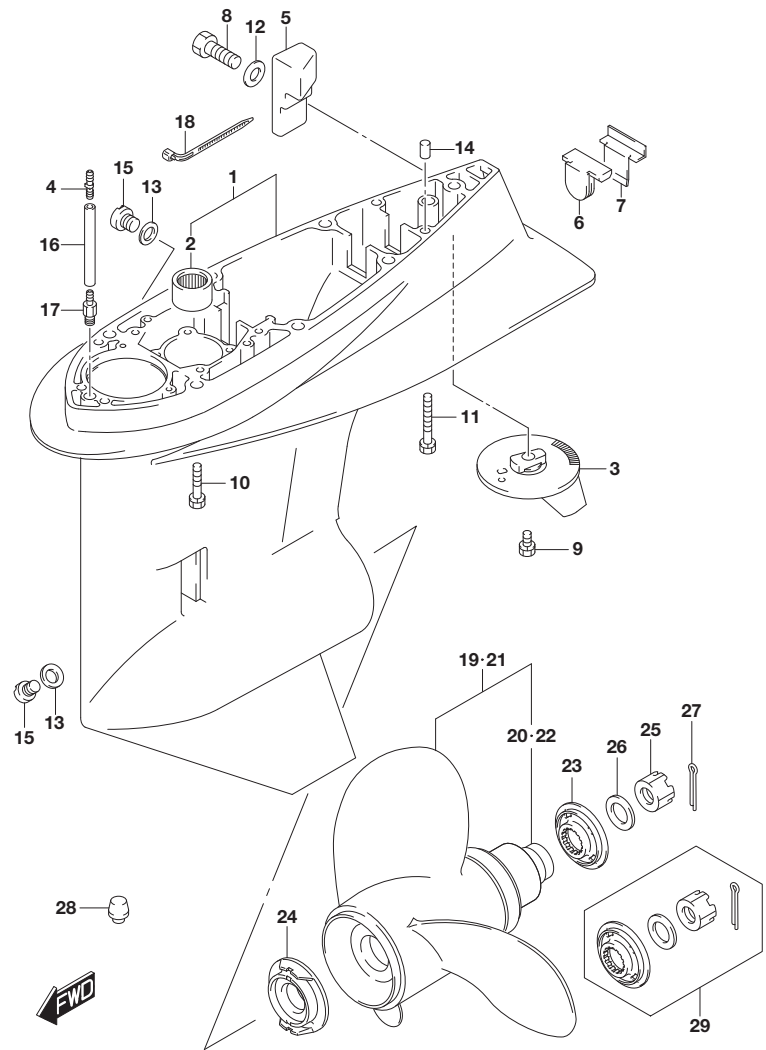



FIG.407A (1-E-10) GEAR CASE (DF140BG E11)

| REF NO. | PART NO.    | DESCRIPTION             | Q'TY |     | REMARKS         |
|---------|-------------|-------------------------|------|-----|-----------------|
| 21-1    | 58200-92J40 | PROPELLER(3X13-7/8X15)  | 1    | OPT |                 |
| 21-2    | 58200-92J50 | PROPELLER (3X13-7/8X17) | 1    | OPT |                 |
| 21-3    | 58200-92J60 | PROPELLER (3X13-7/8X19) | 1    | OPT |                 |
| 21-4    | 58200-92J70 | PROPELLER (3X13-7/8X21) | 1    | OPT |                 |
| 21-5    | 58200-92J80 | PROPELLER (3X13-7/8X23) | 1    | OPT |                 |
| 21-6    | 58200-92J90 | PROPELLER (3X13-7/8X25) | 1    | OPT |                 |
| 22      | 58105-90J00 | .BUSH, PROPELLER        | 1    | OPT |                 |
| 23      | 57633-90J02 | SPACER, PROPELLER NUT   | 1    |     |                 |
| 24      | 57635-92J01 | STOPPER, PROPELLER BUSH | 1    |     |                 |
| 25      | 09141-18005 | NUT                     | 1    |     |                 |
| 26      | 09160-18028 | WASHER (18.5X31X1)      | 1    |     |                 |
| 27      | 09204-03003 | PIN                     | 1    |     |                 |
| 28      | 55116-87E00 | PLUG                    | 1    | OPT |                 |
| 29      | 57630-90J00 | KIT, PROPELLER NUT      | 1    | OPT |                 |
| 30      | 25700-92J00 | SEALING KIT, GEAR CASE  | 1    | OPT |                 |
|         |             |                         |      |     | NOT ILLUSTRATED |

DF140BG E11



FIG.407B

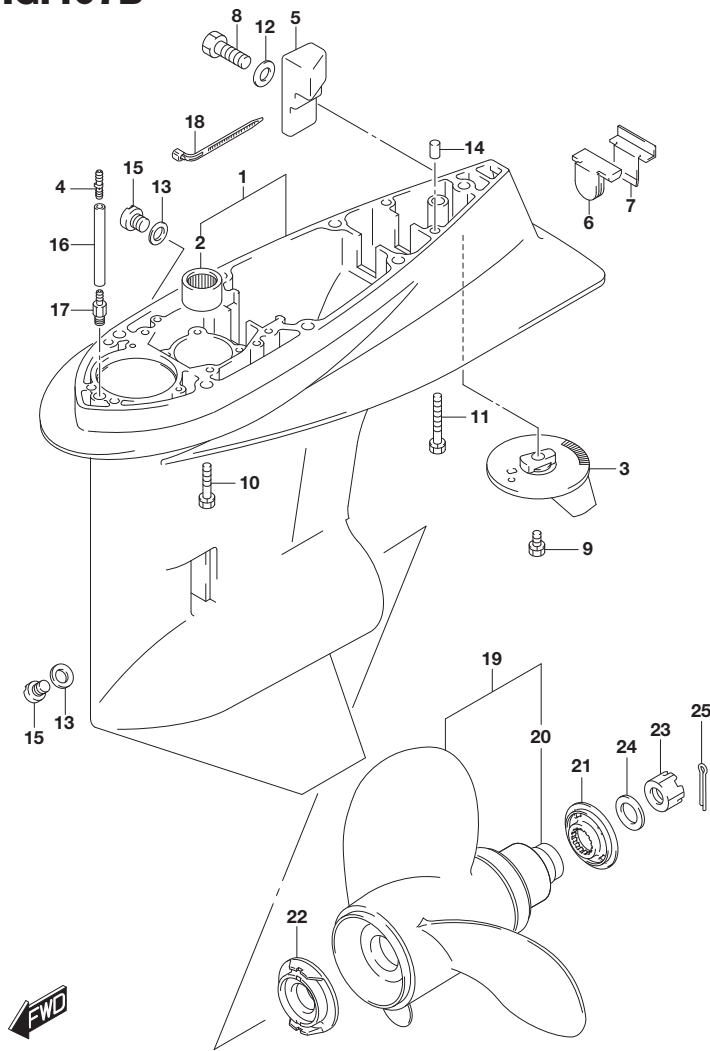


DF140BG\_E11\_021\_407B  
GEAR CASE

FIG.407B (1-E-11) GEAR CASE (DF140BG E40)

| REF NO. | PART NO.        | DESCRIPTION             | Q'TY | REMARKS                    |
|---------|-----------------|-------------------------|------|----------------------------|
| 1-1     | 55110-90J16-YAY | CASE, GEAR (BLACK)      | 1    |                            |
| 1-2     | 55110-90J16-QTN | CASE, GEAR (WHITE)      | 1    |                            |
| 2       | 09263-28016     | .BEARING (28.6X38X31.8) | 1    |                            |
| 3       | 55125-90J01     | TAB, TRIM               | 1    |                            |
| 4       | 55127-87D00     | UNION                   | 1    |                            |
| 5       | 55321-90J01     | ANODE, GEAR CASE        | 1    |                            |
| 6       | 55332-87D12     | RUBBER, EXHAUST SEAL    | 1    |                            |
| 7       | 55333-87D10     | PLATE, EXHAUST SEAL     | 1    |                            |
| 8       | 09100-06131     | BOLT (6X12)             | 1    |                            |
| 9       | 09116-08137     | BOLT (8X22)             | 1    |                            |
| 10      | 09116-10150     | BOLT (10X55)            | 6    |                            |
| 11      | 09117-10039     | BOLT (10X80)            | 1    |                            |
| 12      | 09160-06085     | WASHER (6.5X15X1)       | 1    |                            |
| 13      | 09168-10022     | GASKET (10X17X1.5)      | 2    |                            |
| 14      | 09202-08006     | PIN (8X12)              | 2    |                            |
| 15      | 09248-10008     | PLUG (10X7.5)           | 2    |                            |
| 16-1    | 09355-40805-600 | HOSE (4X8X600)          | 1    | W/TRANSOM(L)<br>L:600->50  |
| 16-2    | 09355-40805-600 | HOSE (4X8X600)          | 1    | W/TRANSOM(X)<br>L:600->100 |
| 17      | 09362-09008     | UNION                   | 1    |                            |
| 18      | 09407-10404     | CLAMP (L:100)           | 2    |                            |
| 19-1    | 58100-90JA0-019 | PROPELLER (3X14X17)     | 1    |                            |
| 19-2    | 58100-90JB0-019 | PROPELLER (3X14X19)     | 1    |                            |
| 19-3    | 58100-90JC0-019 | PROPELLER (3X14X21)     | 1    |                            |
| 19-4    | 58100-90JD0-019 | PROPELLER (3X14X23)     | 1    |                            |
| 19-5    | 58100-90JE0-019 | PROPELLER (3X13-1/2X15) | 1    |                            |
| 20      | 58105-90J00     | .BUSH                   | 1    |                            |

DF140BG\_E11\_021

FIG.407B

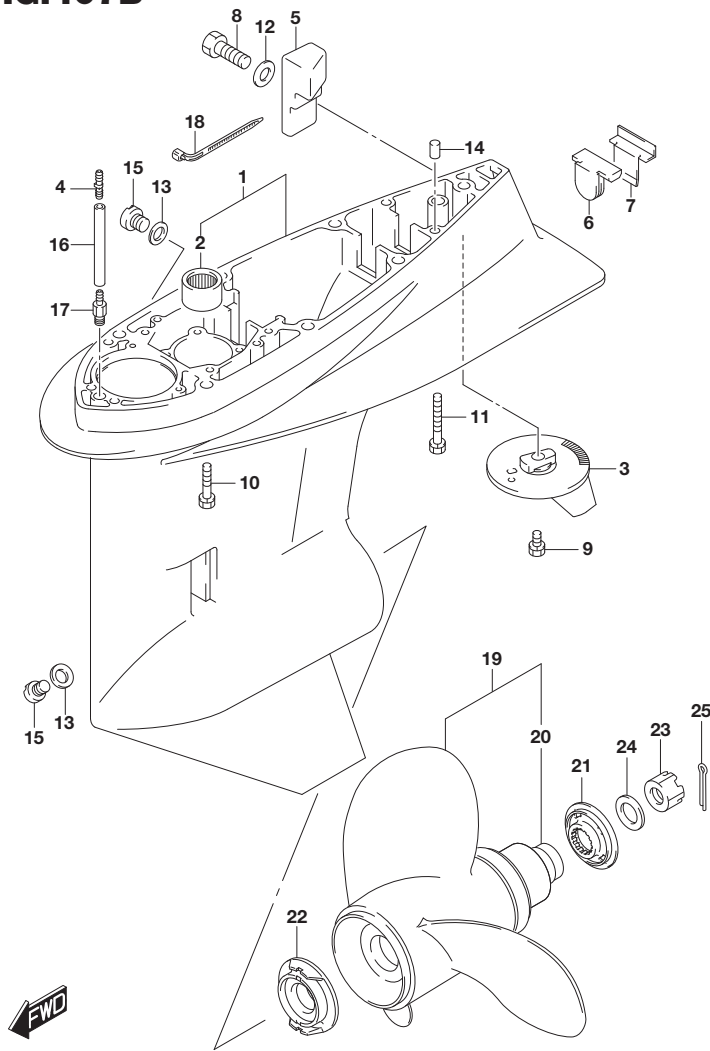

DF140BG\_E11\_021\_407B  
GEAR CASE


FIG.407B (1-E-12) GEAR CASE (DF140BG E40)

| REF NO. | PART NO.    | DESCRIPTION             | Q'TY | REMARKS                |
|---------|-------------|-------------------------|------|------------------------|
| 21      | 57633-90J02 | SPACER, PROPELLER NUT   | 1    |                        |
| 22      | 57635-92J01 | STOPPER, PROPELLER BUSH | 1    |                        |
| 23      | 09141-18005 | NUT                     | 1    |                        |
| 24      | 09160-18028 | WASHER (18.5X31X1)      | 1    |                        |
| 25      | 09204-03003 | PIN                     | 1    |                        |
| 26      | 25700-92J00 | SEALING KIT, GEAR CASE  | 1    | OPT<br>NOT ILLUSTRATED |

DF140BG E40

DF140BG\_E11\_021

FIG.407C

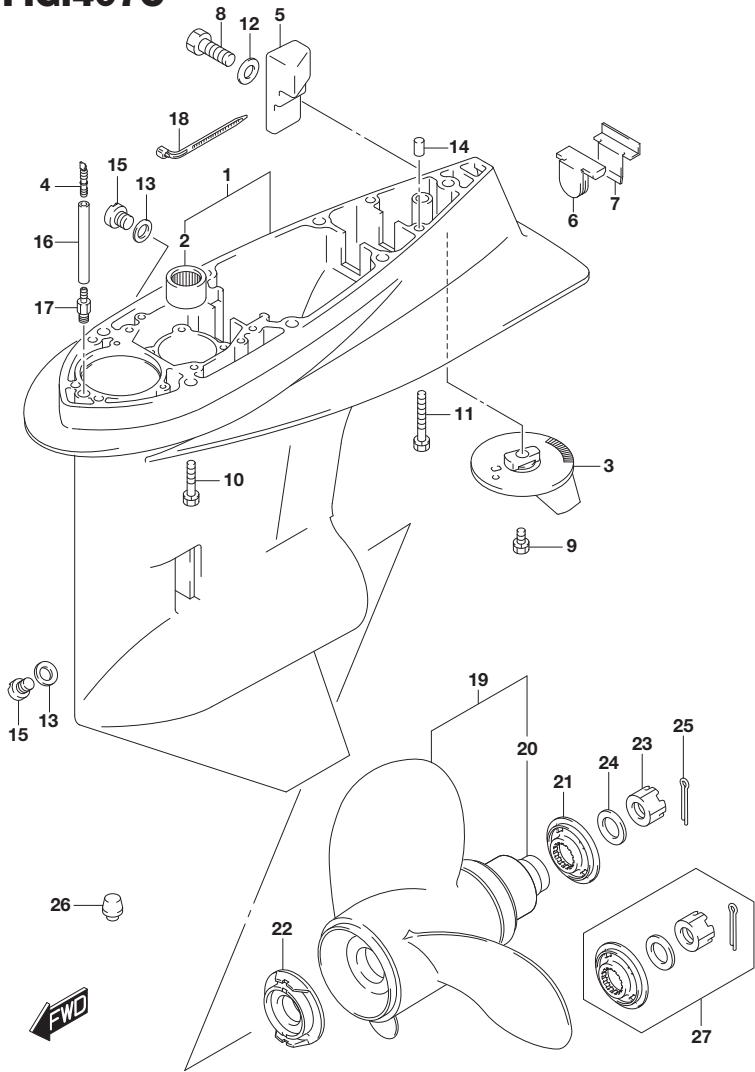


DF140BG\_E11\_021\_407C  
GEAR CASE

FIG.407C (1-E-13) GEAR CASE (DF140BZG E11)

| REF NO. | PART NO.        | DESCRIPTION             | Q'TY | REMARKS                    |
|---------|-----------------|-------------------------|------|----------------------------|
| 1-1     | 55110-92J01-YAY | CASE, GEAR (BLACK)      | 1    |                            |
| 1-2     | 55110-92J01-QTN | CASE, GEAR (WHITE)      | 1    |                            |
| 2       | 09263-28016     | .BEARING (28.6X38X31.8) | 1    |                            |
| 3-1     | 55125-92J00-YAY | TAB, TRIM (BLACK)       | 1    |                            |
| 3-2     | 55125-92J00-QTN | TAB, TRIM (WHITE)       | 1    |                            |
| 4       | 55127-87D00     | UNION                   | 1    |                            |
| 5       | 55321-90J01     | ANODE, GEAR CASE        | 1    |                            |
| 6       | 55332-87D12     | RUBBER, EXHAUST SEAL    | 1    |                            |
| 7       | 55333-87D10     | PLATE, EXHAUST SEAL     | 1    |                            |
| 8       | 09100-06131     | BOLT (6X12)             | 1    |                            |
| 9       | 09116-08137     | BOLT (8X22)             | 1    |                            |
| 10      | 09116-10150     | BOLT (10X55)            | 6    |                            |
| 11      | 09117-10039     | BOLT (10X80)            | 1    |                            |
| 12      | 09160-06085     | WASHER (6.5X15X1)       | 1    |                            |
| 13      | 09168-10022     | GASKET (10X17X1.5)      | 2    |                            |
| 14      | 09202-08006     | PIN (8X12)              | 2    |                            |
| 15      | 09248-10008     | PLUG (10X7.5)           | 2    |                            |
| 16-1    | 09355-40805-600 | HOSE (4X8X600)          | 1    | W/TRANSOM(L)<br>L:600->50  |
| 16-2    | 09355-40805-600 | HOSE (4X8X600)          | 1    | W/TRANSOM(X)<br>L:600->100 |
| 17      | 09362-09008     | UNION                   | 1    |                            |
| 18      | 09407-10404     | CLAMP (L:100)           | 2    |                            |
| 19-1    | 58200-92JA0     | PROPELLER (3X13-7/8X17) | 1    | OPT                        |
| 19-2    | 58200-92JB0     | PROPELLER (3X13-7/8X19) | 1    | OPT                        |
| 19-3    | 58200-92JC0     | PROPELLER (3X13-7/8X21) | 1    | OPT                        |
| 19-4    | 58200-92JD0     | PROPELLER(3X13-7/8X23)  | 1    | OPT                        |
| 20      | 58105-90J00     | .BUSH                   | 1    | OPT                        |

DF140BG\_E11\_021

FIG.407C

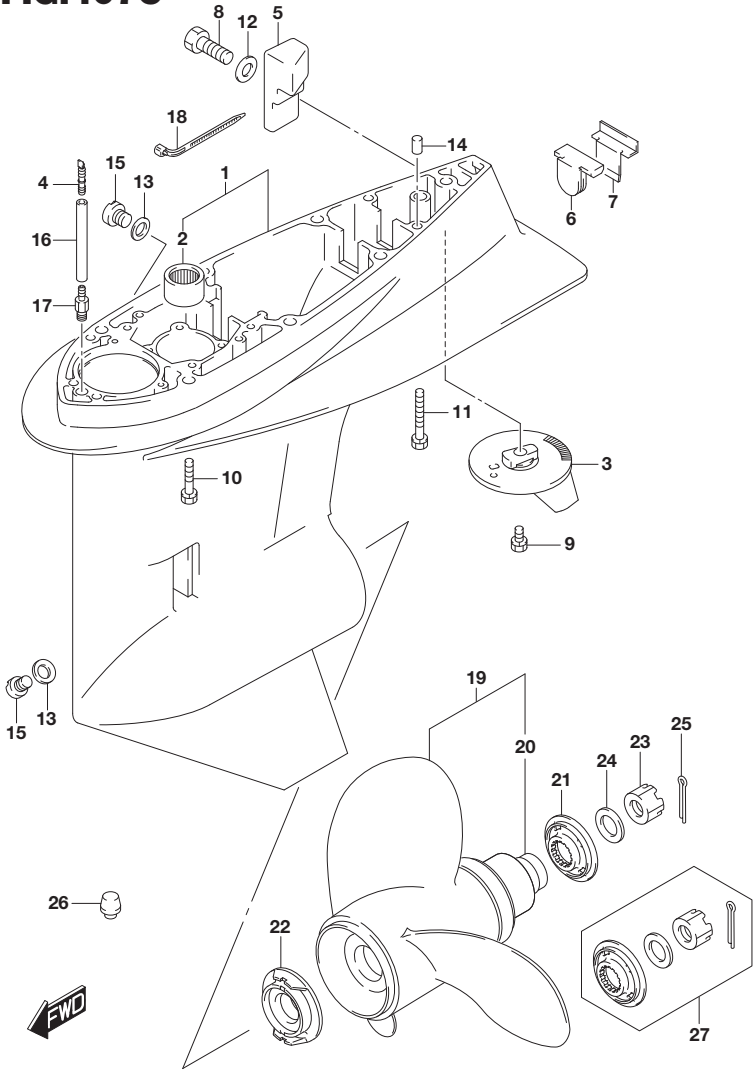

DF140BG\_E11\_021\_407C  
GEAR CASE

FIG.407C (1-E-14) GEAR CASE (DF140BZG E11)

| REF NO. | PART NO.    | DESCRIPTION             | Q'TY | REMARKS         |
|---------|-------------|-------------------------|------|-----------------|
| 21      | 57633-90J02 | SPACER, PROPELLER       | 1    |                 |
| 22      | 57635-92J01 | STOPPER, PROPELLER BUSH | 1    |                 |
| 23      | 09141-18005 | NUT                     | 1    |                 |
| 24      | 09160-18028 | WASHER (18.5X31X1)      | 1    |                 |
| 25      | 09204-03003 | PIN                     | 1    |                 |
| 26      | 55116-87E00 | PLUG                    | 1    | OPT             |
| 27      | 57630-90J00 | KIT, PROPELLER NUT      | 1    | OPT             |
| 28      | 25700-92J00 | SEALING KIT, GEAR CASE  | 1    | OPT             |
|         |             |                         |      | NOT ILLUSTRATED |

DF140BZG E11

FIG.407D

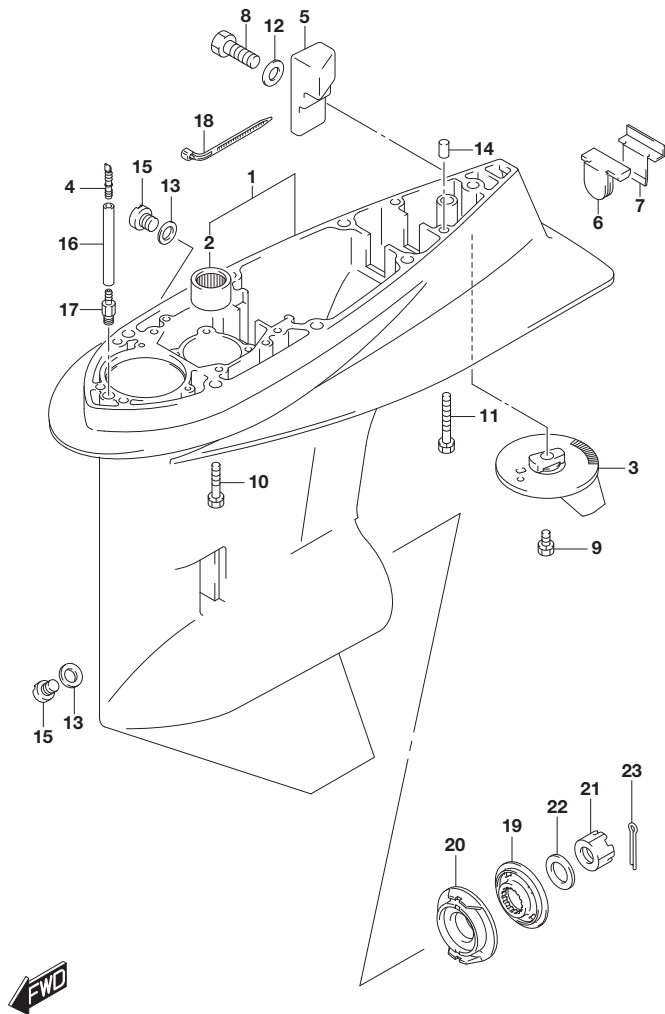


FIG.407D (1-E-15) GEAR CASE (DF140BZG E40)

| REF NO. | PART NO.        | DESCRIPTION             | Q'TY | REMARKS                    |
|---------|-----------------|-------------------------|------|----------------------------|
| 1-1     | 55110-92J01-YAY | CASE, GEAR (BLACK)      | 1    |                            |
| 1-2     | 55110-92J01-QTN | CASE, GEAR (WHITE)      | 1    |                            |
| 2       | 09263-28016     | .BEARING (28.6X38X31.8) | 1    |                            |
| 3-1     | 55125-92J00-YAY | TAB, TRIM (BLACK)       | 1    |                            |
| 3-2     | 55125-92J00-QTN | TAB, TRIM (WHITE)       | 1    |                            |
| 4       | 55127-87D00     | UNION                   | 1    |                            |
| 5       | 55321-90J01     | ANODE, GEAR CASE        | 1    |                            |
| 6       | 55332-87D12     | RUBBER, EXHAUST SEAL    | 1    |                            |
| 7       | 55333-87D10     | PLATE, EXHAUST SEAL     | 1    |                            |
| 8       | 09100-06131     | BOLT (6X12)             | 1    |                            |
| 9       | 09116-08137     | BOLT (8X22)             | 1    |                            |
| 10      | 09116-10150     | BOLT (10X55)            | 6    |                            |
| 11      | 09117-10039     | BOLT (10X80)            | 1    |                            |
| 12      | 09160-06085     | WASHER (6.5X15X1)       | 1    |                            |
| 13      | 09168-10022     | GASKET (10X17X1.5)      | 2    |                            |
| 14      | 09202-08006     | PIN (8X12)              | 2    |                            |
| 15      | 09248-10008     | PLUG (10X7.5)           | 2    |                            |
| 16-1    | 09355-40805-600 | HOSE (4X8X600)          | 1    | W/TRANSOM(L)<br>L:600->50  |
| 16-2    | 09355-40805-600 | HOSE (4X8X600)          | 1    | W/TRANSOM(X)<br>L:600->100 |
| 17      | 09362-09008     | UNION                   | 1    |                            |
| 18      | 09407-10404     | CLAMP (L:100)           | 2    |                            |
| 19      | 57633-90J02     | SPACER, PROPELLER       | 1    |                            |
| 20      | 57635-92J01     | STOPPER, PROPELLER BUSH | 1    |                            |
| 21      | 09141-18005     | NUT                     | 1    |                            |
| 22      | 09160-18028     | WASHER (18.5X31X1)      | 1    |                            |
| 23      | 09204-03003     | PIN                     | 1    |                            |
| 24      | 25700-92J00     | SEALING KIT, GEAR CASE  | 1    | OPT<br>NOT ILLUSTRATED     |

DF140BZG E40

FIG.410A

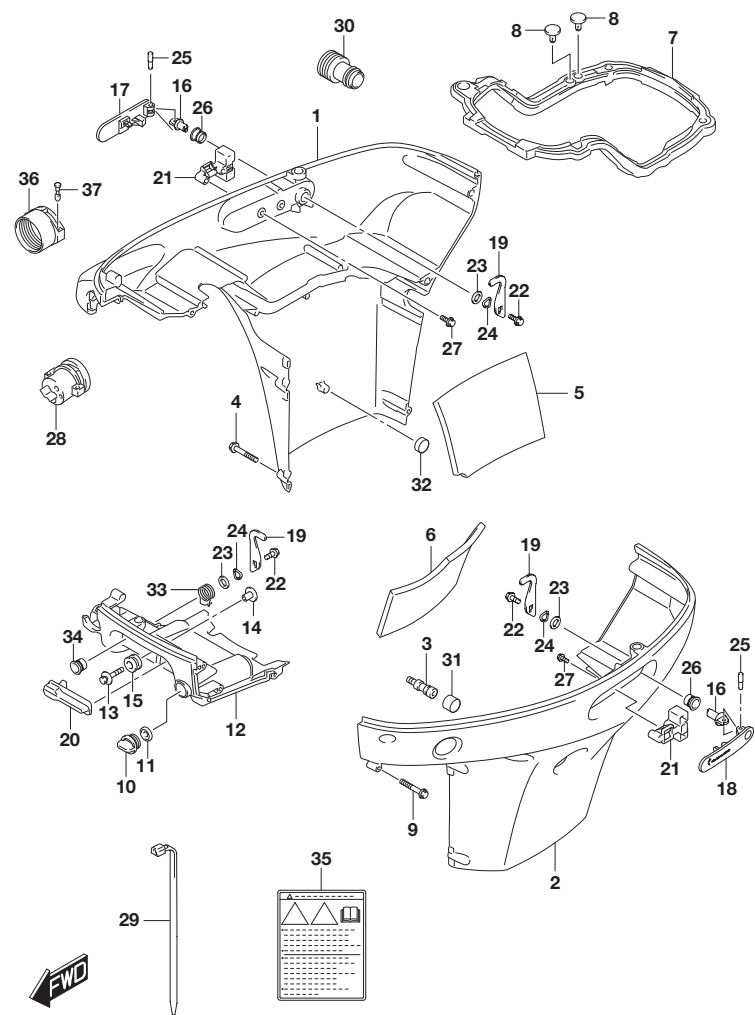


FIG.410A (1-F-2) SIDE COVER

| REF NO. | PART NO.        | DESCRIPTION               | Q'TY | REMARKS |
|---------|-----------------|---------------------------|------|---------|
| 1-1     | 61811-99L00-YAY | COVER, SIDE STBD (BLACK)  | 1    | STBD    |
| 1-2     | 61811-99L00-QTN | COVER, SIDE STBD (WHITE)  | 1    | STBD    |
| 2-1     | 61820-99L00-YAY | COVER, SIDE PORT (BLACK)  | 1    | PORT    |
| 2-2     | 61820-99L00-QTN | COVER, SIDE PORT (WHITE)  | 1    | PORT    |
| 3       | 61827-99L00     | STAND, SIDE COVER         | 1    |         |
| 4       | 09136-06149     | SCREW (6X55)              | 4    |         |
| 5       | 61814-99L00     | SILENCER, SIDE COVER STBD | 1    |         |
| 6       | 61824-99L00     | SILENCER, SIDE COVER PORT | 1    |         |
| 7       | 61134-99L00     | SEAL, SIDE COVER          | 1    |         |
| 8       | 09409-05302-5PK | CLIP (BLACK)              | 2    |         |
| 9       | 09136-06148     | SCREW (6X35)              | 7    |         |
| 10      | 17913-93J00     | PLUG, WATER               | 1    |         |
| 11      | 17914-93J01     | GASKET, WATER PLUG        | 1    |         |
| 12-1    | 61830-99L00-YAY | PANEL, FRONT (BLACK)      | 1    |         |
| 12-2    | 61830-99L00-QTN | PANEL, FRONT (WHITE)      | 1    |         |
| 13      | 09116-08174     | BOLT (8X38)               | 2    |         |
| 14      | 09169-08050     | WASHER (ID:8.5)           | 2    |         |
| 15      | 09320-11023     | CUSHION                   | 2    |         |
| 16      | 61632-93J00     | SHAFT, ENGINE COVER HOOK  | 2    |         |
| 17      | 61633-96J02     | LEVER, HOOK REAR STBD     | 1    | STBD    |
| 18      | 61634-96J02     | LEVER, HOOK REAR PORT     | 1    | PORT    |
| 19      | 61641-93J10     | HOOK, ENGINE COVER        | 3    |         |
| 20-1    | 61645-90J01-YAY | LEVER, HOOK FR (BLACK)    | 1    |         |
| 20-2    | 61645-90J01-QTN | LEVER, HOOK FR (WHITE)    | 1    |         |
| 21      | 61673-96J02     | LATCH, HOOK LEVER         | 2    |         |
| 22      | 09116-06127     | BOLT (6X12)               | 3    |         |
| 23      | 09160-13014     | WASHER (13.2X25X1)        | 3    |         |
| 24      | 09164-14008     | WASHER                    | 3    |         |
| 25      | 09202-04022     | PIN                       | 2    |         |
| 26      | 09306-13007     | BUSH                      | 2    |         |
| 27      | 09103-05026     | BOLT (5X10)               | 4    |         |
| 28      | 61124-99L00     | GROMMET, R/CON CABLE      | 1    |         |
| 29      | 09407-20405     | CLAMP (L:202)             | 1    |         |
| 30      | 17917-87L00     | CONNECTOR, FLUSH WATER    | 1    |         |

FIG.410A

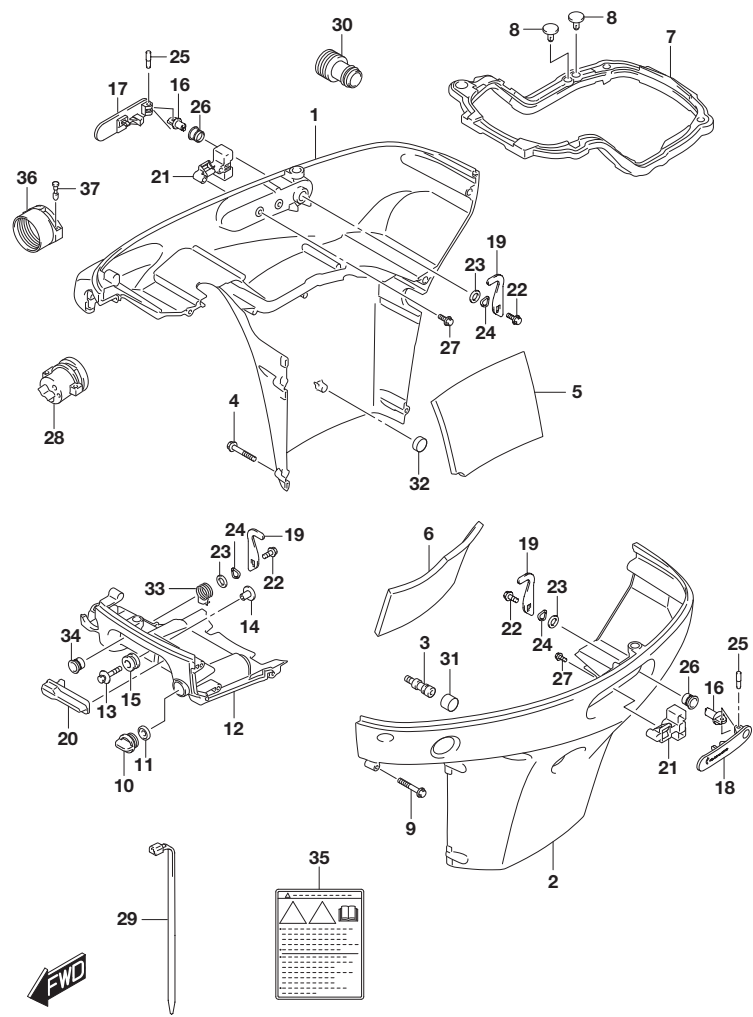


FIG.410A (1-F-3) SIDE COVER

| REF NO. | PART NO.    | DESCRIPTION               | Q'TY | REMARKS |
|---------|-------------|---------------------------|------|---------|
| 31      | 09329-14004 | CUSHION,SIDE COVER HOLDER | 1    |         |
| 32      | 09329-14003 | CUSHION(14X20X9)          | 2    |         |
| 33      | 61648-99L00 | SPRING,HOOK LEVER         | 1    |         |
| 34      | 09306-13011 | BUSH                      | 1    |         |
| 35      | 61458-90J01 | LABEL, ENGINE COVER       | 1    |         |
| 36      | 67361-90J10 | ADAPTER, HOSE             | 1    | OPT     |
| 37      | 09208-06011 | PIN                       | 2    | OPT     |

FIG.420A

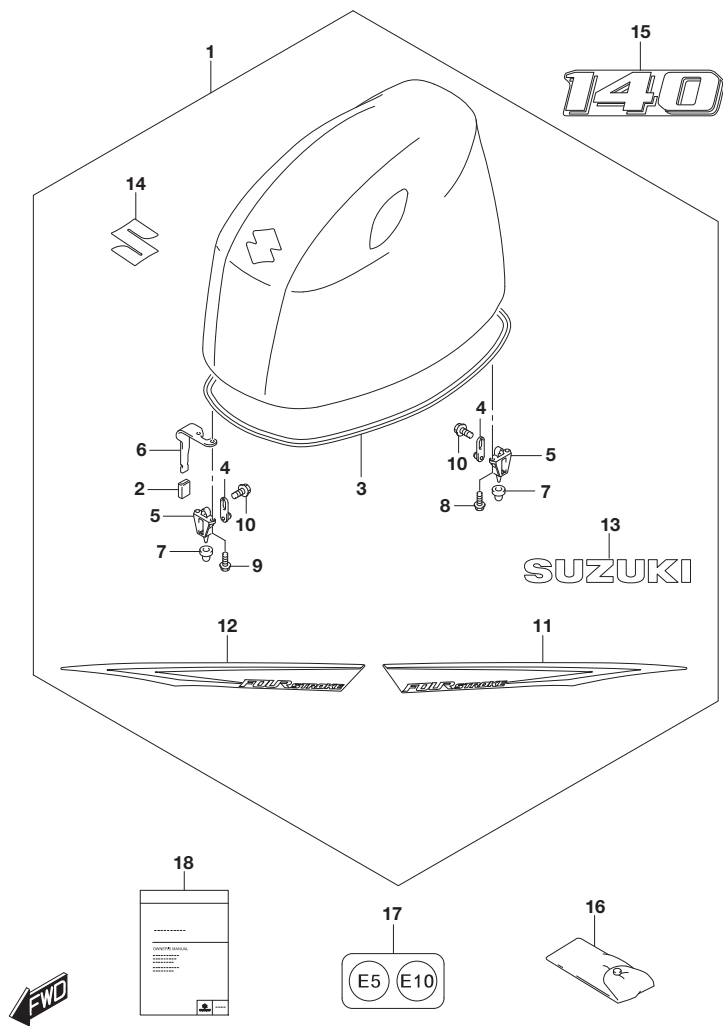


FIG.420A (1-F-4) ENGINE COVER

| REF NO. | PART NO.        | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-----------------|--------------------------------|------|---------|
| 1-1     | 61401-99810-YAY | COVER SET, ENGINE (BLACK)      | 1    | FOR YAY |
| 1-2     | 61401-99820-QTN | COVER SET, ENGINE (WHITE)      | 1    | FOR QTN |
| 2       | 41225-94401     | .CUSHION,COVER STAND           | 1    |         |
| 3       | 61112-99L00     | .SEAL,ENGINE COVER             | 1    |         |
| 4       | 61610-93J00     | .FASTENER                      | 3    |         |
| 5       | 61621-93J01     | .BRACKET,FASTENER              | 3    |         |
| 6       | 61682-99L00     | .STAND,ENGINE COVER            | 1    |         |
| 7       | 09329-10024     | .CUSHION,ENGINE COVER FASTENER | 3    |         |
| 8       | 01547-0616C     | .BOLT                          | 4    |         |
| 9       | 01547-0620C     | .BOLT                          | 2    |         |
| 10      | 01550-0612C     | .BOLT                          | 3    |         |
| 11-1    | 61443-99L00     | .STRIPE,ENGINE COVER STBD      | 1    | FOR YAY |
| 11-2    | 61443-99L10     | .STRIPE,ENGINE COVER STBD      | 1    | FOR QTN |
| 12-1    | 61453-99L00     | .STRIPE,ENGINE COVER PORT      | 1    | FOR YAY |
| 12-2    | 61453-99L10     | .STRIPE,ENGINE COVER PORT      | 1    | FOR QTN |
| 13      | 61441-92J10     | .MARK,SUZUKI                   | 2    |         |
| 14      | 68111-93J00     | .EMBLEM,S                      | 1    |         |
| 15-1    | 61435-99L00     | MARK,EMBLEM REAR(140)          | 1    | FOR YAY |
| 15-2    | 61435-99L10     | MARK,EMBLEM REAR(140)          | 1    | FOR QTN |
| 16      | 09800-81841     | TOOL SET                       | 1    |         |
| 17      | 11959-15HA1     | LABEL,GASOLINE                 | 1    |         |
| 18-1    | 99011-99L00-054 | MANUAL,OWNER'S                 | 1    | E11     |
| 18-2    | 99011-99L00-03B | MANUAL,OWNER'S                 | 1    | E11     |
| 18-3    | 99011-99L00-059 | MANUAL,OWNER'S                 | 1    | E11,E40 |



FIG.430A

FIG.430A (1-F-5) FUEL HOSE

| REF NO. | PART NO.    | DESCRIPTION                 | Q'TY | REMARKS |
|---------|-------------|-----------------------------|------|---------|
| 1       | 65700-90J24 | HOSE, FUEL (TANK TO ENGINE) | 1    |         |
| 2       | 65750-95501 | .SOCKET, FUEL HOSE          | 1    |         |
| 3       | 65770-90J13 | .PUMP, SQUEEZE              | 1    |         |
| 4       | 09401-11423 | CLIP                        | 1    |         |


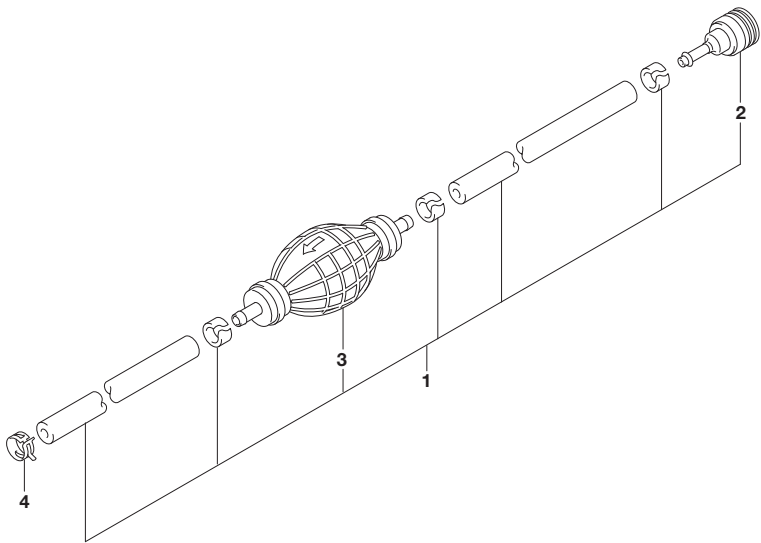


FIG.432A

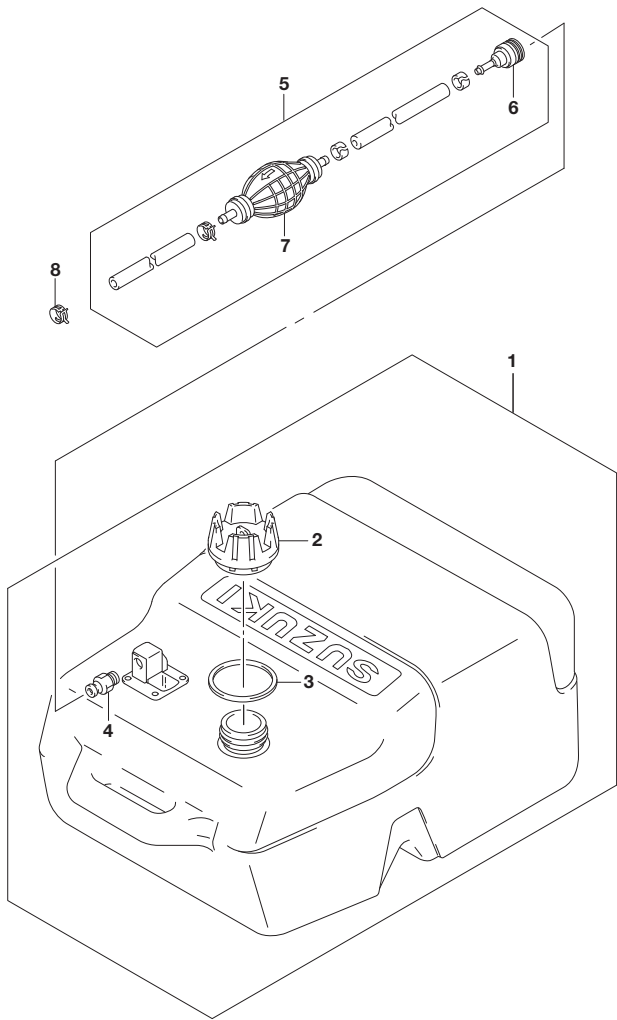

DF140BG\_E11\_021\_432A  
FUEL TANK

FIG.432A (1-F-6) FUEL TANK (E40)

| REF NO. | PART NO.    | DESCRIPTION                 | Q'TY | REMARKS |
|---------|-------------|-----------------------------|------|---------|
| 1       | 65000-94L10 | TANK ASSY, FUEL (25L)       | 1    |         |
| 2       | 65520-99100 | .CAP ASSY, FUEL TANK        | 1    |         |
| 3       | 65561-95D00 | .GASKET, TANK CAP           | 1    |         |
| 4       | 65740-95D01 | .PLUG, FUEL CONNECTOR       | 1    |         |
| 5       | 65700-90J24 | HOSE, FUEL (TANK TO ENGINE) | 1    |         |
| 6       | 65750-95501 | .SOCKET, FUEL HOSE          | 1    |         |
| 7       | 65770-90J13 | .PUMP, SQUEEZE              | 1    |         |
| 8       | 09401-11423 | CLIP                        | 1    |         |

DF140BG E40  
DF140BZG E40

DF140BG\_E11\_021

FIG.442A

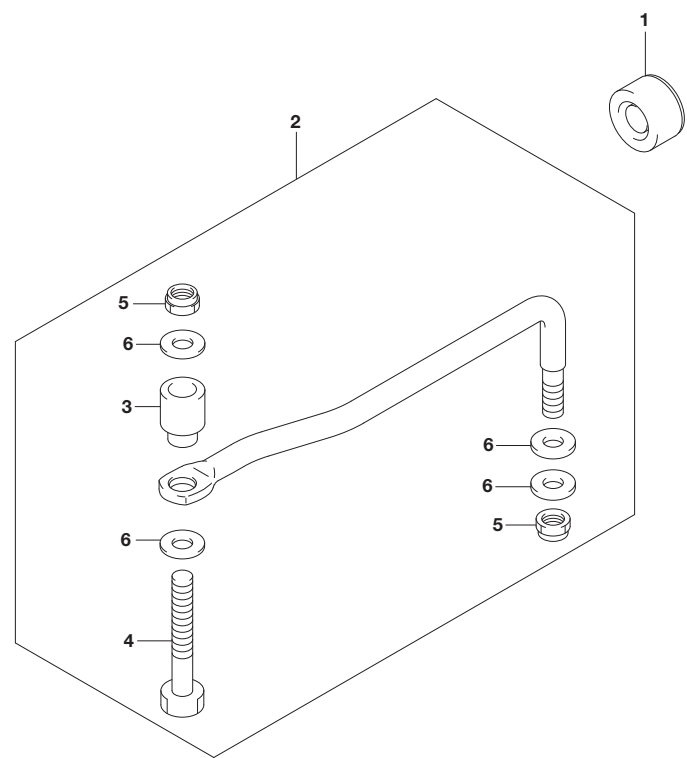


FIG.442A (1-F-7) DRAG LINK

| REF NO. | PART NO.    | DESCRIPTION           | Q'TY | REMARKS             |
|---------|-------------|-----------------------|------|---------------------|
| 1       | 41161-94400 | SEAL, STEERING CABLE  | 1    |                     |
| 2       | 67701-90J01 | LINK, DRAG            | 1    |                     |
| 3       | 67721-99E00 | .SPACER               | 1    |                     |
| 4       | 67725-99E00 | .BOLT, DRAG LINK      | 1    |                     |
| 5       | 67726-99E00 | .NUT                  | 2    |                     |
| 6       | 67728-99E00 | .WASHER               | 4    |                     |
| 7       | 67600-99L00 | KIT, TIE ROD          | 1    | OPT,NOT ILLUSTRATED |
| 8       | 67631-99L00 | .BRACKET, TIE ROD     | 2    | OPT,NOT ILLUSTRATED |
| 9       | 67725-99E10 | .BOLT                 | 2    | OPT,NOT ILLUSTRATED |
| 10      | 67726-99E00 | .NUT                  | 2    | OPT,NOT ILLUSTRATED |
| 11      | 09100-12081 | .BOLT (12X25)         | 4    | OPT,NOT ILLUSTRATED |
| 12      | 09160-12066 | .WASHER (12.5X22X2.5) | 4    | OPT,NOT ILLUSTRATED |
| 13      | 09180-09022 | .SPACER (9.6X18X12)   | 2    | OPT,NOT ILLUSTRATED |

FIG.475A

FIG.475A (1-F-8) SQUEEZE PUMP (E11)

| REF NO. | PART NO.    | DESCRIPTION   | Q'TY | REMARKS |
|---------|-------------|---------------|------|---------|
| 1       | 65770-90J04 | PUMP, SQUEEZE | 1    |         |

DF140BG E11  
DF140BZG E11




FIG.507A


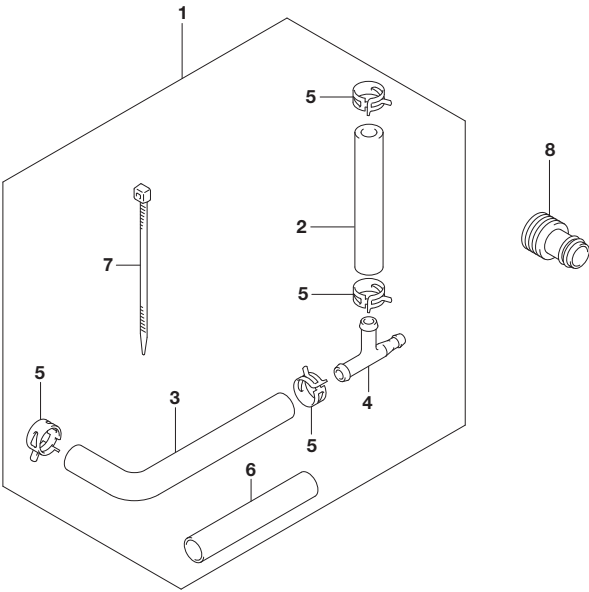


FIG.507A (1-F-9) OPT:WATER PRESSURE GAUGE SUB KIT

| REF NO. | PART NO.        | DESCRIPTION               | Q'TY | REMARKS    |
|---------|-----------------|---------------------------|------|------------|
| 1       | 34660-90J04     | WATER PRESS GAUGE SUB KIT | 1    |            |
| 2       | 09352-50006-600 | .HOSE (5X9X600)           | 1    | L:600->160 |
| 3       | 09352-50006-600 | .HOSE (5X9X600)           | 1    | L:600->210 |
| 4       | 09367-06006     | .3 WAY                    | 1    |            |
| 5       | 09401-08413     | .CLIP                     | 4    |            |
| 6       | 18498-99EA1     | .PROTECTOR (9.5X11.5X80)  | 1    |            |
| 7       | 09407-20405     | .CLAMP (L:202)            | 1    |            |
| 8       | 17917-87L00     | CONNECTOR, FLUSH WATER    | 1    |            |

# FIG.520A

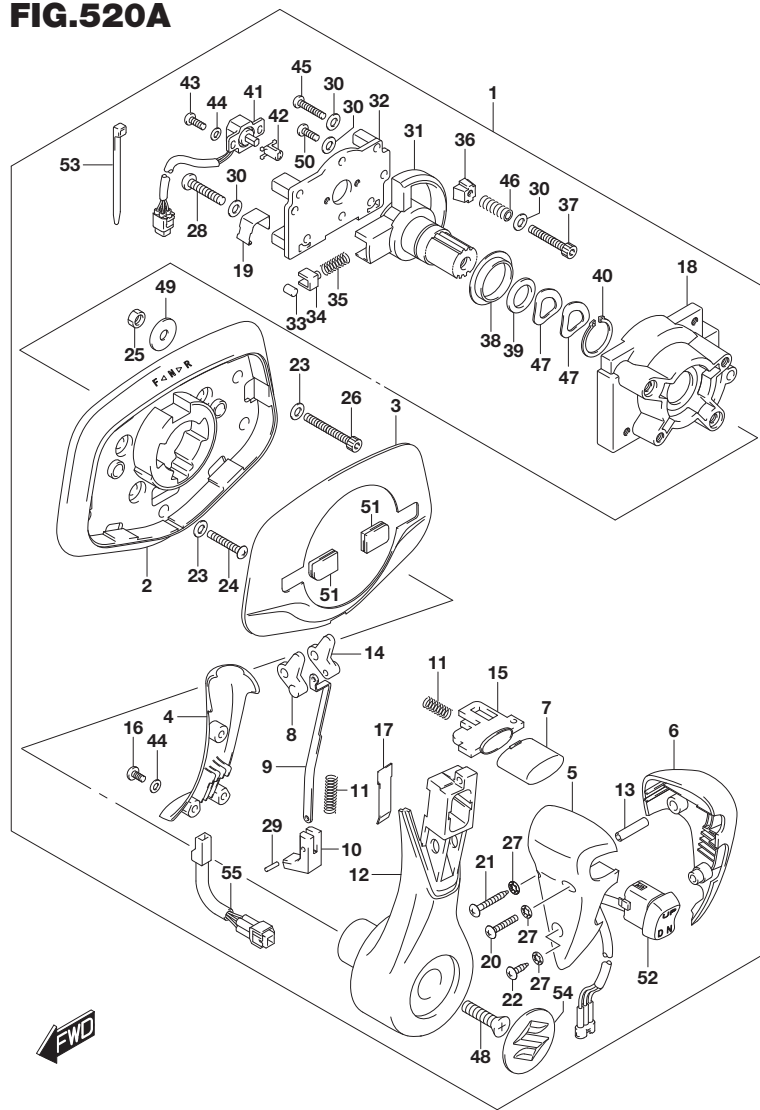

## FIG.520A (1-F-10) OPT:FLUSH MOUNT REMOCON

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 67200-98J24 | REMOTE CONTROL ASSY, FLASH MT  | 1    |         |
| 2       | 67271-98J20 | .COVER, BOTTOM BASE            | 1    |         |
| 3       | 67264-98J00 | .COVER, TOP BASE               | 1    |         |
| 4       | 67263-98J20 | .COVER, LEVER                  | 1    |         |
| 5       | 67261-98J20 | .GRIP, A                       | 1    |         |
| 6       | 67261-98J30 | .GRIP, B                       | 1    |         |
| 7       | 67265-98J00 | .BUTTON, NEUTRAL LOCK          | 1    |         |
| 8       | 67255-98J00 | .LINK, NEUTRAL LOCK NO.1       | 1    |         |
| 9       | 67258-98J00 | .PLATE, JOINT                  | 1    |         |
| 10      | 67256-98J00 | .BLOCK, NEUTRAL LOCK           | 1    |         |
| 11      | 67259-98J00 | .SPRING                        | 3    |         |
| 12      | 67251-98J20 | .LEVER, HANDLE                 | 1    |         |
| 13      | 67294-98J00 | .SPACER                        | 1    |         |
| 14      | 67254-98J00 | .LINK, NEUTRAL LOCK NO.2       | 1    |         |
| 15      | 67233-98J00 | .SLIDER, NEUTRAL BUTTON        | 1    |         |
| 16      | 67296-98JA0 | .SCREW (4X10)                  | 3    |         |
| 17      | 67234-98J00 | .PLATE, LEVER                  | 1    |         |
| 18      | 67211-98J20 | .HOUSING                       | 1    |         |
| 19      | 67269-98J20 | .CLAMP, LEAD                   | 1    |         |
| 20      | 67296-98JB0 | .SCREW (4X30)                  | 1    |         |
| 21      | 67227-98J20 | .SCREW (4X35)                  | 1    |         |
| 22      | 67227-98J30 | .SCREW (4X20)                  | 1    |         |
| 23      | 67288-98J50 | .WASHER, PLANE                 | 8    |         |
| 24      | 67296-98JC0 | .SCREW (6X40)                  | 4    |         |
| 25      | 67287-98J00 | .NUT                           | 4    |         |
| 26      | 67226-98J10 | .BOLT (6X50)                   | 4    |         |
| 27      | 67288-98J60 | .WASHER, ININTERNAL TOOTH (M4) | 3    |         |
| 28      | 67296-98JD0 | .SCREW (5X40)                  | 1    |         |
| 29      | 67238-98J00 | .PIN                           | 2    |         |
| 30      | 67288-98J70 | .WASHER, PLANE                 | 5    |         |
| 31      | 67246-98J00 | .SHAFT, DRIVE                  | 1    |         |
| 32      | 67222-98J00 | .PANEL ASSY, BACK              | 1    |         |
| 33      | 67236-98J00 | .ROLLER, DETENT                | 1    |         |
| 34      | 67235-98J00 | .GUIDE, DETENT ROOLER          | 1    |         |

FIG.520A

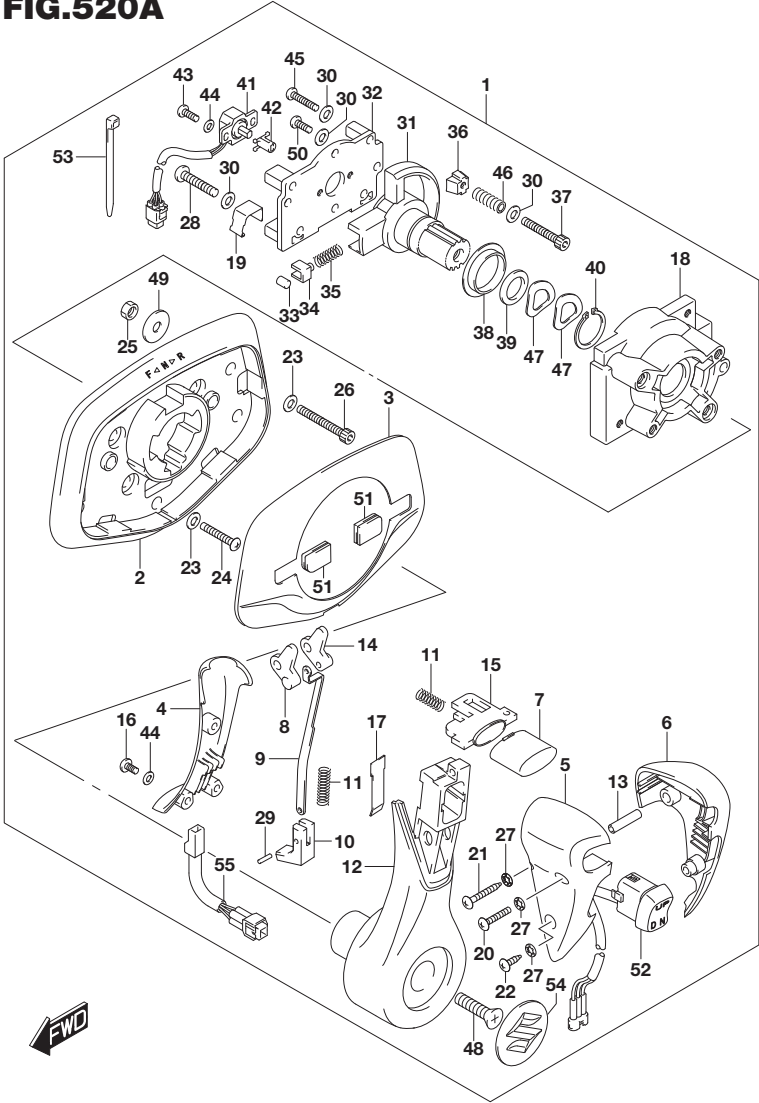


FIG.520A (1-F-11) OPT:FLUSH MOUNT REMOCON

| REF NO. | PART NO.    | DESCRIPTION                 | Q'TY | REMARKS |
|---------|-------------|-----------------------------|------|---------|
| 35      | 67237-98J00 | .SPRING, DETENT             | 1    |         |
| 36      | 67223-98J00 | .PAD, BRAKE                 | 1    |         |
| 37      | 67296-98JE0 | .SCREW (5X35)               | 1    |         |
| 38      | 67252-98J00 | .BUSH, DRIVE SHAFT          | 1    |         |
| 39      | 67288-98J20 | .WASHER                     | 1    |         |
| 40      | 67292-98J00 | .C RING                     | 1    |         |
| 41      | 15980-98J00 | .POTENTIOMETER              | 1    |         |
| 42      | 67227-98J10 | .LEVER, POTENTIOMETER NO.2  | 1    |         |
| 43      | 67296-94300 | .SCREW (4X10)               | 2    |         |
| 44      | 67288-98J00 | .WASHER, POTENTIOMETER      | 5    |         |
| 45      | 67296-98J10 | .SCREW (5X35)               | 1    |         |
| 46      | 67288-98J10 | .WASHER, SPRING             | 8    |         |
| 47      | 67228-98J50 | .WASHER, WAVE               | 2    |         |
| 48      | 67296-98J60 | .SCREW (8X30)               | 1    |         |
| 49      | 09160-06104 | .WASHER (6.5X24X2)          | 4    |         |
| 50      | 67296-98J50 | .SCREW (5X18)               | 2    |         |
| 51      | 67272-98J00 | .GROMMET, COVER             | 2    |         |
| 52      | 37850-98J03 | .SWITCH ASSY, PTT           | 1    |         |
| 53      | 67269-98J10 | .BAND                       | 1    |         |
| 54      | 67257-98J00 | .MARK, LEVER                | 1    |         |
| 55      | 36890-98J00 | .HARNESS, CONDENSER ADAPTER | 1    |         |

FIG.522A

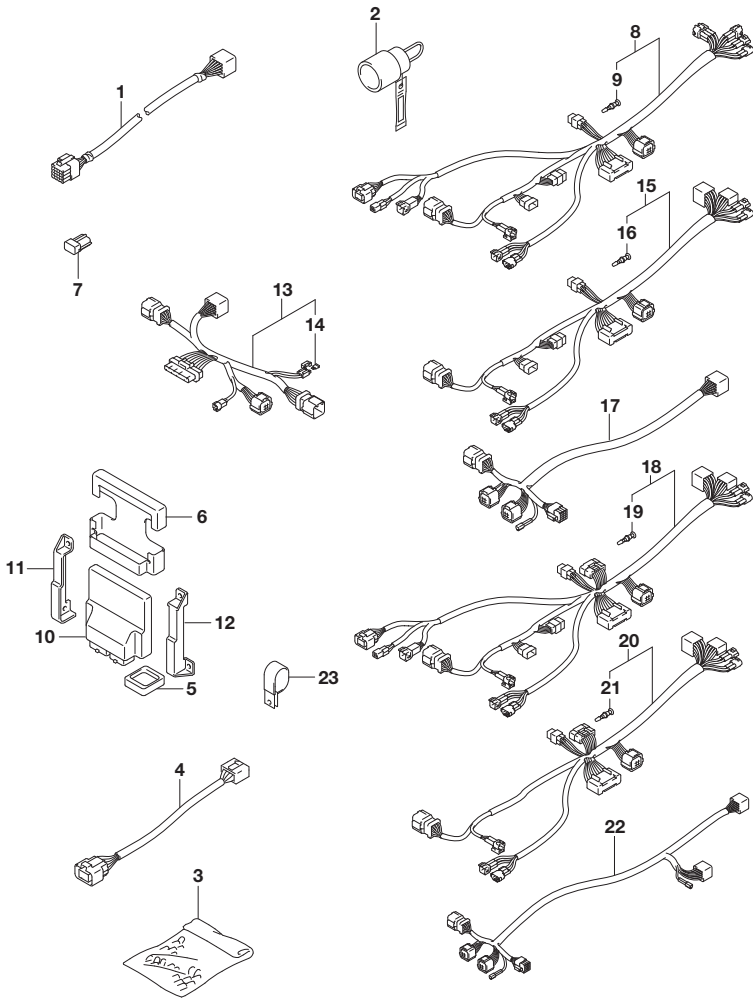


FIG.522A (1-F-12) OPT:HARNESS (1)

| REF NO. | PART NO.    | DESCRIPTION                     | Q'TY | REMARKS |
|---------|-------------|---------------------------------|------|---------|
| 1       | 36620-98J51 | WIRE ASSY, REMOTE CONTROL       | 1    |         |
| 2       | 36612-98J20 | CONNECTOR, COUNTER SELECT       | AR   |         |
| 3       | 36990-87D00 | TERMINAL & SLEEVE SET           | 1    |         |
| 4       | 36667-96L20 | WIRE, GAUGE EXT                 | 1    |         |
| 5       | 33911-88BL0 | CAP, RUBBER                     | 1    |         |
| 6       | 33925-93J00 | CUSHION, ENGINE CONTROL UNIT    | AR   |         |
| 7       | 33926-98J00 | RESISTOR, TERMINAL              | AR   |         |
| 8       | 36623-98J21 | HARNESS ASSY,BCM NO.1 FOR SNGL  | 1    |         |
| 9       | 36615-96300 | .TERMINAL                       | 4    |         |
| 10-1    | 36770-98J13 | CONTROLLER ASSY, BOAT ELECTRIC  | 1    |         |
| 10-2    | 36770-98J22 | CONTROLLER ASSY, BOAT ELECTRIC  | 2    |         |
| 11      | 36775-98J00 | HOLDER, BCM LH                  | AR   |         |
| 12      | 36776-98J00 | HOLDER, BCM RH                  | AR   |         |
| 13      | 36622-98J00 | HARNESS ASSY,DUAL STATION MAIN  | AR   |         |
| 14      | 09481-10501 | .FUSE (10A)                     | AR   |         |
| 15      | 36624-98J02 | HARNESS ASSY, BCM NO.2 FOR SNGL | 1    |         |
| 16      | 36615-96300 | .TERMINAL                       | 2    |         |
| 17      | 36621-98J00 | HARNESS ASSY, DUAL ENGINE       | AR   |         |
| 18      | 36623-98J30 | HARNESS ASSY, BCM NO.1 FOR MULT | 1    |         |
| 19      | 36615-96300 | .TERMINAL                       | 5    |         |
| 20      | 36624-98J11 | HARNESS ASSY, BCM NO.2 FOR MULT | 1    |         |
| 21      | 36615-96300 | .TERMINAL                       | 2    |         |
| 22      | 36621-98J10 | HARNESS ASSY, TRIPLE ENGINE     | 1    |         |
| 23      | 09403-13402 | CLAMP (ID:13)                   | AR   |         |



FIG.523A


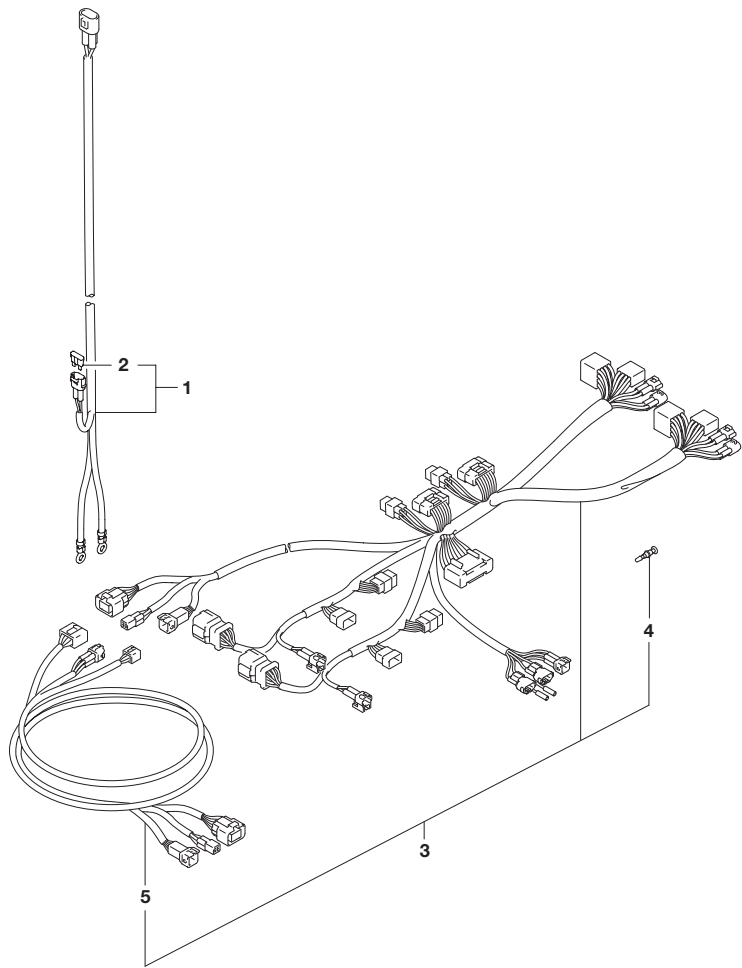


FIG.523A (1-F-13) OPT:HARNESS (2)

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 36625-98J10 | WIRE ASSY, BATTERY             | AR   |         |
| 2       | 09481-30501 | .FUSE (30A)                    | AR   |         |
| 3       | 36623-98J40 | HARNESS ASSY,BCM FOR QUADRUPLE | 1    |         |
| 4       | 36615-96300 | .TERMINAL                      | 8    |         |
| 5       | 36627-98J00 | .HARNESS, R/CON EXTENSION      | 1    |         |

FIG.530A

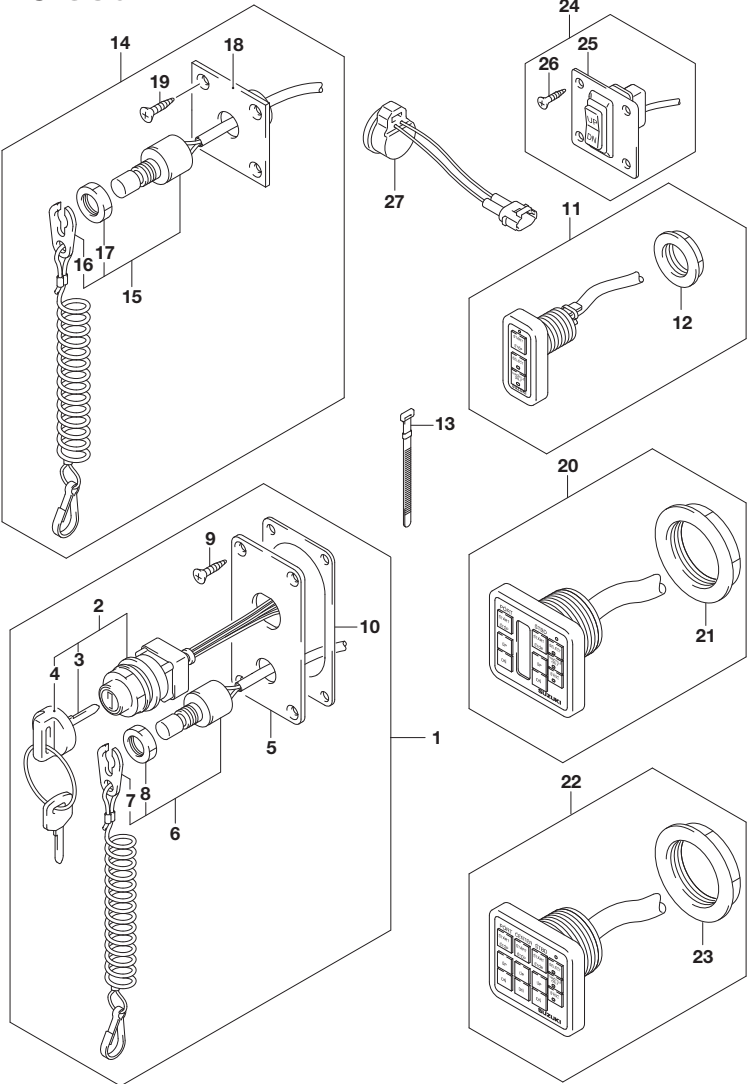

DF140BG\_E11\_021\_530A  
OPT:SWITCH

FIG.530A (1-F-14) OPT:SWITCH

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 37100-98J07 | PANEL ASSY, MAIN SWITCH        | 1    |         |
| 2       | 37110-98J02 | .SWITCH ASSY, MAIN             | 1    |         |
| 3-1     | 37141-99EA0 | ..KEY (941)                    | 1    |         |
| 3-2     | 37141-99EB0 | ..KEY (942)                    | 1    |         |
| 3-3     | 37141-99E00 | ..KEY (931)                    | 1    |         |
| 3-4     | 37141-99E10 | ..KEY (932)                    | 1    |         |
| 3-5     | 37141-99E20 | ..KEY (933)                    | 1    |         |
| 3-6     | 37141-99E30 | ..KEY (934)                    | 1    |         |
| 3-7     | 37141-99E40 | ..KEY (935)                    | 1    |         |
| 3-8     | 37141-99E50 | ..KEY (936)                    | 1    |         |
| 3-9     | 37141-99E60 | ..KEY (937)                    | 1    |         |
| 3-10    | 37141-99E70 | ..KEY (938)                    | 1    |         |
| 3-11    | 37141-99E80 | ..KEY (939)                    | 1    |         |
| 3-12    | 37141-99E90 | ..KEY (940)                    | 1    |         |
| 4       | 37143-99E01 | ..CAP, KEY                     | 1    |         |
| 5       | 37139-98J10 | .PANEL, MAIN SW                | 1    |         |
| 6       | 37820-93J11 | .SWITCH ASSY,EMERGENCY         | 1    |         |
| 7       | 37823-92E02 | ..PLATE ASSY,EMERGENCY SW LOCK | 1    |         |
| 8       | 37826-92J10 | ..NUT                          | 1    |         |
| 9       | 03122-05165 | .SCREW                         | 4    |         |
| 10      | 37114-98J00 | .SHEET, MAIN SW PANEL          | 1    |         |
| 11      | 37100-98J11 | PANEL ASSY, SINGLE             | 1    |         |
| 12      | 37112-98J00 | .NUT                           | 1    |         |
| 13      | 09407-08401 | CLAMP (L:80)                   | AR   |         |
| 14      | 37803-93J06 | PANEL ASSY, EMERGENCY SW       | 1    |         |
| 15      | 37820-93J11 | .SWITCH ASSY, EMERGENCY        | 1    |         |
| 16      | 37823-92E02 | ..PLATE ASSY,EMERGENCY SW LOCK | 1    |         |
| 17      | 37826-92J10 | ..NUT                          | 1    |         |
| 18      | 37825-99E10 | .PANEL, EMERGENCY STOP SW      | 1    |         |
| 19      | 03122-05169 | .SCREW                         | 4    |         |
| 20      | 37100-98J21 | PANEL ASSY, DUAL               | AR   |         |
| 21      | 37112-98J10 | .NUT                           | AR   |         |
| 22      | 37100-98J31 | PANEL ASSY, TRIPLE             | 1    |         |
| 23      | 37112-98J10 | .NUT                           | 1    |         |

FIG.530A

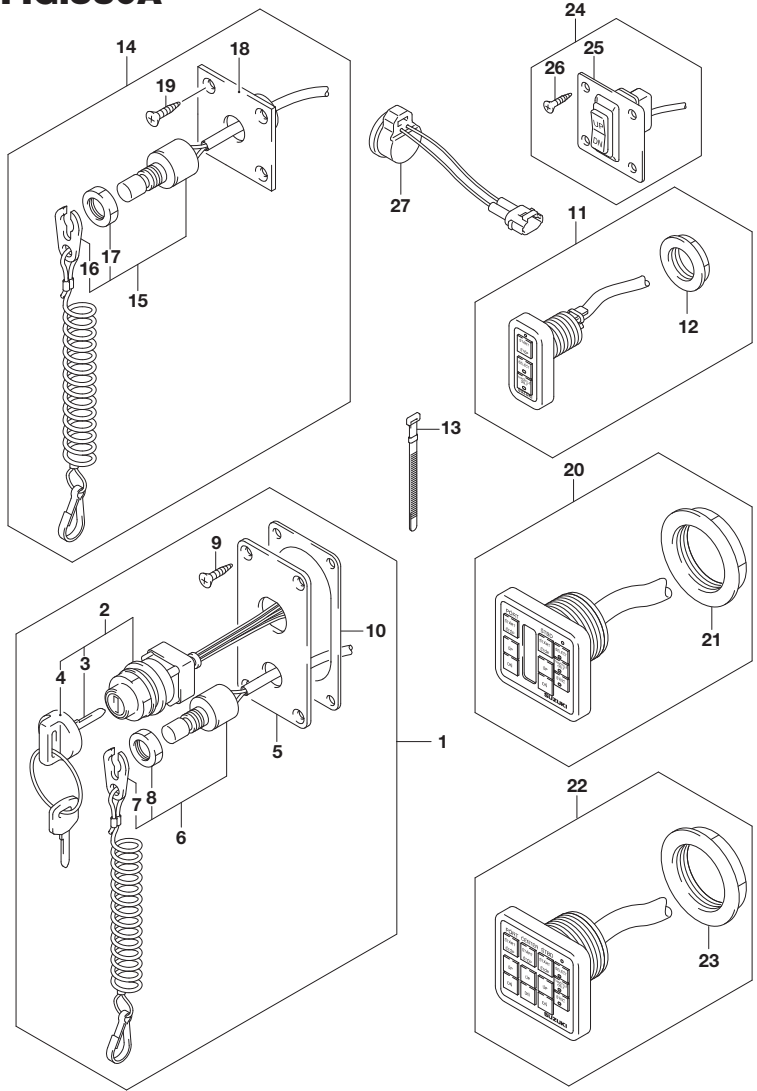


FIG.530A (1-F-15) OPT:SWITCH

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 24      | 37860-87L00 | PANEL ASSY,TROLLING CONTROL SW | 1    |         |
| 25      | 37862-87L00 | .PANEL                         | 1    |         |
| 26      | 09131-05004 | .SCREW (5X16)                  | 4    |         |
| 27      | 38500-93J90 | BUZZER, WARNING                | AR   |         |

**FIG.535A**

This diagram illustrates the components of a Suzuki Security System, numbered 1 through 27. The main assembly area shows a control panel (1) with a mounting plate (2) and a speaker (4). A coiled cable (8) is connected to the panel. A separate inset shows a battery (23) and a remote control (24) connected to a receiver (22). Another inset shows a wiring harness (15) with multiple connectors. A separate component (17) is shown with a cable. A small rectangular component (19) is also shown. A larger component (16) is shown with a connector. A small rectangular component (12) is shown. A small rectangular component (18) is shown. A small rectangular component (20) is shown. A small rectangular component (21) is shown. A small rectangular component (25) is shown. A small rectangular component (26) is shown. A small rectangular component (27) is shown.

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

SUZUKI  
SECURITY  
SYSTEM

| REF NO. | PART NO.    | DESCRIPTION                            | Q'TY | REMARKS    |
|---------|-------------|----------------------------------------|------|------------|
| 1       | 37100-96L02 | PANEL ASSY, MAIN SWITCH                | 1    |            |
| 2       | 37110-96L00 | .SWITCH ASSY, MAIN                     | 1    |            |
| 3-1     | 37141-99E00 | ..KEY (931)                            | 1    |            |
| 3-2     | 37141-99E10 | ..KEY (932)                            | 1    |            |
| 3-3     | 37141-99E20 | ..KEY (933)                            | 1    |            |
| 3-4     | 37141-99E30 | ..KEY (934)                            | 1    |            |
| 3-5     | 37141-99E40 | ..KEY (935)                            | 1    |            |
| 3-6     | 37141-99E50 | ..KEY (936)                            | 1    |            |
| 4       | 37143-96L00 | ..KNOB, MAIN SWITCH                    | 1    |            |
| 5       | 37114-98J00 | .SHEET, MAIN SW PANEL                  | 1    |            |
| 6       | 37139-96L30 | .PANEL, MAIN SWITCH                    | 1    |            |
| 7       | 37820-93J11 | .SWITCH ASSY, EMERGENCY                | 1    |            |
| 8       | 37823-92E02 | ..PLATE ASSY,EMERGENCY SW LOCK         | 1    |            |
| 9       | 37826-92J10 | ..NUT                                  | 1    |            |
| 10      | 03122-05165 | .SCREW                                 | 4    |            |
| 11      | 37105-96L04 | HARNESS SET, KLS CONTROLLER            | 1    |            |
| 12      | 32980-38F00 | .CUSHION, CDI UNIT                     | 1    |            |
| 13      | 36623-96L02 | .HARNESS ASSY, KLS CONTROLLER          | 1    |            |
| 14      | 36615-96300 | ..TERMINAL                             | 1    |            |
| 15      | 36662-96L01 | .HARNESS ASSY, KLS CAN<br>(L:6500+110) | 1    |            |
| 16      | 37173-96L10 | .HOLDER, KLS PARTS                     | 1    | SMALL TYPE |
| 17      | 38500-93J90 | .BUZZER, WARNING                       | 1    |            |
| 18      | 38860-96L01 | .RELAY ASSY, KLS                       | 1    |            |
| 19      | 32851-93J00 | .CUSHION, LEAD WIRE                    | 1    |            |
| 20      | 09407-14407 | .CLAMP (L:145)                         | 1    |            |
| 21-1    | 37170-96L04 | CONTROLLER SET, KLS                    | 1    | 433MHZ     |
| 21-2    | 37170-96L14 | CONTROLLER SET, KLS                    | 1    | 315MHZ     |
| 22      | 37117-96L00 | .DECAL, KLS                            | 2    |            |
| 23-1    | 37171-96L02 | .CONTROLLER ASSY, KLS                  | 1    | 433MHZ     |
| 23-2    | 37171-96L12 | .CONTROLLER ASSY, KLS                  | 1    | 315MHZ     |
| 24-1    | 37172-96L01 | .REMOCON ASSY, KLS                     | 2    | 433MHZ     |
| 24-2    | 37172-96L10 | .REMOCON ASSY, KLS                     | 2    | 315MHZ     |

FIG.535A


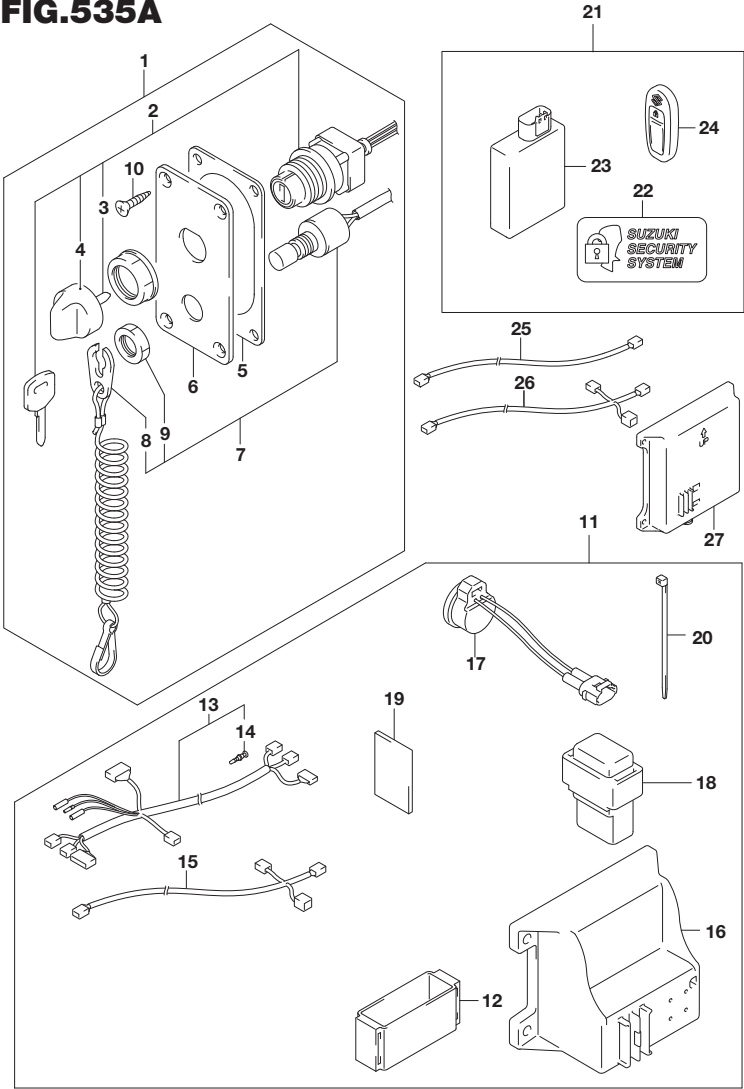


FIG.535A (1-G-3) OPT:KEY LESS START (E11)

| REF NO. | PART NO.    | DESCRIPTION                          | Q'TY | REMARKS    |
|---------|-------------|--------------------------------------|------|------------|
| 25      | 36663-96L00 | WIRE, KLS CAN EXT                    | 1    |            |
| 26      | 36664-96L00 | HARNESS ASSY, KLS CAN<br>(L:810+110) | AR   |            |
| 27      | 37173-96L00 | HOLDER, KLS PARTS                    | 1    | LARGE TYPE |

DF140BG E11  
DF140BZG E11

FIG.540A

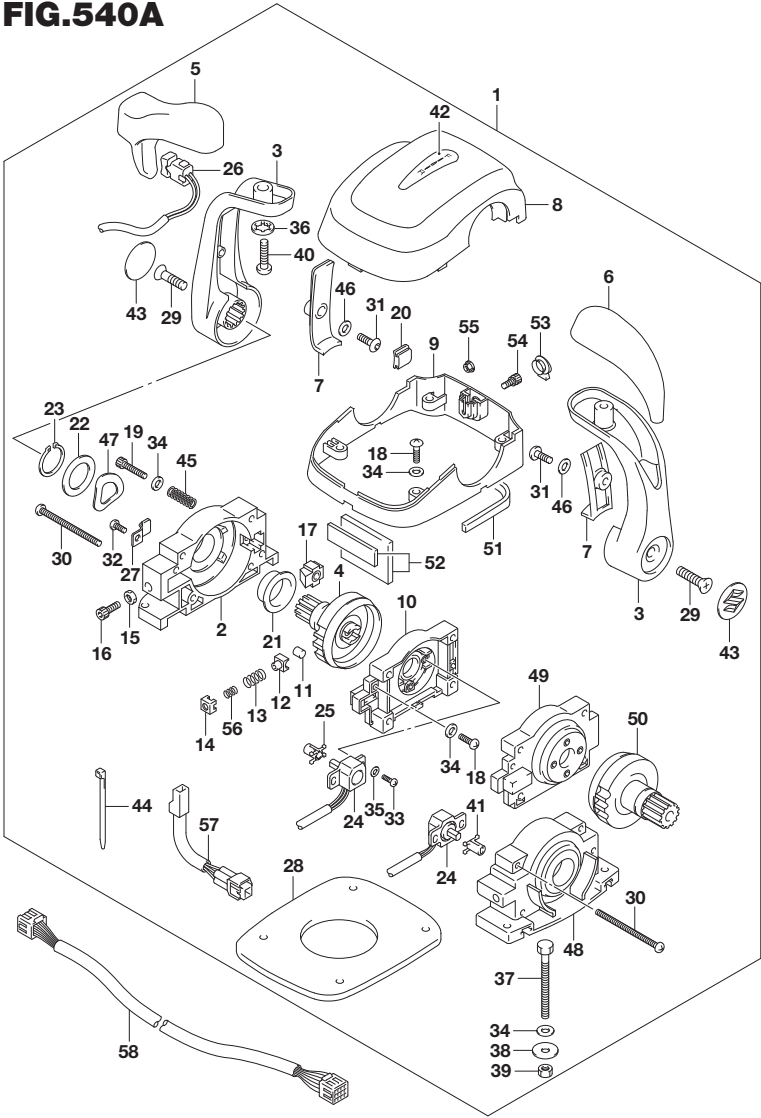

DF140BG\_E11\_021\_540A  
OPT:REMOTE CONTROL ASSY DUAL

FIG.540A (1-G-4) OPT:REMOTE CONTROL ASSY DUAL

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 67200-98J16 | REMOTE CONTROL ASSY, MULTIPLE  | 1    |         |
| 2       | 67211-98J20 | .HOUSING                       | 1    |         |
| 3       | 67251-98J00 | .LEVER, HANDLE                 | 2    |         |
| 4       | 67246-98J10 | .SHAFT, DRIVE REMOCON          | 1    |         |
| 5       | 67261-98J00 | .GRIP, NO.1                    | 1    |         |
| 6       | 67261-98J10 | .GRIP, NO.2                    | 1    |         |
| 7       | 67263-98J00 | .COVER, LEVER                  | 2    |         |
| 8       | 67212-98J30 | .COVER, REMOCON UPPER          | 1    | UPPER   |
| 9       | 67271-98J40 | .COVER, REMOCON BOTTOM         | 1    |         |
| 10      | 67222-98J10 | .PANEL ASSY, BACK              | 1    |         |
| 11      | 67236-98J10 | .ROLLER, DETENT                | 2    |         |
| 12      | 67235-98J10 | .GUIDE, DETENT ROLLER          | 2    |         |
| 13      | 67237-98J40 | .SPRING, DETENT                | 2    |         |
| 14      | 67233-98J10 | .HOLDER, DETENT SPRING         | 2    |         |
| 15      | 67287-92E00 | .NUT (M5)                      | 2    |         |
| 16      | 67239-98J00 | .SCREW,DETENT ADJUSTMENT(5X14) | 2    |         |
| 17      | 67223-98J00 | .PAD, BRAKE                    | 2    |         |
| 18      | 67296-98J50 | .SCREW (5X18)                  | 8    |         |
| 19      | 67296-98JA0 | .SCREW (4X10)                  | 2    |         |
| 20      | 67272-98J10 | .GROMMET, REMOCON COVER        | 2    |         |
| 21      | 67252-98J10 | .BUSH, DRIVE SHAFT             | 2    |         |
| 22      | 67288-98J20 | .WASHER                        | 2    |         |
| 23      | 67292-98J00 | .C RING                        | 2    |         |
| 24      | 15980-98J00 | .POTENTIOMETER                 | 2    |         |
| 25      | 67227-98J10 | .LEVER, POTENTIOMETER NO.2     | 1    |         |
| 26      | 37850-98J03 | .SWITCH ASSY, PTT              | 1    |         |
| 27      | 67269-98J01 | .CLAMP, LEAD                   | 1    |         |
| 28      | 67273-98J20 | .PACKING                       | 1    |         |
| 29      | 67296-98J60 | .SCREW (8X30)                  | 2    |         |
| 30      | 67296-98J30 | .SCREW (5X70)                  | 4    |         |
| 31      | 67296-98JG0 | .SCREW (5X14)                  | 2    |         |
| 32      | 67296-98J00 | .SCREW (5X12)                  | 1    |         |
| 33      | 67296-94300 | .SCREW (4X10)                  | 4    |         |
| 34      | 67288-98J40 | .WASHER, BOTTOM COVER          | 14   |         |
| 35      | 67288-98J00 | .WASHER, POTENTIOMETER         | 4    |         |


**FIG. 540A**

This exploded view diagram illustrates the assembly of a vehicle seat. The main components are labeled as follows:

- 1**: Seat backrest
- 2**: Seat cushion
- 3**: Seat base
- 4**: Seat backrest frame
- 5**: Seat backrest cover
- 6**: Seat backrest side panel
- 7**: Seat backrest side panel cover
- 8**: Seat backrest side panel cover
- 9**: Seat backrest side panel cover
- 10**: Seat backrest side panel cover
- 11**: Seat backrest side panel cover
- 12**: Seat backrest side panel cover
- 13**: Seat backrest side panel cover
- 14**: Seat backrest side panel cover
- 15**: Seat backrest side panel cover
- 16**: Seat backrest side panel cover
- 17**: Seat backrest side panel cover
- 18**: Seat backrest side panel cover
- 19**: Seat backrest side panel cover
- 20**: Seat backrest side panel cover
- 21**: Seat backrest side panel cover
- 22**: Seat backrest side panel cover
- 23**: Seat backrest side panel cover
- 24**: Seat backrest side panel cover
- 25**: Seat backrest side panel cover
- 26**: Seat backrest side panel cover
- 27**: Seat backrest side panel cover
- 28**: Seat backrest side panel cover
- 29**: Seat backrest side panel cover
- 30**: Seat backrest side panel cover
- 31**: Seat backrest side panel cover
- 32**: Seat backrest side panel cover
- 33**: Seat backrest side panel cover
- 34**: Seat backrest side panel cover
- 35**: Seat backrest side panel cover
- 36**: Seat backrest side panel cover
- 37**: Seat backrest side panel cover
- 38**: Seat backrest side panel cover
- 39**: Seat backrest side panel cover
- 40**: Seat backrest side panel cover
- 41**: Seat backrest side panel cover
- 42**: Seat backrest side panel cover
- 43**: Seat backrest side panel cover
- 44**: Seat backrest side panel cover
- 45**: Seat backrest side panel cover
- 46**: Seat backrest side panel cover
- 47**: Seat backrest side panel cover
- 48**: Seat backrest side panel cover
- 49**: Seat backrest side panel cover
- 50**: Seat backrest side panel cover
- 51**: Seat backrest side panel cover
- 52**: Seat backrest side panel cover
- 53**: Seat backrest side panel cover
- 54**: Seat backrest side panel cover
- 55**: Seat backrest side panel cover
- 56**: Seat backrest side panel cover
- 57**: Seat backrest side panel cover
- 58**: Seat backrest side panel cover

| REF NO. | PART NO.    | DESCRIPTION                           | QTY | REMARKS |
|---------|-------------|---------------------------------------|-----|---------|
| 36      | 67288-92E20 | .WASHER                               | 2   |         |
| 37      | 67226-98J00 | .BOLT (5X50)                          | 4   |         |
| 38      | 09160-05024 | .WASHER (5.5X16X1.5)                  | 4   |         |
| 39      | 67287-92E00 | .NUT (M5)                             | 4   |         |
| 40      | 67296-98J90 | .SCREW (8X30)                         | 2   |         |
| 41      | 67227-98J00 | .LEVER, POTENTIOMETER NO.1            | 1   |         |
| 42      | 67284-98J10 | .MARK                                 | 1   |         |
| 43      | 67257-98J00 | .MARK, LEVER                          | 2   |         |
| 44      | 67269-98J30 | .BAND                                 | 1   |         |
| 45      | 67288-98J10 | .WASHER, SPRING                       | 16  |         |
| 46      | 67288-98J30 | .WASHER, LEVER COVER                  | 2   |         |
| 47      | 67228-98J50 | .WASHER, WAVE                         | 2   |         |
| 48      | 67211-98J30 | .HOUSING, REMOCON                     | 1   |         |
| 49      | 67222-98J20 | .PANEL ASSY, BACK                     | 1   |         |
| 50      | 67246-98J20 | .SHAFT, DRIVE REMOCON                 | 1   |         |
| 51      | 67273-98J10 | .PACKING, FRONT                       | 1   |         |
| 52      | 67273-98J30 | .PACKING, REAR                        | 1   |         |
| 53      | 67277-98J00 | .GROMMET, REMOCON BOTTOM COVER        | 1   |         |
| 54      | 67296-98JF0 | .BOLT, UPPER COVER (5X14)             | 1   |         |
| 55      | 67297-98J00 | .NUT, UPPER COVER BOLT                | 1   |         |
| 56      | 67237-98J50 | .SPRING, DETENT                       | 2   |         |
| 57      | 36890-98J00 | .HARNES, CONDENSER ADAPTER            | 1   |         |
| 58-1    | 36620-98J31 | WIRE ASSY, REMOTE CONTROL<br>(L:6500) | 1   |         |
| 58-2    | 36620-98J41 | WIRE ASSY, REMOTE CONTROL<br>(L:9500) | 1   |         |

FIG.543A

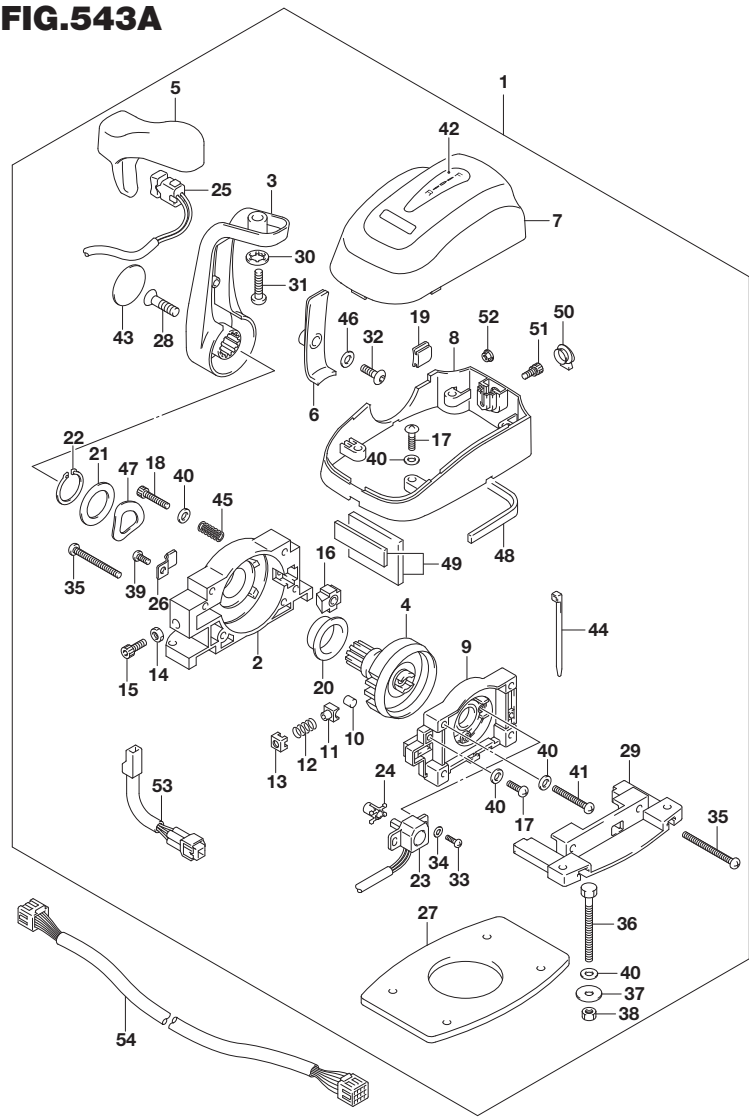

DF140BG\_E11\_021\_543A  
OPT:REMOTE CONTROL ASSY SINGLE


FIG.543A (1-G-6) OPT:REMOTE CONTROL ASSY SINGLE

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 67200-98J06 | REMOTE CONTROL ASSY, SINGLE    | 1    |         |
| 2       | 67211-98J20 | .HOUSING                       | 1    |         |
| 3       | 67251-98J00 | .LEVER, HANDLE                 | 1    |         |
| 4       | 67246-98J10 | .SHAFT, DRIVE REMOCON          | 1    |         |
| 5       | 67261-98J00 | .GRIP, NO.1                    | 1    |         |
| 6       | 67263-98J00 | .COVER, LEVER                  | 1    |         |
| 7       | 67212-98J20 | .COVER, REMOCON UPPER          | 1    | UPPER   |
| 8       | 67271-98J30 | .COVER, REMOCON BOTTOM         | 1    |         |
| 9       | 67222-98J10 | .PANEL ASSY, BACK              | 1    |         |
| 10      | 67236-98J10 | .ROLLER, DETENT                | 1    |         |
| 11      | 67235-98J10 | .GUIDE, DETENT ROLLER          | 1    |         |
| 12      | 67237-98J30 | .SPRING, DETENT                | 1    |         |
| 13      | 67233-98J10 | .HOLDER, DETENT SPRING         | 1    |         |
| 14      | 67287-92E00 | .NUT (M5)                      | 1    |         |
| 15      | 67239-98J00 | .SCREW,DETENT ADJUSTMENT(5X14) | 1    |         |
| 16      | 67223-98J00 | .PAD, BRAKE                    | 1    |         |
| 17      | 67296-98J50 | .SCREW (5X18)                  | 6    |         |
| 18      | 67296-98JA0 | .SCREW (4X10)                  | 1    |         |
| 19      | 67272-98J10 | .GROMMET, REMOCON COVER        | 1    |         |
| 20      | 67252-98J10 | .BUSH, DRIVE SHAFT             | 1    |         |
| 21      | 67288-98J20 | .WASHER                        | 1    |         |
| 22      | 67292-98J00 | .C RING                        | 1    |         |
| 23      | 15980-98J00 | .POTENTIOMETER                 | 1    |         |
| 24      | 67227-98J10 | .LEVER, POTENTIOMETER NO.2     | 1    |         |
| 25      | 37850-98J03 | .SWITCH ASSY, PTT              | 1    |         |
| 26      | 67269-98J01 | .CLAMP, LEAD                   | 1    |         |
| 27      | 67273-98J00 | .PACKING                       | 1    |         |
| 28      | 67296-98J60 | .SCREW (8X30)                  | 1    |         |
| 29      | 67274-98J00 | .FLANGE, BASE                  | 1    |         |
| 30      | 67288-92E20 | .WASHER                        | 1    |         |
| 31      | 67296-98J90 | .SCREW (8X30)                  | 1    |         |
| 32      | 67296-98JG0 | .SCREW (5X14)                  | 1    |         |
| 33      | 67296-94300 | .SCREW (4X10)                  | 2    |         |
| 34      | 67288-98J00 | .WASHER, POTENTIOMETER         | 2    |         |
| 35      | 67296-98J20 | .SCREW (5X50)                  | 2    |         |

DF140BG\_E11\_021



FIG.543A

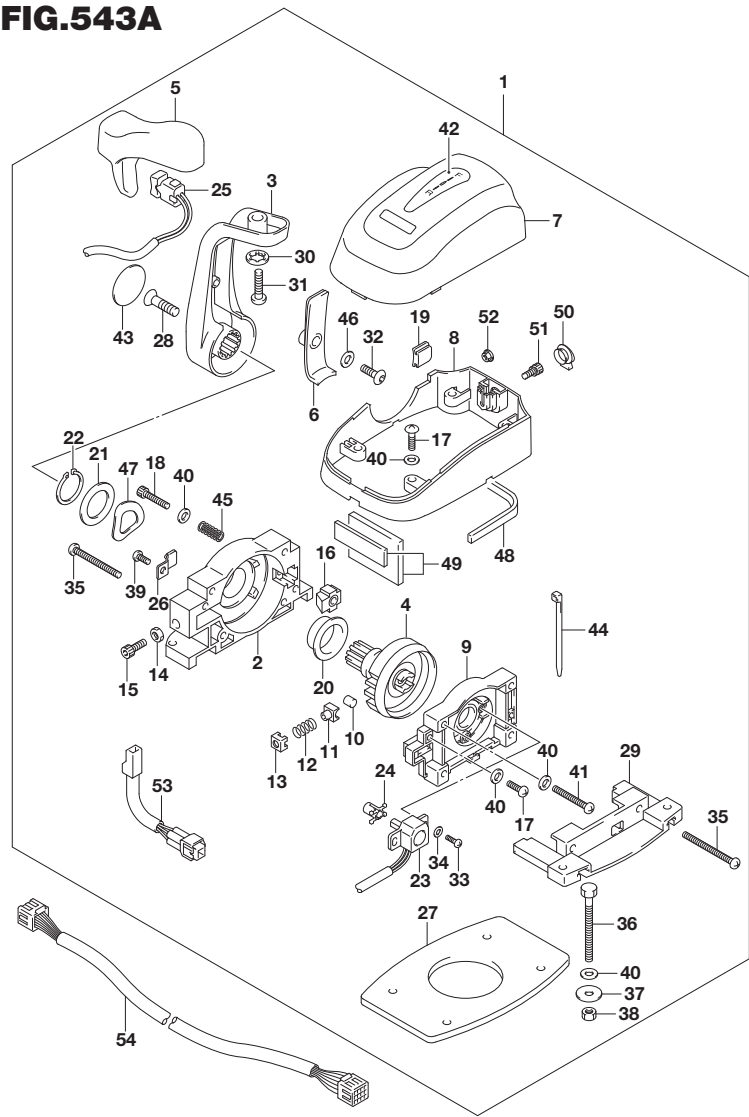


DF140BG\_E11\_021\_543A  
OPT:REMOTE CONTROL ASSY SINGLE

FIG.543A (1-G-7) OPT:REMOTE CONTROL ASSY SINGLE

| REF NO. | PART NO.    | DESCRIPTION                           | Q'TY | REMARKS |
|---------|-------------|---------------------------------------|------|---------|
| 36      | 67226-98J00 | .BOLT (5X50)                          | 4    |         |
| 37      | 09160-05024 | .WASHER (5.5X16X1.5)                  | 4    |         |
| 38      | 67287-92E00 | .NUT (M5)                             | 4    |         |
| 39      | 67296-98J00 | .SCREW (5X12)                         | 1    |         |
| 40      | 67288-98J40 | .WASHER, BOTTOM COVER                 | 12   |         |
| 41      | 67296-98J10 | .SCREW (5X35)                         | 1    |         |
| 42      | 67284-98J10 | .MARK                                 | 1    |         |
| 43      | 67257-98J00 | .MARK, LEVER                          | 1    |         |
| 44      | 67269-98J30 | .BAND                                 | 1    |         |
| 45      | 67288-98J10 | .WASHER, SPRING                       | 8    |         |
| 46      | 67288-98J30 | .WASHER, LEVER COVER                  | 1    |         |
| 47      | 67228-98J50 | .WASHER, WAVE                         | 1    |         |
| 48      | 67273-98J10 | .PACKING, FRONT                       | 1    |         |
| 49      | 67273-98J30 | .PACKING, REAR                        | 1    |         |
| 50      | 67277-98J00 | .GROMMET, REMOCON BOTTOM COVER        | 1    |         |
| 51      | 67296-98JF0 | .BOLT, UPPER COVER (5X14)             | 1    |         |
| 52      | 67297-98J00 | .NUT, UPPER COVER BOLT                | 1    |         |
| 53      | 36890-98J00 | .HARNES, CONDENSER ADAPTER            | 1    |         |
| 54-1    | 36620-98J31 | WIRE ASSY, REMOTE CONTROL<br>(L:6500) | 1    |         |
| 54-2    | 36620-98J41 | WIRE ASSY, REMOTE CONTROL<br>(L:9500) | 1    |         |

FIG.585A

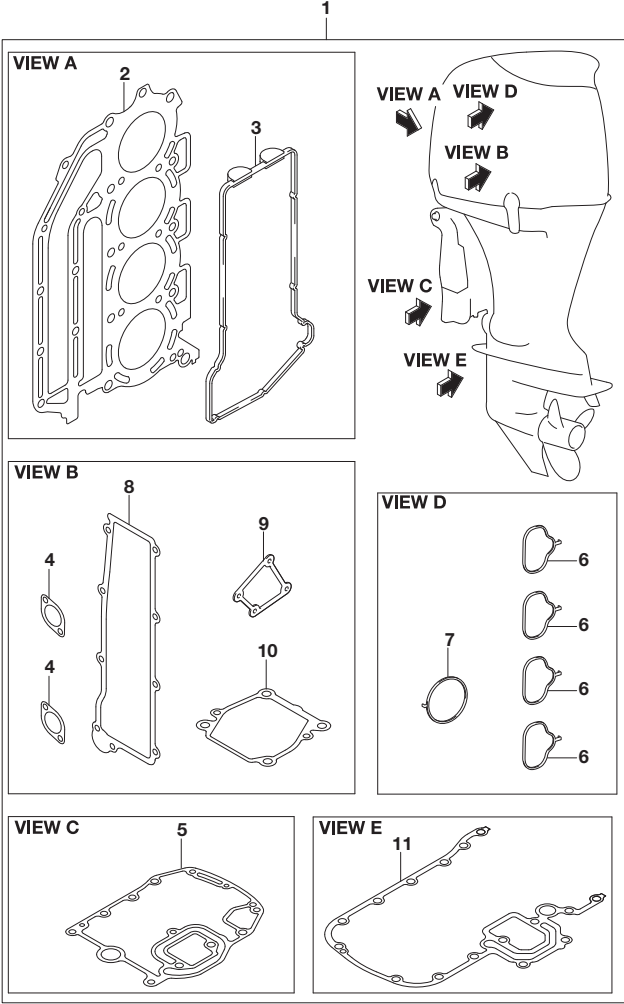


DF140BG\_E11\_021\_585A  
OPT:GASKET SET

FIG.585A (1-G-8) OPT:GASKET SET

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 11400-99840 | GASKET SET                     | 1    |         |
| 2       | 11141-99L00 | .GASKET,CYLINDER HEAD          | 1    |         |
| 3       | 11189-90J00 | .GASKET,CYLINDER HEAD COVER    | 1    |         |
| 4       | 11265-87E10 | .GASKET,PROTECTION COVER       | 2    |         |
| 5       | 11489-90J10 | .GASKET,OIL PAN                | 1    |         |
| 6       | 13119-99L00 | .GASKET,INTAKE MANIFOLD        | 4    |         |
| 7       | 13125-99L00 | .GASKET,THROTTLE BODY          | 1    |         |
| 8       | 14151-90J00 | .GASKET,RECT & REGULATOR       | 1    |         |
| 9       | 16941-99L00 | .GASKET,OIL LVL GAGE GUIDE CAS | 1    |         |
| 10      | 17472-87E10 | .GASKET,PUMP CASE PANEL        | 1    |         |
| 11      | 51211-90J30 | .GASKET,ENGINE HOLDER          | 1    |         |

DF140BG\_E11\_021

FIG.601A

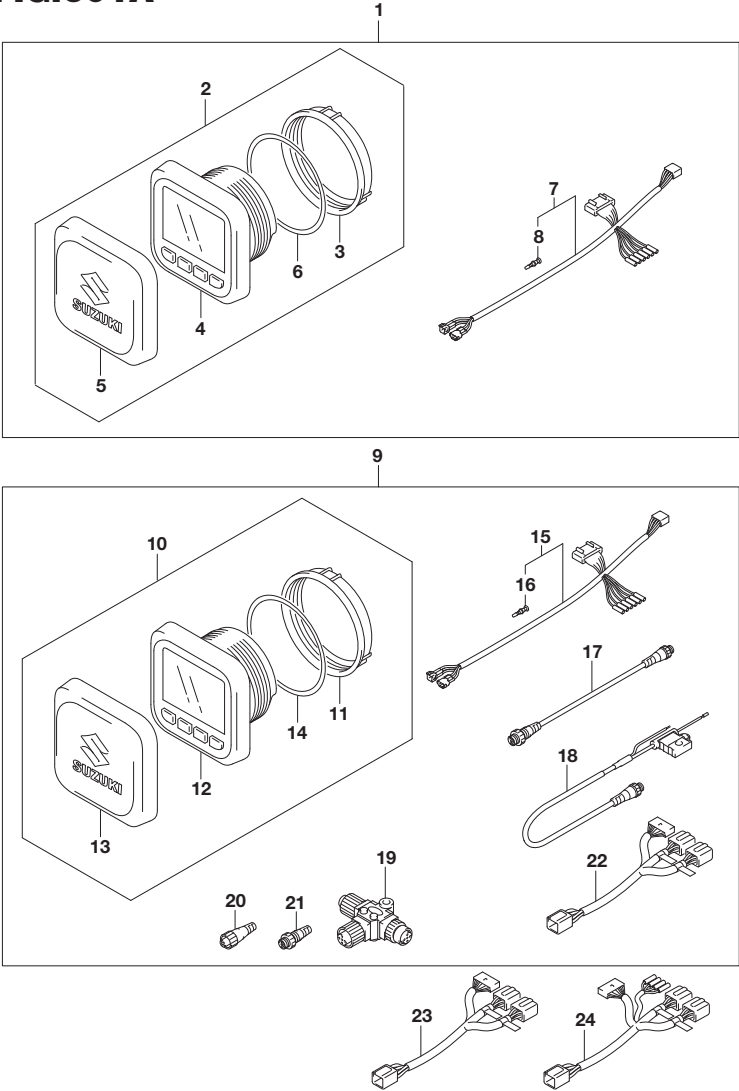

DF140BG\_E11\_021\_601A  
OPT:MULTI FUNCTION GAUGE (1)

FIG.601A (1-G-9) OPT:MULTI FUNCTION GAUGE (1)

| REF NO. | PART NO.    | DESCRIPTION                  | Q'TY | REMARKS |
|---------|-------------|------------------------------|------|---------|
| 1       | 34000-96L65 | KIT, SINGLE GAUGE ELECTRIC   | 1    |         |
| 2       | 34011-96L15 | .GAUGE SET, MULTI            | 1    |         |
| 3       | 34112-96L00 | ..NUT, GAUGE                 | 1    |         |
| 4       | 34193-96L00 | ..BEZEL, GAUGE               | 1    |         |
| 5       | 34211-96L00 | ..COVER, GAUGE               | 1    |         |
| 6       | 34825-96L00 | ..PACKING, GAUGE             | 1    |         |
| 7       | 36661-96L20 | .ADAPTER, GAUGE              | 1    |         |
| 8       | 36615-96300 | ..TERMINAL                   | 5    |         |
| 9       | 34000-96L75 | KIT, DUAL GAUGE ELECTRIC     | 1    |         |
| 10      | 34011-96L15 | .GAUGE SET, MULTI            | 2    |         |
| 11      | 34112-96L00 | ..NUT, GAUGE                 | 2    |         |
| 12      | 34193-96L00 | ..BEZEL, GAUGE               | 2    |         |
| 13      | 34211-96L00 | ..COVER, GAUGE               | 2    |         |
| 14      | 34825-96L00 | ..PACKING, GAUGE             | 2    |         |
| 15      | 36661-96L20 | .ADAPTER, GAUGE              | 1    |         |
| 16      | 36615-96300 | ..TERMINAL                   | 5    |         |
| 17      | 36662-88L10 | .WIRE, 2 EXTENSION           | 2    |         |
| 18      | 36663-88L00 | .HARNESS ASSY, NETWORK POWER | 1    |         |
| 19      | 36664-88L00 | .CONNECTOR, BRANCH           | 2    |         |
| 20      | 36665-88L00 | .UNIT, RESISTOR FEMALE       | 1    |         |
| 21      | 36665-88L10 | .UNIT, RESISTOR MALE         | 1    |         |
| 22      | 36667-96L00 | .WIRE, GAUGE ADAPTER         | 1    |         |
| 23      | 36667-96L11 | WIRE, DUAL GAUGE ADAPTER     | 1    |         |
| 24      | 36667-96L30 | WIRE, GAUGE ADAPTER          | 1    |         |

DF140BG\_E11\_021

FIG.602A

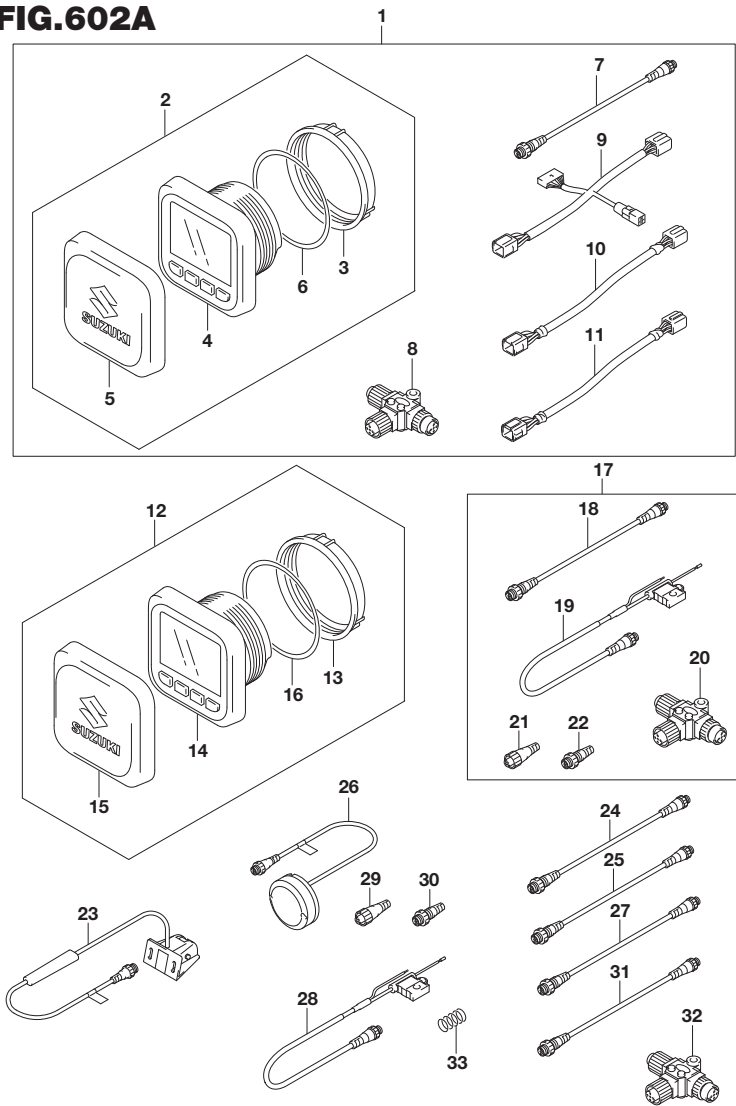


FIG.602A (1-G-10) OPT:MULTI FUNCTION GAUGE (2)

| REF NO. | PART NO.    | DESCRIPTION                    | Q'TY | REMARKS |
|---------|-------------|--------------------------------|------|---------|
| 1       | 34002-96L15 | KIT, DUAL STATION              | 1    |         |
| 2       | 34011-96L15 | .GAUGE SET, MULTI              | 1    |         |
| 3       | 34112-96L00 | .NUT, GAUGE                    | 1    |         |
| 4       | 34193-96L00 | .BEZEL, GAUGE                  | 1    |         |
| 5       | 34211-96L00 | .COVER, GAUGE                  | 1    |         |
| 6       | 34825-96L00 | .PACKING, GAUGE                | 1    |         |
| 7       | 36662-88L10 | .WIRE, 2 EXTENSION             | 1    |         |
| 8       | 36664-88L00 | .CONNECTOR, BRANCH             | 1    |         |
| 9       | 36665-96L00 | .ADAPTER, DUAL STATION         | 1    |         |
| 10      | 36666-96L00 | .ADAPTER, GAUGE POWER          | 1    |         |
| 11      | 36682-92E00 | .WIRE, TRIM METER EXT (L:6500) | 1    |         |
| 12      | 34011-96L15 | GAUGE SET, MULTI               | 1    |         |
| 13      | 34112-96L00 | .NUT, GAUGE                    | 1    |         |
| 14      | 34193-96L00 | .BEZEL, GAUGE                  | 1    |         |
| 15      | 34211-96L00 | .COVER, GAUGE                  | 1    |         |
| 16      | 34825-96L00 | .PACKING, GAUGE                | 1    |         |
| 17      | 36001-88L00 | SET, WIRE                      | 1    |         |
| 18      | 36662-88L10 | .WIRE, 2 EXTENSION             | 1    |         |
| 19      | 36663-88L00 | .HARNESS ASSY, NETWORK POWER   | 1    |         |
| 20      | 36664-88L00 | .CONNECTOR, BRANCH             | 1    |         |
| 21      | 36665-88L00 | .UNIT, RESISTOR FEMALE         | 1    |         |
| 22      | 36665-88L10 | .UNIT, RESISTOR MALE           | 1    |         |
| 23      | 34190-88L00 | SENSOR ASSY, PAD WHEEL         | 1    |         |
| 24      | 36662-88L20 | WIRE, 6 EXTENSION              | 1    |         |
| 25      | 36662-88L30 | WIRE, 15 EXTENSION             | 1    |         |
| 26      | 39950-88L02 | MODULE ASSY, GPS RECEIVER      | 1    |         |
| 27      | 36662-88L00 | WIRE, 25 EXTENSION             | 1    |         |
| 28      | 36663-88L00 | HARNESS ASSY, NETWORK POWER    | 1    |         |
| 29      | 36665-88L00 | UNIT, RESISTOR FEMALE          | 1    |         |
| 30      | 36665-88L10 | UNIT, RESISTOR MALE            | 1    |         |
| 31      | 36662-88L10 | WIRE, 2 EXTENSION              | 1    |         |
| 32      | 36664-88L00 | CONNECTOR, BRANCH              | 1    |         |
| 33      | 67237-98J20 | SPRING, DETENT                 | 1    |         |

| PART NO. | FIG.NO.-REF.NO. | PART NO.        | FIG.NO.-REF.NO. | PART NO.        | FIG.NO.-REF.NO. |
|----------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 10000    |                 | 12163-35F00     | 116A-6          | 12892-69G10-275 | 121A-4-24       |
|          |                 | 12220-99L00     | 116A-9          | 12892-69G10-278 | 121A-4-25       |
|          |                 | 12300-85830     | 116A-12-1       | 12892-69G10-280 | 121A-4-26       |
|          |                 | 12300-85830-012 | 116A-12-2       | 12892-69G10-283 | 121A-4-27       |
|          |                 | 12300-85854-0AA | 116A-11-6       | 12892-69G10-285 | 121A-4-28       |
|          | 11100-99L00     | 111A-1          | 12300-85854-0BA | 116A-11-7       | 12892-69G10-288 |
|          | 11112-90J00     | 113A-10         | 12300-85854-0CA | 116A-11-8       | 12892-69G10-290 |
|          | 11115-85FA1-001 | 111A-4          | 12300-85854-0DA | 116A-11-9       | 12892-69G10-293 |
|          | 11117-89J00     | 111A-10         | 12300-85854-0EA | 116A-11-10      | 12892-69G10-295 |
|          | 11117-90J10     | 113A-4          | 12340-85FB3-0A0 | 116A-11-1       | 12892-69G10-298 |
|          | 11118-95J00     | 204A-1          | 12340-85FB3-0B0 | 116A-11-2       | 12892-69G10-300 |
|          | 11141-99L00     | 111A-11         | 12340-85FB3-0C0 | 116A-11-3       | 12911-86FA2     |
|          |                 | 585A-2          | 12340-85FB3-0D0 | 116A-11-4       | 12915-86F51     |
|          | 11170-99L00     | 111A-14         | 12340-85FB3-0E0 | 116A-11-5       | 12921-90J01     |
|          | 11173-99L00     | 111A-15         | 12632-92J12     | 175A-1          | 12931-90J00     |
|          | 11174-99L00     | 111A-19         | 12711-99L00     | 121A-1          | 12932-85FA0     |
|          | 11179-90J00     | 111A-16         | 12720-99L00     | 121A-2          | 12933-86S10     |
|          | 11189-90J00     | 111A-17         | 12732-90J01     | 119A-1          | 13110-99L00     |
|          |                 | 585A-3          | 12733-90J00     | 119A-4          | 13119-99L00     |
|          | 11194-99L00     | 111A-21         | 12741-90J01     | 119A-2          | 585A-6          |
|          | 11196-99L00     | 162A-1          | 12761-90J10     | 119A-9          | 13125-99L00     |
|          | 11216-90J10     | 113A-5          | 12771-90J00     | 119A-10         | 585A-7          |
|          | 11241-73003     | 175A-15         | 12810-90J00     | 119A-11         | 13300-99L00     |
|          | 11261-87E10     | 310A-3          | 12812-90J00     | 119A-13         | 13315-99L00     |
|          | 11261-93J00     | 111A-5          | 12813-73G00     | 119A-12         | 13370-99L00     |
|          |                 | 113A-12         | 12831-90J02     | 119A-14         | 13370-99L10     |
|          | 11265-87E10     | 310A-4          | 12891-69G00     | 121A-3          | 13575-40F00     |
|          |                 | 585A-4          | 12892-69G10-218 | 121A-4-1        | 13580-98J03     |
|          | 11291-99L00     | 113A-1          | 12892-69G10-220 | 121A-4-2        | 13614-89J00     |
|          | 11301-99L00     | 113A-3          | 12892-69G10-223 | 121A-4-3        | 13614-93J00     |
|          | 11382-93J00     | 111A-18         | 12892-69G10-225 | 121A-4-4        | 13650-52G00     |
|          | 11400-99840     | 585A-1          | 12892-69G10-228 | 121A-4-5        | 13655-87J01     |
|          | 11489-90J10     | 180A-1          | 12892-69G10-230 | 121A-4-6        | 13684-99L00     |
|          |                 | 585A-5          | 12892-69G10-233 | 121A-4-7        | 143B-11         |
|          | 11501-90J20-QTN | 180A-2-2        | 12892-69G10-235 | 121A-4-8        | 13710-99E00     |
|          | 11501-90J20-YAY | 180A-2-1        | 12892-69G10-238 | 121A-4-9        | 13810-99L00     |
|          | 11511-99L00     | 136A-1          | 12892-69G10-240 | 121A-4-10       | 13813-99L00     |
|          | 11512-99L00     | 136A-4          | 12892-69G10-243 | 121A-4-11       | 14151-90J00     |
|          | 11514-99L00     | 136A-2          | 12892-69G10-245 | 121A-4-12       | 585A-8          |
|          | 11515-99L00     | 136A-5          | 12892-69G10-248 | 121A-4-13       | 15100-96J01     |
|          | 11959-15HA1     | 420A-17         | 12892-69G10-250 | 121A-4-14       | 15100-96J11     |
|          | 12100-92840-025 | 116A-8-2        | 12892-69G10-253 | 121A-4-15       | 15190-99L00     |
|          | 12100-92841-0A0 | 116A-8-1        | 12892-69G10-255 | 121A-4-16       | 15192-99L00     |
|          | 12100-98840-025 | 116A-8-3        | 12892-69G10-258 | 121A-4-17       | 15193-99L00     |
|          | 12100-99L00-050 | 116A-14         | 12892-69G10-260 | 121A-4-18       | 15195-96L00     |
|          | 12111-99L00     | 116A-1          | 12892-69G10-263 | 121A-4-19       | 15195-96L10     |
|          | 12140-92J10     | 116A-2          | 12892-69G10-265 | 121A-4-20       | 15200-92J20     |
|          | 12140-92J10-050 | 116A-15         | 12892-69G10-268 | 121A-4-21       | 15200-92J30     |
|          | 12151-99L00     | 116A-3          | 12892-69G10-270 | 121A-4-22       | 15410-92J10     |
|          | 12160-92J10     | 116A-5          | 12892-69G10-273 | 121A-4-23       | 15411-92J10     |

| PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 15412-92J00 | 146A-8          | 15681-99L00 | 144A-1          |             | 160B-5-1        |
| 15413-92J00 | 146A-9          |             | 144B-1          | 17561-90J13 | 160A-5-2        |
| 15415-92J00 | 146A-10         | 15691-92J00 | 143A-30         |             | 160B-5-2        |
| 15421-99L00 | 146A-11         |             | 143B-30         | 17562-90J01 | 160A-6          |
| 15423-99L00 | 144A-4          | 15710-99L00 | 144A-2          |             | 160B-6          |
|             | 144B-4          |             | 144B-2          | 17563-87D01 | 160A-7          |
| 15600-99L00 | 143A-1          | 15716-65D10 | 144A-3          |             | 160A-24         |
| 15600-99L10 | 143B-1          |             | 144B-3          |             | 160B-7          |
| 15610-92J00 | 143A-27         | 15751-99L00 | 144A-5          |             | 160B-24         |
|             | 143B-27         |             | 144B-5          | 17564-87D00 | 160A-8          |
| 15612-88L00 | 143A-21         | 15760-88L00 | 143A-12         |             | 160B-8          |
|             | 143B-21         |             | 143B-12         | 17581-99L00 | 162A-14         |
| 15613-88L00 | 143A-22         | 15762-90J00 | 144B-7          |             | 162A-2          |
|             | 143B-22         | 15830-90J00 | 144B-10         | 17612-90J01 | 160A-20         |
| 15613-92J00 | 143A-25         | 15831-96L00 | 146A-16         |             | 160B-20         |
|             | 143B-25         | 15980-98J00 | 520A-41         | 17631-90J00 | 160A-9          |
| 15614-88L00 | 143A-23         |             | 540A-24         |             | 160B-9          |
|             | 143B-23         |             | 543A-23         | 17632-90J00 | 160A-10         |
| 15620-99L00 | 143A-26         | 16113-92J11 | 175A-2          |             | 160B-10         |
| 15620-99L10 | 143B-26         | 16400-99L00 | 175A-3          | 17635-87E00 | 160A-25         |
| 15626-92J01 | 143A-4          | 16440-99E00 | 175A-4          |             | 160B-25         |
| 15626-92J10 | 143B-4          | 16510-61A31 | 175A-14         | 17635-90J00 | 160A-11         |
| 15628-99E00 | 143A-5          | 16520-90J00 | 175A-5          |             | 160B-11         |
|             | 143B-5          | 16531-99L00 | 175A-16         | 17660-98L01 | 162A-3          |
| 15629-99E10 | 143A-6          | 16539-99L00 | 175A-17         | 17670-90J01 | 162A-4-1        |
|             | 143B-6          | 16910-99L00 | 180A-13         | 17670-90J11 | 162A-4-2        |
| 15641-88L00 | 143A-7          | 16930-99L00 | 180A-14         | 17681-99L00 | 162A-5          |
| 15641-88L10 | 143B-7          | 16934-99L00 | 180A-17         | 17710-99L00 | 162A-13         |
| 15641-88L31 | 143A-18         | 16941-99L00 | 180A-18         | 17711-90J00 | 162A-6          |
|             | 143B-18         |             | 585A-9          | 17712-99L00 | 162A-10         |
| 15641-88L51 | 143A-19         | 17400-92J11 | 160B-21         | 17913-93J00 | 180A-3          |
|             | 143B-19         | 17400-92J23 | 160A-21         |             | 410A-10         |
| 15642-88L00 | 143A-8          | 17410-92J00 | 160A-1          | 17914-93J01 | 180A-12         |
|             | 143B-8          |             | 160B-1          |             | 410A-11         |
| 15642-88L10 | 143A-20         | 17413-92J01 | 160A-18         | 17915-99L00 | 162A-12         |
|             | 143B-20         | 17413-92J11 | 160B-18         | 17917-87L00 | 410A-30         |
| 15643-88L10 | 143A-17         | 17416-92J11 | 160A-19         |             | 507A-8          |
|             | 143B-17         |             | 160B-19         | 18213-98J30 | 315A-7          |
| 15644-88L00 | 143A-13         | 17461-90J01 | 160A-2          | 18498-99EA1 | 507A-6          |
| 15644-88L10 | 143B-13         |             | 160B-2          | 18590-59S00 | 315A-3          |
| 15645-88L00 | 143A-14         | 17471-92J00 | 160A-3          | 18640-98L01 | 315A-5          |
|             | 143B-14         | 17471-92J10 | 160B-3          | 19110-99L00 | 204A-2          |
| 15648-92J00 | 143A-16         | 17472-87E10 | 160A-4          |             |                 |
|             | 143B-16         |             | 160B-4          |             |                 |
| 15650-99E00 | 143A-9          |             | 585A-10         |             |                 |
|             | 143B-9          | 17500-90J11 | 160A-22         |             |                 |
| 15654-88L00 | 143A-10         |             | 160B-22         |             |                 |
|             | 143B-10         | 17520-90J00 | 160A-23         |             |                 |
| 15660-99L00 | 143A-31         |             | 160B-23         |             |                 |
|             | 143B-31         | 17561-90J03 | 160A-5-1        |             |                 |

20000

| PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 21110-99L00 | 204A-3          | 31135-94900 | 340A-7          |             | 602A-3          |
| 21151-99L00 | 204A-4          | 31136-90J20 | 340A-8          |             | 602A-13         |
| 21155-99L00 | 204A-5          | 31150-92J00 | 301A-2          | 34190-88L00 | 602A-23         |
| 21210-99L00 | 204A-6          | 31170-92J00 | 301A-3          | 34193-96L00 | 601A-4          |
| 21230-99L00 | 204A-7          | 31173-92J00 | 301A-4          |             | 601A-12         |
| 21241-99L00 | 204A-8          | 31173-94920 | 340A-3          |             | 602A-4          |
| 22511-99011 | 204A-9          | 31191-92J00 | 301A-5          |             | 602A-14         |
|             | 336A-1          | 31192-92J00 | 301A-6          | 34211-96L00 | 601A-5          |
| 23111-90J02 | 204A-10-1       | 31220-92J00 | 301A-7          |             | 601A-13         |
| 23111-90J12 | 204A-10-2       | 31261-75F10 | 301A-8          |             | 602A-5          |
| 23115-99L00 | 204A-11         | 31281-92J10 | 337A-3          |             | 602A-15         |
| 25111-92J00 | 210A-6-1        |             | 337B-3          | 34660-90J04 | 507A-1          |
|             | 210B-6-1        | 31311-63J00 | 301A-9          | 34825-96L00 | 601A-6          |
| 25111-92J10 | 210A-6-2        | 31311-94900 | 340A-10         |             | 601A-14         |
|             | 210B-6-2        | 31312-92J00 | 301A-11         |             | 602A-6          |
| 25131-92J01 | 210A-1          | 31320-92J00 | 301A-12         |             | 602A-16         |
|             | 210B-1          | 31340-92J00 | 301A-10         | 34830-87J20 | 315A-4          |
| 25141-92J01 | 210A-2          | 31341-92J00 | 301A-13         | 34840-98J03 | 315A-6          |
|             | 210B-2          | 31343-63J00 | 301A-14         | 34841-92J00 | 315A-8          |
| 25222-90J01 | 210A-3          | 31344-63J00 | 301A-15         | 34842-92J01 | 315A-9          |
|             | 210B-3          | 31912-90J00 | 301A-16         | 34843-87L00 | 315A-10         |
| 25232-90J00 | 210A-4          | 31918-92J01 | 301A-17         | 34845-92J00 | 315A-13         |
|             | 210B-4          | 32102-99L00 | 303A-1          | 34846-87L00 | 315A-11         |
| 25321-92J10 | 210A-5          | 32120-99L00 | 303A-2          | 34923-96L01 | 322A-32         |
| 25321-92J20 | 210B-5          | 32160-99L00 | 303A-3          | 36001-88L00 | 602A-17         |
| 25700-92J00 | 407A-30         | 32800-99L00 | 310A-10         | 36610-99L00 | 322A-7          |
|             | 407B-26         | 32851-93J00 | 331A-1          | 36611-99L00 | 322A-25         |
|             | 407C-28         |             | 535A-19         | 36612-96J01 | 322A-21         |
|             | 407D-24         | 32890-99L00 | 310A-11         | 36612-98J20 | 522A-2          |
| 29103-93J00 | 315A-21         | 32980-38F00 | 331A-2          | 36615-96300 | 331A-4          |
| 29116-93J00 | 210A-8          |             | 535A-12         |             | 522A-9          |
|             | 210B-8          | 33220-64L10 | 303A-4          |             | 522A-16         |
| 29117-93J10 | 401A-15         | 33410-99L00 | 310A-1          |             | 522A-19         |
| 29404-93J01 | 337A-2          | 33634-96J00 | 322A-8          |             | 522A-21         |
|             | 337B-2          | 33799-97E00 | 340A-9          |             | 523A-4          |
| 29404-93J11 | 310A-17         | 33810-90J30 | 322A-1          |             | 535A-14         |
|             |                 | 33911-88BL0 | 522A-5          |             | 601A-8          |
|             |                 | 33920-99L00 | 326A-21         |             | 601A-16         |
|             |                 | 33925-93J00 | 522A-6          | 36616-99L00 | 322A-3          |
|             |                 | 33925-99L00 | 326A-22         | 36616-99L10 | 322A-4          |
|             |                 | 33926-98J00 | 522A-7          | 36616-99L20 | 310A-8          |
|             |                 | 34000-96L65 | 601A-1          | 36617-87L20 | 326A-3          |
|             |                 | 34000-96L75 | 601A-9          | 36617-88L00 | 310A-9          |
|             |                 | 34002-96L15 | 602A-1          |             | 322A-19         |
|             |                 | 34011-96L15 | 601A-2          | 36617-93J00 | 143A-32         |
| 31100-92J00 | 301A-1          |             | 601A-10         |             | 143B-32         |
| 31111-94900 | 340A-2          |             | 602A-2          |             | 303A-5          |
| 31123-94910 | 340A-4          |             | 602A-12         |             | 322A-24         |
| 31133-90J10 | 340A-5          | 34112-96L00 | 601A-3          | 36617-93J10 | 143A-33         |
| 31133-94910 | 340A-6          |             | 601A-11         |             | 143B-33         |

30000

| PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|
|             | 303A-12         | 36667-96L11 | 601A-23         | 37141-99E80 | 530A-3-11       |
|             | 315A-18         | 36667-96L20 | 522A-4          | 37141-99E90 | 530A-3-12       |
|             | 322A-20         | 36667-96L30 | 601A-24         | 37141-99EA0 | 530A-3-1        |
| 36618-43410 | 322A-9          | 36682-92E00 | 602A-11         | 37141-99EB0 | 530A-3-2        |
| 36620-98J31 | 540A-58-1       | 36770-98J13 | 522A-10-1       | 37143-96L00 | 535A-4          |
|             | 543A-54-1       | 36770-98J22 | 522A-10-2       | 37143-99E01 | 530A-4          |
| 36620-98J41 | 540A-58-2       | 36775-98J00 | 522A-11         | 37170-96L04 | 535A-21-1       |
|             | 543A-54-2       | 36776-98J00 | 522A-12         | 37170-96L14 | 535A-21-2       |
| 36620-98J51 | 522A-1          | 36890-98J00 | 520A-55         | 37171-96L02 | 331A-7-1        |
| 36621-98J00 | 522A-17         |             | 540A-57         |             | 535A-23-1       |
| 36621-98J10 | 522A-22         |             | 543A-53         | 37171-96L12 | 331A-7-2        |
| 36622-98J00 | 522A-13         | 36894-87D00 | 336A-3          |             | 535A-23-2       |
| 36623-96L02 | 331A-3          |             | 337A-33         | 37172-96L01 | 331A-8-1        |
|             | 535A-13         |             | 337B-33         |             | 535A-24-1       |
| 36623-98J21 | 522A-8          | 36894-95201 | 336A-2          | 37172-96L10 | 331A-8-2        |
| 36623-98J30 | 522A-18         | 36895-87D10 | 336A-9          |             | 535A-24-2       |
| 36623-98J40 | 523A-3          |             | 337A-35         | 37173-96L00 | 535A-27         |
| 36624-98J02 | 522A-15         |             | 337B-35         | 37173-96L10 | 331A-9          |
| 36624-98J11 | 522A-20         | 36990-87D00 | 522A-3          |             | 535A-16         |
| 36625-98J10 | 523A-1          | 37100-96L02 | 535A-1          | 37721-93J00 | 326A-4          |
| 36627-98J00 | 523A-5          | 37100-98J07 | 530A-1          | 37724-99L00 | 326A-5          |
| 36661-96L20 | 601A-7          | 37100-98J11 | 530A-11         | 37726-99L00 | 326A-6          |
|             | 601A-15         | 37100-98J21 | 530A-20         | 37803-93J06 | 530A-14         |
| 36662-88L00 | 602A-27         | 37100-98J31 | 530A-22         | 37820-93J11 | 530A-6          |
| 36662-88L10 | 601A-17         | 37105-96L04 | 535A-11         |             | 530A-15         |
|             | 602A-7          | 37110-96L00 | 535A-2          |             | 535A-7          |
|             | 602A-18         | 37110-98J02 | 530A-2          | 37820-99E02 | 315A-12         |
|             | 602A-31         | 37112-98J00 | 530A-12         | 37823-92E02 | 530A-7          |
| 36662-88L20 | 602A-24         | 37112-98J10 | 530A-21         |             | 530A-16         |
| 36662-88L30 | 602A-25         |             | 530A-23         |             | 535A-8          |
| 36662-96L01 | 331A-5          | 37114-98J00 | 530A-10         | 37825-99E10 | 530A-18         |
|             | 535A-15         |             | 535A-5          | 37826-92J10 | 530A-8          |
| 36663-88L00 | 601A-18         | 37117-96L00 | 331A-6          |             | 530A-17         |
|             | 602A-19         |             | 535A-22         |             | 535A-9          |
|             | 602A-28         | 37139-96L30 | 535A-6          | 37850-92J00 | 326A-7          |
| 36663-96L00 | 535A-25         | 37139-98J10 | 530A-5          | 37850-98J03 | 520A-52         |
| 36664-88L00 | 601A-19         | 37141-99E00 | 530A-3-3        |             | 540A-26         |
|             | 602A-8          |             | 535A-3-1        |             | 543A-25         |
|             | 602A-20         | 37141-99E10 | 530A-3-4        | 37856-92J00 | 326A-8          |
|             | 602A-32         |             | 535A-3-2        | 37857-92J01 | 326A-9          |
| 36664-96L00 | 535A-26         | 37141-99E20 | 530A-3-5        | 37860-87L00 | 530A-24         |
| 36665-88L00 | 601A-20         |             | 535A-3-3        | 37862-87L00 | 530A-25         |
|             | 602A-21         | 37141-99E30 | 530A-3-6        | 38100-96J12 | 337A-4          |
|             | 602A-29         |             | 535A-3-4        |             | 337B-4          |
| 36665-88L10 | 601A-21         | 37141-99E40 | 530A-3-7        |             | 340A-1          |
|             | 602A-22         |             | 535A-3-5        | 38410-93J21 | 326A-19         |
|             | 602A-30         | 37141-99E50 | 530A-3-8        | 38415-93J20 | 326A-20         |
| 36665-96L00 | 602A-9          |             | 535A-3-6        | 38500-93J90 | 331A-10         |
| 36666-96L00 | 602A-10         | 37141-99E60 | 530A-3-9        |             | 530A-27         |
| 36667-96L00 | 601A-22         | 37141-99E70 | 530A-3-10       |             | 535A-17         |

| PART NO.        | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. | PART NO.        | FIG.NO.-REF.NO. |
|-----------------|-----------------|-------------|-----------------|-----------------|-----------------|
| 38860-76F01     | 322A-13         | 48321-87D03 | 337A-26         | 51110-99810-Y5S | 401A-1-2        |
|                 | 322A-14         |             | 337B-26         | 51110-99810-YAY | 401A-1-1        |
|                 | 326A-30         | 48326-95E00 | 337A-27         | 51115-90J00     | 401A-8          |
| 38860-96L01     | 331A-11         |             | 337B-27         | 51122-90J00     | 401A-18         |
|                 | 535A-18         | 48401-96J02 | 337A-7          | 51123-90J01     | 401A-19         |
| 38890-99L00     | 326A-23         |             | 337B-7          | 51211-90J30     | 401A-9          |
| 38892-98J01     | 326A-24         | 48405-93J00 | 337A-14         |                 | 585A-11         |
| 38895-99L00     | 326A-25         |             | 337B-14         | 52111-90J02-QTN | 405A-1-2        |
| 38915-90J00     | 326A-31         | 48502-96J05 | 337A-5          | 52111-90J02-YAY | 405A-1-1        |
| 39950-88L02     | 602A-26         |             | 337B-5          | 52111-90J12-QTN | 405A-1-4        |
| 40000           |                 |             | 340A-11         | 52111-90J12-YAY | 405A-1-3        |
|                 |                 | 48503-96J05 | 337A-6          | 54112-90J21     | 401A-22         |
|                 |                 |             | 337B-6          | 54114-90J10     | 401A-25         |
|                 |                 | 48570-95E01 | 337A-16         |                 | 405A-13         |
|                 |                 |             | 337B-16         | 54121-87D01     | 405A-8          |
|                 | 41111-92J03-QTN | 48572-95E00 | 337A-17         | 54123-90J01     | 401A-21         |
|                 | 41111-92J03-YAY |             | 337B-17         | 54125-90J11     | 401A-26         |
|                 | 41121-92J21-QTN | 48582-95E01 | 340A-12         | 54130-90J40     | 401A-23         |
|                 | 41121-92J21-YAY | 48583-95E00 | 337A-18         | 54148-90J11     | 401A-27         |
|                 | 41130-92J30     |             | 337B-18         | 54151-90J00     | 405A-14         |
| 41135-92J00     | 335A-4          | 48585-95E00 | 337A-19         | 54160-90J20     | 405A-9          |
| 41161-94400     | 442A-1          |             | 337B-19         | 54166-90J11     | 405A-10         |
| 41220-95E13     | 336A-17         | 48588-94900 | 337A-20         | 54211-90J01-QTN | 405A-15-2       |
| 41221-95E40     | 336A-18         |             | 337B-20         | 54211-90J01-YAY | 405A-15-1       |
| 41224-95E01     | 336A-19         | 48601-94900 | 337A-8          | 54221-90J02-QTN | 405A-6-2        |
| 41225-94401     | 336A-20         |             | 337B-8          | 54221-90J02-YAY | 405A-6-1        |
|                 | 420A-2          | 48615-97E00 | 337A-15         | 55110-90J16-QTN | 407A-1-2        |
| 41226-97E00     | 210A-7          |             | 337B-15         |                 | 407B-1-2        |
|                 | 210B-7          | 48627-95E00 | 337A-9          | 55110-90J16-YAY | 407A-1-1        |
|                 |                 |             | 337B-9          |                 | 407B-1-1        |
| 41228-90J00     | 336A-21         |             | 337A-10         | 55110-92J01-QTN | 407C-1-2        |
| 41230-95E00     | 336A-22         | 48630-96J04 | 337B-10         |                 | 407D-1-2        |
| 41233-95E10     | 336A-23         |             | 337B-10         |                 | 407D-1-2        |
| 43111-92J80-QTN | 336A-4-2        | 48633-94900 | 337A-11         | 55110-92J01-YAY | 407C-1-1        |
| 43111-92J80-YAY | 336A-4-1        |             | 337B-11         |                 | 407D-1-1        |
| 43111-92J90-QTN | 336A-4-4        | 48641-96J04 | 337A-12         | 55116-87E00     | 407A-28         |
| 43111-92J90-YAY | 336A-4-3        |             | 337B-12         |                 | 407C-26         |
| 43112-99E00     | 180A-4          | 48650-94900 | 337A-13         | 55125-90J01     | 407A-3          |
| 43211-93J11     | 336A-5          |             | 337B-13         |                 | 407B-3          |
| 43711-97E11     | 336A-6          | 48861-92J01 | 337A-21         | 55125-92J00-QTN | 407C-3-2        |
| 43750-90J61-QTN | 336A-7-2        |             | 337B-21         |                 | 407D-3-2        |
| 43750-90J61-YAY | 336A-7-1        | 48862-92J20 | 337A-22         | 55125-92J00-YAY | 407C-3-1        |
| 43750-90J71-QTN | 336A-7-4        |             | 337B-22         |                 | 407D-3-1        |
| 43750-90J71-YAY | 336A-7-3        | 48862-92J30 | 337A-23         | 55127-87D00     | 407A-4          |
| 45421-87D03     | 335A-15         |             | 337B-23         |                 | 407B-4          |
| 48000-96J15     | 337A-1          | 48864-96J10 | 340A-13         |                 | 407C-4          |
|                 | 337B-1          |             |                 |                 | 407D-4          |
| 48121-92J00     | 337A-24         | 50000       |                 | 55320-94900     | 335A-5          |
|                 | 337B-24         |             |                 | 55321-87J01     | 111A-7          |
| 48311-96J20     | 337A-25         |             |                 |                 | 113A-14         |
|                 | 337B-25         |             |                 |                 | 310A-5-1        |

| PART NO.        | FIG.NO.-REF.NO. | PART NO.        | FIG.NO.-REF.NO. | PART NO.        | FIG.NO.-REF.NO. |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 55321-87J11     | 310A-5-2        |                 | 407C-27         | 61443-99L00     | 420A-11-1       |
|                 | 337A-37         | 57631-92J10     | 220A-21         | 61443-99L10     | 420A-11-2       |
| 55321-90J01     | 407A-5          |                 | 220B-36         | 61453-99L00     | 420A-12-1       |
|                 | 407B-5          | 57633-90J02     | 407A-23         | 61453-99L10     | 420A-12-2       |
|                 | 407C-5          |                 | 407B-21         | 61458-90J01     | 410A-35         |
|                 | 407D-5          |                 | 407C-21         | 61494-99L00     | 136A-11         |
| 55321-94910     | 335A-17         |                 | 407D-19         | 61610-93J00     | 420A-4          |
| 55332-87D02     | 160A-26         | 57635-92J01     | 407A-24         | 61621-93J01     | 420A-5          |
|                 | 160B-26         |                 | 407B-22         | 61632-93J00     | 410A-16         |
| 55332-87D12     | 407A-6          |                 | 407C-22         | 61633-96J02     | 410A-17         |
|                 | 407B-6          |                 | 407D-20         | 61634-96J02     | 410A-18         |
|                 | 407C-6          | 58100-90JA0-019 | 407A-19-1       | 61641-93J10     | 410A-19         |
|                 | 407D-6          |                 | 407B-19-1       | 61645-90J01-QTN | 410A-20-2       |
| 55333-87D02     | 160A-27         | 58100-90JB0-019 | 407A-19-2       | 61645-90J01-YAY | 410A-20-1       |
|                 | 160B-27         |                 | 407B-19-2       | 61648-99L00     | 410A-33         |
| 55333-87D10     | 407A-7          | 58100-90JC0-019 | 407A-19-3       | 61673-96J02     | 410A-21         |
|                 | 407B-7          |                 | 407B-19-3       | 61682-99L00     | 420A-6          |
|                 | 407C-7          | 58100-90JD0-019 | 407A-19-4       | 61811-99L00-QTN | 410A-1-2        |
|                 | 407D-7          |                 | 407B-19-4       | 61811-99L00-YAY | 410A-1-1        |
| 56120-92J01-QTN | 220A-27-2       | 58100-90JE0-019 | 407A-19-5       | 61814-99L00     | 410A-5          |
| 56120-92J01-YAY | 220A-27-1       |                 | 407B-19-5       | 61820-99L00-QTN | 410A-2-2        |
| 56120-92J12-QTN | 220B-1-2        | 58105-90J00     | 407A-20         | 61820-99L00-YAY | 410A-2-1        |
| 56120-92J12-YAY | 220B-1-1        |                 | 407A-22         | 61824-99L00     | 410A-6          |
| 56123-92J00     | 220A-28         |                 | 407B-20         | 61827-99L00     | 410A-3          |
|                 | 220B-2          |                 | 407C-20         | 61830-99L00-QTN | 410A-12-2       |
| 56130-90J00     | 220A-35         | 58200-92J40     | 407A-21-1       | 61830-99L00-YAY | 410A-12-1       |
|                 | 220B-8          | 58200-92J50     | 407A-21-2       | 65000-94L10     | 432A-1          |
| 56140-92J00     | 220A-39         | 58200-92J60     | 407A-21-3       | 65520-99100     | 432A-2          |
| 56140-92J30     | 220B-11         | 58200-92J70     | 407A-21-4       | 65561-95D00     | 432A-3          |
| 57110-92J60     | 220A-1-1        | 58200-92J80     | 407A-21-5       | 65700-90J24     | 430A-1          |
|                 | 220B-16-1       | 58200-92J90     | 407A-21-6       |                 | 432A-5          |
| 57110-92J70     | 220A-1-2        | 58200-92JA0     | 407C-19-1       | 65740-95D01     | 432A-4          |
|                 | 220B-16-2       | 58200-92JB0     | 407C-19-2       | 65750-95501     | 430A-2          |
| 57130-92J01     | 405A-5          | 58200-92JC0     | 407C-19-3       |                 | 432A-6          |
| 57133-90J02     | 220A-2          | 58200-92JD0     | 407C-19-4       | 65770-90J04     | 475A-1          |
|                 | 220B-17         |                 |                 | 65770-90J13     | 430A-3          |
| 57300-99L10     | 220A-7          |                 |                 |                 | 432A-7          |
| 57300-99L30     | 220B-22         | 60000           |                 | 67200-98J06     | 543A-1          |
| 57500-87861     | 220A-11         |                 |                 | 67200-98J16     | 540A-1          |
| 57500-87873     | 220A-9          |                 |                 | 67200-98J24     | 520A-1          |
|                 | 220B-24         | 61112-99L00     | 420A-3          | 67211-98J20     | 520A-18         |
| 57500-92813     | 220A-15         | 61124-99L00     | 410A-28         |                 | 540A-2          |
|                 | 220B-30         | 61134-99L00     | 410A-7          |                 | 543A-2          |
| 57610-99L00     | 220A-18         | 61150-99E01     | 180A-5          | 67211-98J30     | 540A-48         |
| 57610-99L10     | 220B-34         | 61155-99E01     | 180A-7          | 67212-98J20     | 543A-7          |
| 57616-90J00     | 220A-26         | 61401-99810-YAY | 420A-1-1        | 67212-98J30     | 540A-8          |
| 57616-92J00     | 220B-42         | 61401-99820-QTN | 420A-1-2        | 67222-98J00     | 520A-32         |
| 57621-99L00     | 220A-19         | 61435-99L00     | 420A-15-1       | 67222-98J10     | 540A-10         |
|                 | 220B-35         | 61435-99L10     | 420A-15-2       |                 | 543A-9          |
| 57630-90J00     | 407A-29         | 61441-92J10     | 420A-13         | 67222-98J20     | 540A-49         |

| PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 67223-98J00 | 520A-36         | 67259-98J00 | 520A-11         | 67288-98J30 | 540A-46         |
|             | 540A-17         | 67261-98J00 | 540A-5          |             | 543A-46         |
|             | 543A-16         |             | 543A-5          | 67288-98J40 | 540A-34         |
| 67226-98J00 | 540A-37         | 67261-98J10 | 540A-6          |             | 543A-40         |
|             | 543A-36         | 67261-98J20 | 520A-5          | 67288-98J50 | 520A-23         |
| 67226-98J10 | 520A-26         | 67261-98J30 | 520A-6          | 67288-98J60 | 520A-27         |
| 67227-98J00 | 540A-41         | 67263-98J00 | 540A-7          | 67288-98J70 | 520A-30         |
| 67227-98J10 | 520A-42         |             | 543A-6          | 67292-98J00 | 520A-40         |
|             | 540A-25         | 67263-98J20 | 520A-4          |             | 540A-23         |
|             | 543A-24         | 67264-98J00 | 520A-3          |             | 543A-22         |
| 67227-98J20 | 520A-21         | 67265-98J00 | 520A-7          | 67294-98J00 | 520A-13         |
| 67227-98J30 | 520A-22         | 67269-98J01 | 540A-27         | 67296-94300 | 520A-43         |
| 67228-98J50 | 520A-47         |             | 543A-26         |             | 540A-33         |
|             | 540A-47         | 67269-98J10 | 520A-53         |             | 543A-33         |
|             | 543A-47         | 67269-98J20 | 520A-19         | 67296-98J00 | 540A-32         |
| 67233-98J00 | 520A-15         | 67269-98J30 | 540A-44         |             | 543A-39         |
| 67233-98J10 | 540A-14         |             | 543A-44         | 67296-98J10 | 520A-45         |
|             | 543A-13         | 67271-98J20 | 520A-2          |             | 543A-41         |
| 67234-98J00 | 520A-17         | 67271-98J30 | 543A-8          | 67296-98J20 | 543A-35         |
| 67235-98J00 | 520A-34         | 67271-98J40 | 540A-9          | 67296-98J30 | 540A-30         |
| 67235-98J10 | 540A-12         | 67272-98J00 | 520A-51         | 67296-98J50 | 520A-50         |
|             | 543A-11         | 67272-98J10 | 540A-20         |             | 540A-18         |
| 67236-98J00 | 520A-33         |             | 543A-19         |             | 543A-17         |
| 67236-98J10 | 540A-11         | 67273-98J00 | 543A-27         | 67296-98J60 | 520A-48         |
|             | 543A-10         | 67273-98J10 | 540A-51         |             | 540A-29         |
| 67237-98J00 | 520A-35         |             | 543A-48         |             | 543A-28         |
| 67237-98J20 | 602A-33         | 67273-98J20 | 540A-28         | 67296-98J90 | 540A-40         |
| 67237-98J30 | 543A-12         | 67273-98J30 | 540A-52         |             | 543A-31         |
| 67237-98J40 | 540A-13         |             | 543A-49         | 67296-98JA0 | 520A-16         |
| 67237-98J50 | 540A-56         | 67274-98J00 | 543A-29         |             | 540A-19         |
| 67238-98J00 | 520A-29         | 67277-98J00 | 540A-53         |             | 543A-18         |
| 67239-98J00 | 540A-16         |             | 543A-50         | 67296-98JB0 | 520A-20         |
|             | 543A-15         | 67284-98J10 | 540A-42         | 67296-98JC0 | 520A-24         |
| 67246-98J00 | 520A-31         |             | 543A-42         | 67296-98JD0 | 520A-28         |
| 67246-98J10 | 540A-4          | 67287-92E00 | 540A-15         | 67296-98JE0 | 520A-37         |
|             | 543A-4          |             | 540A-39         | 67296-98JF0 | 540A-54         |
| 67246-98J20 | 540A-50         |             | 543A-14         |             | 543A-51         |
| 67251-98J00 | 540A-3          |             | 543A-38         | 67296-98JG0 | 540A-31         |
|             | 543A-3          | 67287-98J00 | 520A-25         |             | 543A-32         |
| 67251-98J20 | 520A-12         | 67288-92E20 | 540A-36         | 67297-98J00 | 540A-55         |
| 67252-98J00 | 520A-38         |             | 543A-30         |             | 543A-52         |
| 67252-98J10 | 540A-21         | 67288-98J00 | 520A-44         | 67361-90J10 | 410A-36         |
|             | 543A-20         |             | 540A-35         | 67467-89J01 | 204A-12         |
| 67254-98J00 | 520A-14         |             | 543A-34         | 67467-89J10 | 204A-13         |
| 67255-98J00 | 520A-8          | 67288-98J10 | 520A-46         | 67471-99E00 | 204A-14         |
| 67256-98J00 | 520A-10         |             | 540A-45         | 67471-99E10 | 204A-15         |
| 67257-98J00 | 520A-54         |             | 543A-45         | 67600-99L00 | 442A-7          |
|             | 540A-43         | 67288-98J20 | 520A-39         | 67631-99L00 | 442A-8          |
|             | 543A-43         |             | 540A-22         | 67701-90J01 | 442A-2          |
| 67258-98J00 | 520A-9          |             | 543A-21         | 67721-99E00 | 442A-3          |

| PART NO.        | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. |
|-----------------|-----------------|-------------|-----------------|-------------|-----------------|
| 67725-99E00     | 442A-4          |             | 303A-9          | 04221-05109 | 119A-5          |
| 67725-99E10     | 442A-9          |             | 322A-5          | 06111-07004 | 220A-23         |
| 67726-99E00     | 442A-5          |             | 326A-26         |             | 220B-38         |
|                 | 442A-10         | 01550-0620A | 119A-17         | 06111-11004 | 220A-24         |
| 67728-99E00     | 442A-6          | 01550-0620C | 162A-20         |             | 220B-39         |
| 68111-93J00     | 420A-14         |             | 162A-21         | 07130-05167 | 326A-17         |
| 69711-93E11     | 136A-12         |             | 310A-2          | 08113-62090 | 220A-32         |
|                 |                 |             | 310A-19         | 08211-30382 | 220A-12-1       |
|                 |                 |             | 326A-27         | 08310-00067 | 322A-12         |
|                 |                 | 01550-06257 | 310A-18         |             | 322A-23         |
|                 |                 | 01550-0625C | 144A-6          | 08316-10067 | 136A-10         |
|                 |                 |             | 144B-6          | 08316-1006A | 119A-19         |
|                 |                 |             | 180A-19         | 08316-10087 | 322A-2          |
|                 |                 |             | 401A-14         | 08316-1008C | 122A-6          |
|                 |                 | 01550-0630C | 310A-20         |             | 144A-14         |
| 99011-99L00-03B | 420A-18-2       | 01550-06357 | 326A-28         |             | 144B-14         |
| 99011-99L00-054 | 420A-18-1       | 01550-0655C | 162A-22         |             | 146A-19         |
| 99011-99L00-059 | 420A-18-3       |             | 326A-29         | 08321-0105C | 326A-18         |
|                 |                 | 01550-08207 | 113A-16         | 08321-01067 | 322A-22         |
|                 |                 |             | 301A-18         | 08331-3112A | 175A-13         |
|                 |                 | 01550-0820C | 111A-9          | 08331-41269 | 119A-8          |
|                 |                 |             | 113A-8          | 08331-41359 | 204A-33         |
|                 |                 |             | 163A-3          |             | 401A-6          |
|                 |                 | 01550-0825A | 401A-20         | 08341-31059 | 303A-11         |
|                 |                 | 01550-0825C | 175A-18         | 09100-06131 | 407A-8          |
| 01421-0616A     | 119A-15         |             | 204A-29         |             | 407B-8          |
| 01421-0820C     | 144A-12         | 01550-0830C | 204A-30         |             | 407C-8          |
|                 | 144B-12         | 01550-0835A | 119A-18         |             | 407D-8          |
| 01421-0830C     | 122A-4          | 01550-0835C | 122A-5          | 09100-12081 | 442A-11         |
| 01500-06167     | 322A-11         | 01550-0840C | 113A-9          | 09100-12090 | 335A-7-2        |
| 01547-0616C     | 420A-8          | 01550-0855C | 204A-31         | 09100-12091 | 335A-7-1        |
| 01547-0620C     | 420A-9          | 01550-0860C | 163A-4          | 09103-05026 | 410A-27         |
| 01547-0625A     | 175A-10         | 01550-0880C | 204A-32         | 09103-06093 | 315A-15         |
| 01547-0625C     | 111A-23         | 01550-1050C | 301A-19         | 09103-06211 | 146A-20         |
| 01547-0635A     | 175A-11         | 01550-12167 | 144A-13         | 09103-06231 | 303A-6          |
| 01547-0655C     | 111A-24         | 01550-1230C | 113A-2          | 09103-06240 | 136A-6          |
| 01550-0612C     | 143A-40         | 02112-0408A | 143A-15         | 09103-06266 | 111A-2          |
|                 | 143B-40         | 02112-0612A | 111A-25         | 09103-06281 | 111A-8          |
|                 | 162A-28         | 02122-04167 | 326A-16         |             | 113A-15         |
|                 | 162A-29         | 02142-0408B | 143A-24         |             | 310A-6          |
|                 | 303A-17         | 02142-0616C | 322A-6          | 09103-12049 | 119A-3          |
|                 | 310A-21         | 02162-05207 | 315A-14         | 09103-16004 | 303A-7          |
|                 | 322A-26         | 03122-05165 | 530A-9          | 09106-05030 | 303A-10         |
|                 | 326A-15         |             | 535A-10         | 09106-10065 | 335A-13         |
|                 | 420A-10         | 03122-05169 | 530A-19         | 09108-06060 | 136A-7          |
| 01550-0616A     | 119A-16         | 03542-06209 | 136A-3          | 09116-06121 | 162A-7          |
|                 | 175A-12         | 04211-11129 | 401A-17         |             | 335A-6          |
| 01550-0616C     | 146A-21         | 04211-13149 | 301A-20         | 09116-06127 | 410A-22         |
|                 | 180A-16         | 04211-13189 | 111A-13         | 09116-06517 | 134A-6          |
|                 | 204A-28         | 04221-04089 | 116A-7          |             | 143A-28         |



| PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 09116-08122 | 143B-28         | 09140-10031 | 337A-29         | 09160-30055 | 220B-43         |
|             | 310A-22         |             | 337B-29         |             | 220B-44         |
|             | 220A-34         |             | 336A-25         |             | 220B-26-6       |
|             | 220B-14         |             | 220A-8          |             | 220B-26-8       |
| 09116-08131 | 160A-12         | 09141-18005 | 220B-23         | 09160-35006 | 220B-26-4       |
| 09116-08137 | 160B-12         |             | 407A-25         |             | 220B-26-5       |
|             | 335A-8          |             | 407B-23         |             | 220B-26-7       |
|             | 407A-9          |             | 407C-23         |             | 220B-26-9       |
| 09116-08177 | 407B-9          | 09159-12014 | 407D-21         | 09160-35013 | 220B-26-3       |
|             | 407C-9          |             | 335A-9          |             | 220B-26-2       |
|             | 407D-9          |             | 401A-24         |             | 220B-26-1       |
|             | 401A-10         |             | 401A-29         |             | 336A-10         |
| 09116-08174 | 410A-13         | 09159-14020 | 405A-11         | 09160-60003 | 220B-28-3       |
| 09116-08177 | 111A-12         |             | 335A-16         |             | 220B-28-4       |
| 09116-08178 | 180A-8          |             | 335A-10         |             | 220B-28-5       |
|             | 401A-11         |             | 540A-38         |             | 220B-28-6       |
| 09116-10129 | 180A-9          | 09160-05029 | 543A-37         | 09160-60007 | 220B-28-7       |
|             | 407A-10         |             | 326A-10         |             | 220B-28-1       |
|             | 407B-10         |             | 204A-16         |             | 220B-28-2       |
|             | 407C-10         |             | 336A-26         |             | 220B-27         |
| 09116-10179 | 407D-10         | 09160-06082 | 136A-8          | 09160-70002 | 220A-13         |
|             | 337A-28         |             | 310A-12         |             | 220B-29         |
|             | 337B-28         |             | 407A-12         |             | 160A-14         |
|             | 401A-28         |             | 407B-12         |             | 160B-14         |
| 09116-10181 | 405A-2          | 09160-06085 | 407C-12         | 09161-16008 | 337A-30         |
|             | 405A-7          |             | 407D-12         |             | 337B-30         |
|             | 220A-38         |             | 204A-17         |             | 410A-24         |
|             | 220B-15         |             | 520A-49         |             | 220A-3          |
| 09117-08110 | 407A-11         | 09160-06104 | 401A-16         | 09164-31001 | 220B-18         |
|             | 407B-11         |             | 335A-14         |             | 407A-13         |
|             | 407C-11         |             | 442A-12         |             | 407B-13         |
|             | 407D-11         |             | 335A-12         |             | 407C-13         |
| 09125-05046 | 160A-13         | 09160-12110 | 401A-30         | 09168-10022 | 407D-13         |
|             | 160B-13         |             | 335A-11         |             | 180A-10         |
|             | 315A-16         |             | 405A-12         |             | 144A-7          |
|             | 336A-8          |             | 405A-16         |             | 175A-6          |
| 09125-05050 | 337A-36         | 09160-12132 | 410A-23         | 09168-12012 | 322A-31         |
|             | 337B-36         |             | 303A-8          |             | 310A-15         |
|             | 160A-28         |             | 407A-26         |             | 310A-23         |
|             | 160B-28         |             | 407B-24         |             | 134A-4          |
| 09125-06063 | 336A-24         | 09160-12133 | 407C-24         | 09169-06053 | 143A-29         |
|             | 336A-28         |             | 407D-22         |             | 143B-29         |
|             | 336A-29         |             | 220A-12-2       |             | 136A-9          |
|             | 337A-34         |             | 220A-12-3       |             | 410A-14         |
| 09131-05004 | 337B-34         | 09160-30037 | 220A-12-4       | 09169-08050 | 336A-11         |
|             | 530A-26         |             | 220A-12-5       |             | 220A-4          |
|             | 160A-17         |             | 220A-12-6       |             | 220B-19         |
|             | 160B-17         |             | 220A-12-7       |             | 442A-13         |
| 09136-06148 | 410A-9          | 09160-30042 | 220A-12-8       | 09180-09022 | 175A-7          |
|             | 410A-4          |             | 220A-12-9       |             | 220A-5          |
|             |                 |             |                 |             |                 |
|             |                 |             |                 |             |                 |

| PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. | PART NO.    | FIG.NO.-REF.NO. |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 09181-39001 | 220B-20         | 09181-70010 | 220B-31-2       | 09263-28016 | 407A-2          |
|             | 336A-12         |             | 220A-16-7       |             | 407B-2          |
|             | 220A-10-1       |             | 220B-31-4       |             | 407C-2          |
|             | 220B-25-1       |             | 220A-16-8       |             | 407D-2          |
| 09181-40190 | 220A-10-7       | 09181-70011 | 220B-31-6       | 09263-30051 | 220A-29         |
| 09181-40195 | 220B-25-7       |             | 220A-16-9       |             | 220B-3          |
|             | 220A-10-11      |             | 220B-31-8       |             | 220B-13         |
|             | 220B-25-11      |             | 410A-25         |             | 220A-41         |
| 09181-41002 | 220A-10-2       | 09202-04022 | 116A-10         | 09263-50001 | 220B-4          |
|             | 220B-25-2       |             | 09202-05027     |             | 220A-6          |
|             | 220A-10-3       |             | 09202-06031     |             | 220B-21         |
|             | 220B-25-3       |             | 09202-07002     |             | 220B-45         |
| 09181-41004 | 220A-10-4       | 09202-08006 | 220B-40         | 09269-30014 | 220B-32         |
|             | 220B-25-4       |             | 405A-3          |             | 220A-17         |
|             | 220A-10-5       |             | 407A-14         |             | 220B-33         |
|             | 220B-25-5       |             | 407B-14         |             | 180A-6          |
| 09181-41006 | 220A-10-6       | 09204-01006 | 407C-14         | 09280-09016 | 180A-15         |
|             | 220B-25-6       |             | 407D-14         |             | 111A-6          |
|             | 220A-10-8       |             | 204A-18         |             | 113A-13         |
|             | 220B-25-8       |             | 204A-19         |             | 175A-9          |
| 09181-41009 | 220A-10-9       | 09204-03003 | 336A-27         | 09280-21015 | 119A-7          |
|             | 220B-25-9       |             | 407A-27         |             | 111A-20         |
|             | 220A-10-10      |             | 407B-25         |             | 162A-8          |
|             | 220B-25-10      |             | 407C-25         |             | 162A-15         |
| 09181-41010 | 220A-10-12      | 09205-04014 | 407D-23         | 09280-22019 | 401A-13         |
|             | 220B-25-12      |             | 210A-9          |             | 146A-13         |
|             | 220A-10-13      |             | 210B-9          |             | 220A-36         |
|             | 220B-25-13      |             | 111A-3          |             | 220B-9          |
| 09181-41013 | 220A-10-14      | 09206-08001 | 401A-12         | 09280-69001 | 210A-10         |
|             | 220B-25-14      |             | 220A-40         |             | 210B-10         |
|             | 220A-14-1       |             | 220B-12         |             | 220A-30         |
|             | 220A-14-2       |             | 204A-20         |             | 220B-5          |
| 09181-45003 | 220A-14-3       | 09206-11019 | 113A-7          | 09280-97001 | 220A-37         |
|             | 220A-14-4       |             | 410A-37         |             | 220B-10         |
|             | 220A-14-5       |             | 113A-11         |             | 220A-31         |
|             | 220A-14-6       |             | 09247-12013     |             | 220B-6          |
| 09181-45004 | 220A-14-7       | 09248-10008 | 407A-15         | 09282-24003 | 336A-14         |
|             | 220A-16-1       |             | 407B-15         |             | 210A-11         |
|             | 220B-31-3       |             | 407C-15         |             | 210B-11         |
|             | 220A-16-2       |             | 407D-15         |             | 401A-4          |
| 09181-70002 | 220B-31-5       | 09248-12009 | 180A-11         | 09282-24004 | 220A-37         |
|             | 220A-16-3       |             | 204A-21         |             | 220B-10         |
|             | 220B-31-7       |             | 113A-6          |             | 220A-31         |
|             | 220A-16-4       |             | 336A-13         |             | 220B-6          |
| 09181-70003 | 220B-31-9       | 09248-12011 | 146A-3          | 09283-32044 | 220A-37         |
|             | 220A-16-5       |             | 204A-22         |             | 220B-10         |
|             | 220B-31-1       |             | 175A-8          |             | 220A-37         |
|             | 220A-16-10      |             | 09262-17019     |             | 220B-6          |
| 09181-70004 | 220B-31-10      | 09248-12014 | 119A-6          | 09283-32044 | 220B-6          |
|             | 220A-16-6       |             | 401A-7          |             | 220B-6          |
|             |                 |             |                 |             |                 |
|             |                 |             |                 |             |                 |



## SUZUKI **DF140B** PARTS CATALOGUE

---

SUZUKI MOTOR CORPORATION All rights reserved

No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Suzuki Motor Corporation.

SUZUKI MOTOR CORPORATION

Technical Readiness Group, Quality Administration Department

300 Takatsuka, Minami, Hamamatsu, Japan

# **SUZUKI MOTOR CORPORATION**

PRINTED IN JAPAN

**9900B-45483-000**