

SUZUKI

PARTS CATALOGUE

DF25A/30A

DF25A/AR/AT/ATH
DF30A/AQ/AR
DF30AT/ATH



OUTBOARD MOTOR

020 021 022

2021-8

P01/P40

1ST EDITION

This part catalogue supersedes all the following part catalogue with immediate effect

Model of catalogue	Parts catalogue No.
DF25A/30A_021	9900B-45481-000

PREFACE

When it becomes necessary to replace parts on SUZUKI OUTBOARD MOTORS, always use SUZUKI GENUINE PARTS which have passed a strict inspection which guarantees quality and performance.

This parts catalogue covers the list of all service parts for SUZUKI DF25A/30A production start from 2019 to 2021.

INSTRUCTIONS FOR QUOTING THE CATALOGUE

1. DIMENSIONS

Dimensions of the parts in this catalogue are indicated in unit millimeters.

2. ABBREVIATIONS

Abbreviations used in this catalogue are as follows:

AR	: As required	NT	: Number of teeth
ASSY	: Assembly	OPT	: Optional
E. NO.	: Engine number	OS	: Over size
F. NO.	: Frame number	STD	: Standard
D	: Diameter of material	T	: Thickness
ID	: Inside diameter	US	: Under size
OD	: Outside diameter	W	: Width
L	: Length	W/	: With
LH(PORT)	: Left hand side	S, L	: Transom type
RH(STBD)	: Right hand side	SUS	: Stainless steel
~123456	: Up to E. NO. 02504F-123456		
123456~	: From E. NO. 02504F-123456		
12 x 34 x 5.6	: Figures in the description column show the dimensions of parts.		
ID	OD	T(or W, L)	

→12345-56781 (Parts No.) : indicates that the parts number was changed to 12345-56781 and the new parts are interchangeable with the former ones but the former ones are not interchangeable with new ones.

←12345-56781 (Parts No.) : indicates that the former and new parts are interchangeable with each other and both are usable.

3. INNER PARTS OF ASSEMBLY

Part name with a dot (.) in front as shown in the description column indicates the component of the assembly also available individually.

4. MODIFICATION NOTICE

A parts bulletin will be sent to you on all occasions when changes in parts occur, including interchangeable modifications between new parts and old ones.

5. NOTE

5-1. There are some different parts from those of production models among spare parts for the administrative reasons and common use of them with other models.

5-2. In respect of rubber hoses and vinyl tubes, please be sure to use them by cutting off according to the length mentioned on parts catalogue or what is actually required on the vehicle.

5-3. Note that the drawings on the illustration page are for ready reference of spare parts number, not to be used as an assembly manual.
When assembling, use "SUZUKI SERVICE MANUAL".

6. MODEL NAME AND ENGINE NUMBER

MODEL	DESTINATION	TYPE	TRANSOM	COLOR	ENGINE No.
DF25A_020	P01	02504F	S, L	YAY	02504F-040001~
DF25A_021	P01	02504F	S, L	YAY	02504F-140001~
DF25A_022	P01	02504F	S, L	YAY	02504F-240001~
DF25AR_021	P01	02504F	S, L	YAY	02504F-140001~
DF25AT_020	P01	02504F	S, L	YAY, Y5S	02504F-040001~
DF25AT_021	P01	02504F	S, L	YAY	02504F-140001~
DF25AT_022	P01	02504F	S, L	YAY	02504F-240001~
DF25ATH_020	P01	02504F	S, L	YAY, Y5S	02504F-040001~
DF25ATH_021	P01	02504F	S, L	YAY	02504F-140001~
DF25ATH_022	P01	02504F	S, L	YAY	02504F-240001~
DF30A_020	P40	03003F	S, L	YAY, Y5S	03003F-040001~
DF30A_021	P40	03003F	S, L	YAY	03003F-140001~
DF30A_022	P40	03003F	S, L	YAY	03003F-240001~

DF30AQ_020	P01	03003F	S, L, X	YAY	03003F-040001~
DF30AQ_021	P01	03003F	S, L	YAY	03003F-140001~
DF30AQ_022	P01	03003F	S, L	YAY	03003F-240001~

MODEL	DESTINATION	TYPE	TRANSOM	COLOR	ENGINE No.
DF30AR_020	P01	03003F	S, L	YAY	03003F-040001~
DF30AR_021	P01	03003F	S, L	YAY	03003F-140001~
DF30AR_022	P01	03003F	S, L	YAY	03003F-240001~
DF30AT_020	P01	03003F	S, L	YAY, Y5S	03003F-040001~
DF30AT_021	P01	03003F	S, L	YAY	03003F-140001~
DF30AT_022	P01	03003F	S, L	YAY	03003F-240001~
DF30ATH_020	P01	03003F	S, L	YAY, Y5S	03003F-040001~
DF30ATH_021	P01	03003F	S, L	YAY	03003F-140001~
DF30ATH_022	P01	03003F	S, L	YAY	03003F-240001~

[illegible][illegible]

MILLIMETER → INCH CONVERSION CHART


	0	1	2	3	4	5	6	7	8	9
00	.000	.039	.079	.118	.157	.197	.236	.276	.315	.354
10	.394	.433	.472	.512	.551	.591	.630	.669	.709	.748
20	.787	.827	.866	.906	.945	.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.535
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
50	1.969	2.008	2.047	2.087	2.126	2.165	2.205	2.214	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.717
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.031	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

How to read

	0	1	2	3	4
00	...	...	...	...	...
10	...	...	...	...	...
20	...	...	...	0.906	...
30	...	...	...	...	...


23 millimeters equal 0.906 inch

FIG.111A

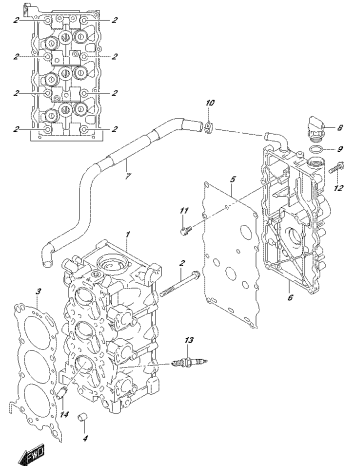


DF20M_30A_P01_002_111A
CYLINDERHEAD

FIG.113A

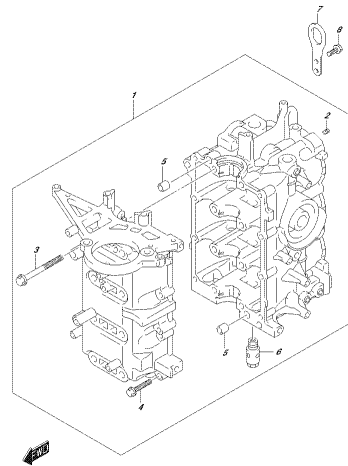


DF20M_30A_P01_002_113A
CRANKSHAFT

FIG.116A

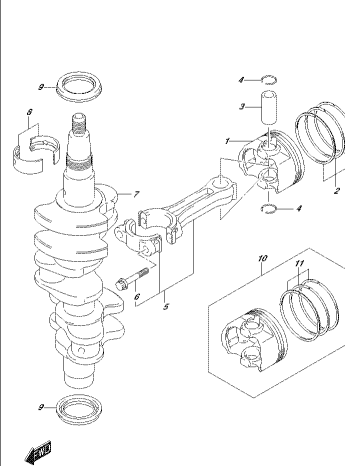


DF20M_30A_P01_002_116A
CRANKSHAFT

FIG.120A

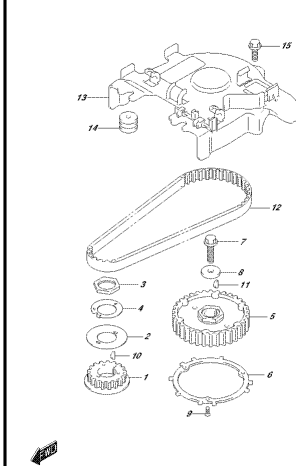


DF20M_30A_P01_002_120A
TIMING BELT

FIG.121A

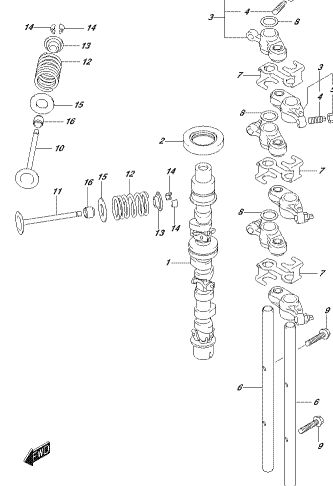


DF20M_30A_P01_002_121A
CRANKSHAFT

FIG.122A

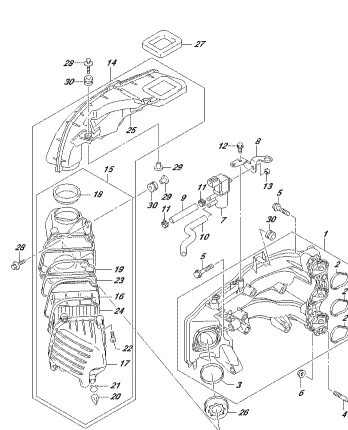


DF20M_30A_P01_002_122A
PISTON AND ROD

FIG.122B

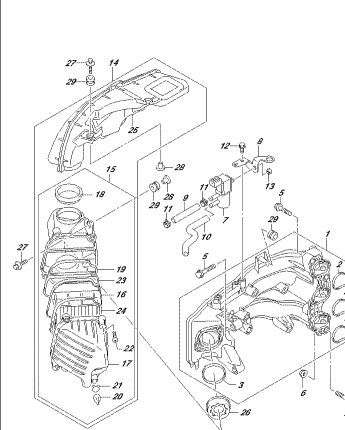

DF20M_30A_P01_002_122B
PISTON AND ROD

FIG.122C

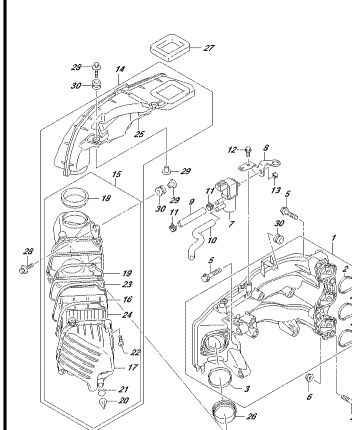

DF20M_30A_P01_002_122C
PISTON AND ROD

FIG.122D

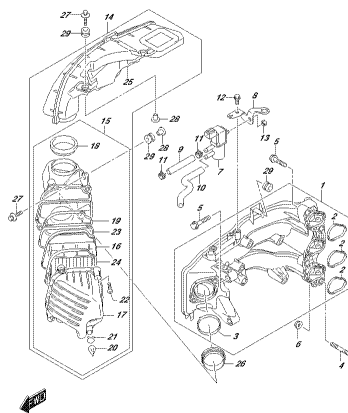


FIG.122D, 304, P01, 022, 122D
FUEL PUMP

FIG.139A

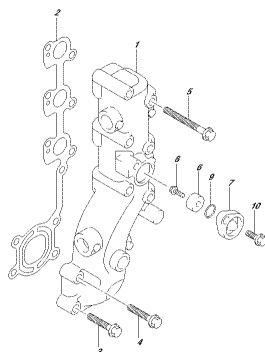


FIG.139A, 304, P01, 022, 139A
FUEL PUMP

FIG.144A

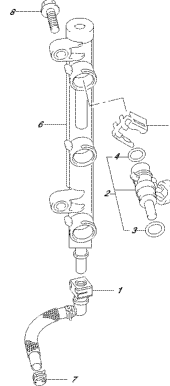


FIG.144A, 304, P01, 022, 144A
FUEL PUMP

FIG.146A

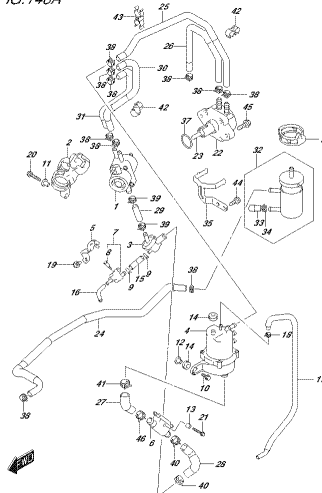


FIG.146A, 304, P01, 022, 146A
FUEL PUMP

FIG.146B

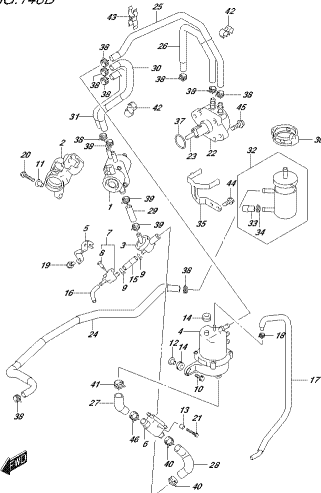


FIG.146B, 304, P01, 022, 146B
FUEL PUMP

FIG.146C

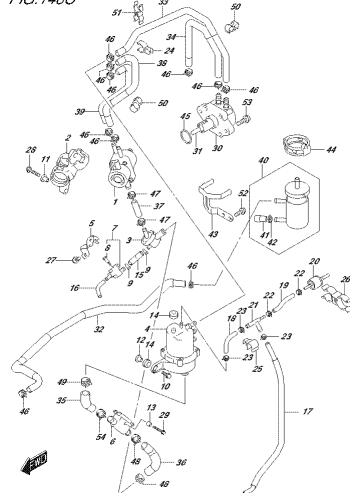


FIG.146C, 304, P01, 022, 146C
FUEL PUMP

FIG.146D

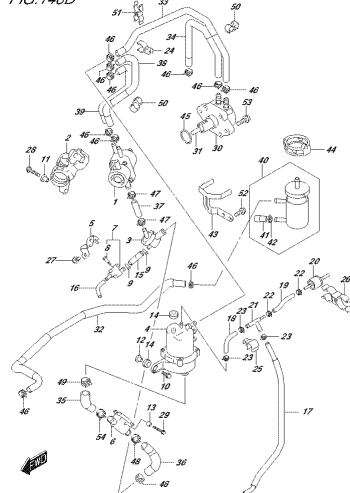


FIG.146D, 304, P01, 022, 146D
FUEL PUMP

FIG.160A


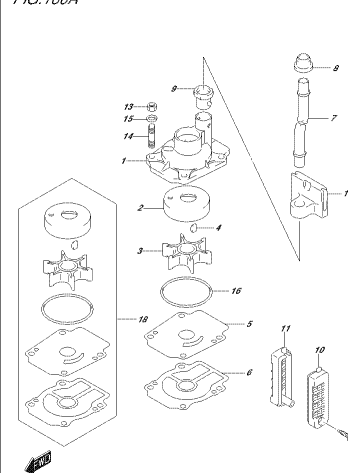



FIG.160A, 304, P01, 022, 160A
FUEL PUMP

FIG. 160B

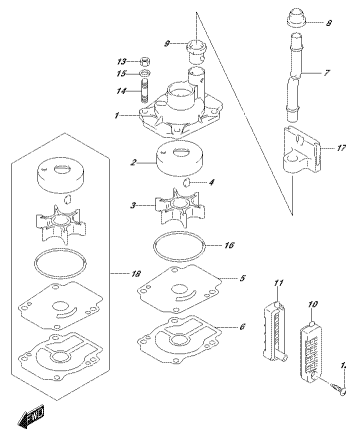


DF25M_35A_P01_022_160B
STARTER PUMP

FIG. 160C

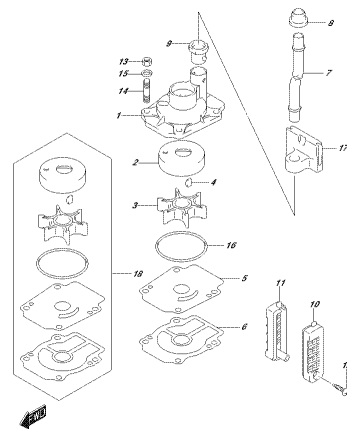


DF25M_35A_P01_022_160C
STARTER PUMP

FIG. 162A

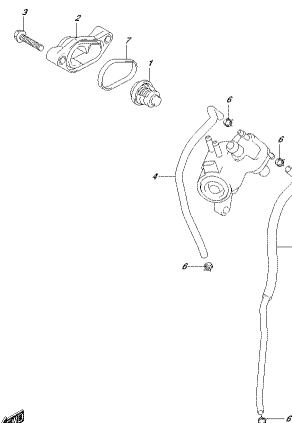


DF25M_35A_P01_022_162A
THROTTLE BODY

FIG. 163A

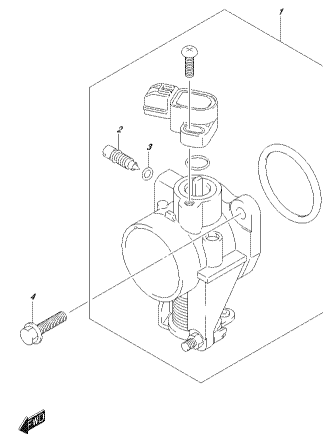


DF25M_35A_P01_022_163A
THROTTLE BODY

FIG. 166A




DF25M_35A_P01_022_166A
THROTTLE CONTROL

FIG. 166B

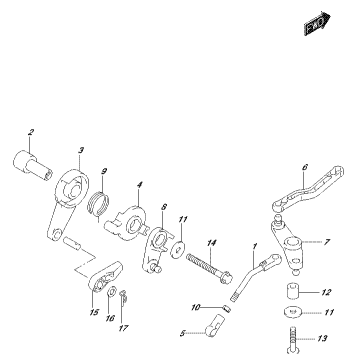


DF25M_35A_P01_022_166B
THROTTLE CONTROL

FIG. 167A

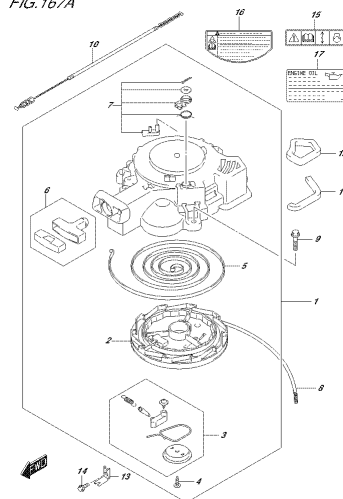

DF25M_35A_P01_022_167A
THROTTLE CONTROL

FIG. 175A

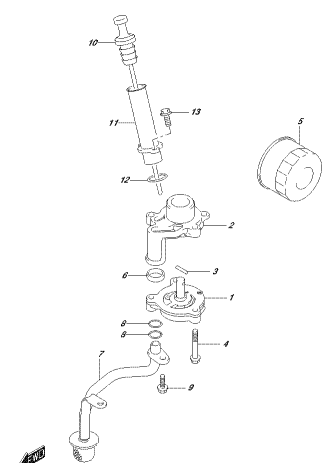

DF25M_35A_P01_022_175A
ON PUMP

FIG.206A

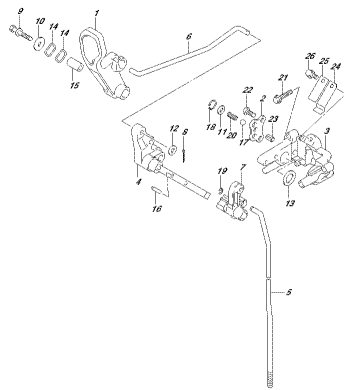


FIG.206A, FIG.206B, FIG.206C
CLUTCH ROD

FIG.206B

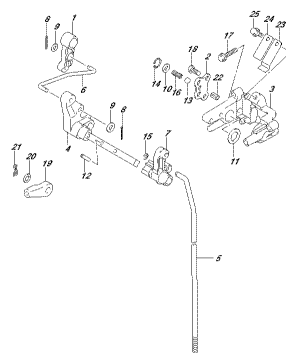


FIG.206A, FIG.206B, FIG.206C
CLUTCH ROD

FIG.206C

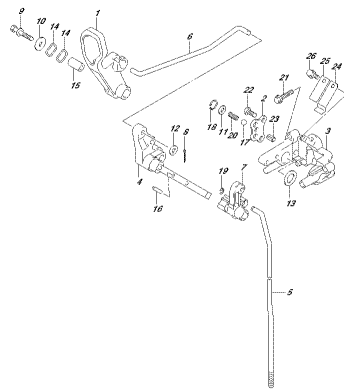


FIG.206A, FIG.206B, FIG.206C
CLUTCH ROD

FIG.210A

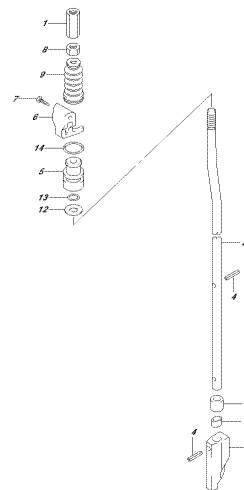


FIG.206A, FIG.206B, FIG.210A, FIG.210B
SHIFT ROD

FIG.210B

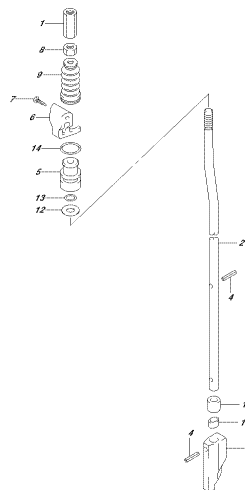


FIG.206A, FIG.206B, FIG.210A, FIG.210B
SHIFT ROD

FIG.210C

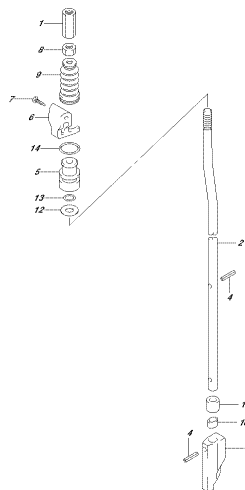


FIG.206A, FIG.206B, FIG.210C
SHIFT ROD

FIG.220A

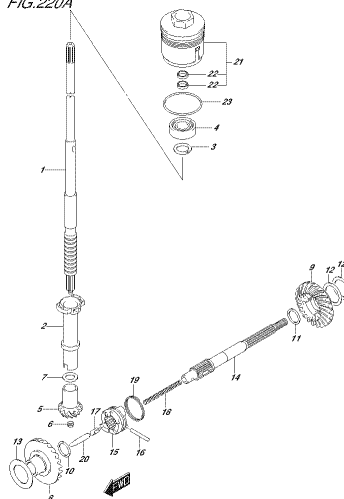


FIG.206A, FIG.206B, FIG.220A, FIG.220B
TRANSMISSION

FIG.220B


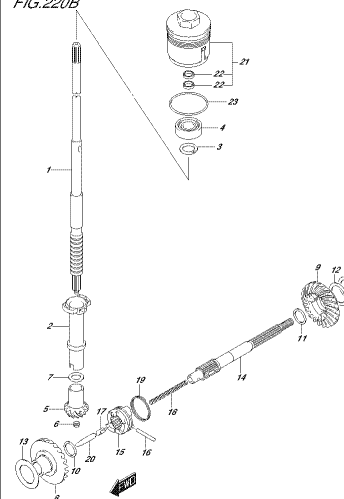



FIG.206A, FIG.206B, FIG.220B
TRANSMISSION

FIG.220C

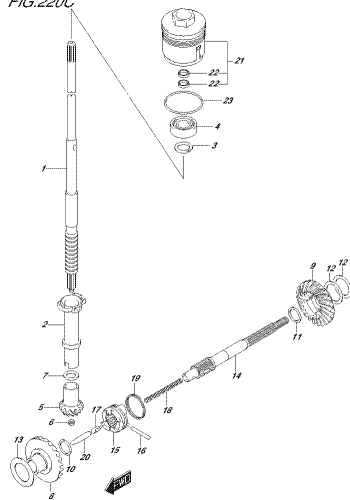


DF284_304_PV1_022_0202
STW40385200V

FIG.301A

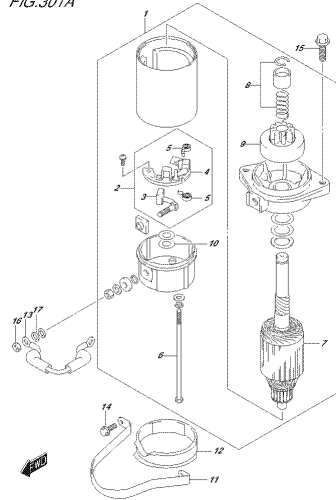


DF284_304_PV1_022_301A
STW40385200V

FIG.301B

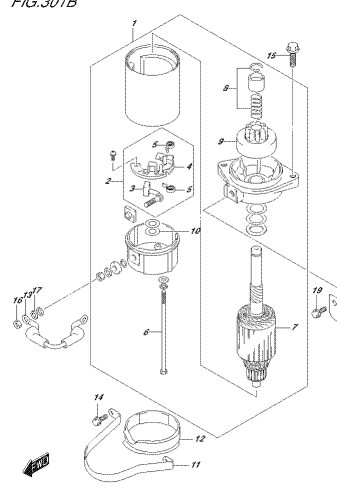


DF284_304_PV1_022_301B
STW40385200V

FIG.301C

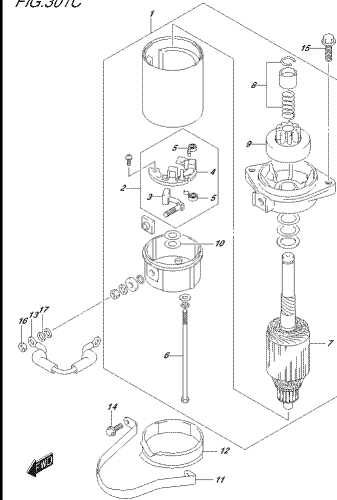


DF284_304_PV1_022_301C
STW40385200V

FIG.303A

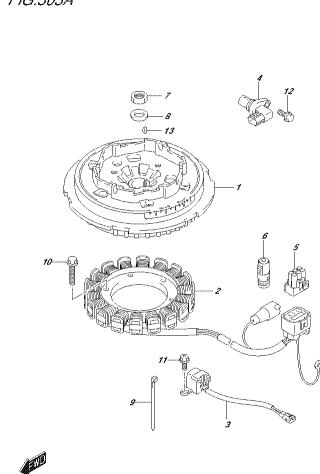


DF284_304_PV1_022_303A
KAG40470

FIG.303B

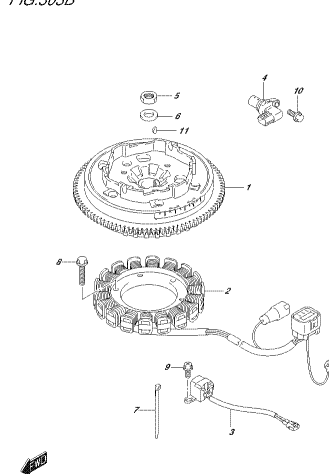


DF284_304_PV1_022_303B
KAG40470

FIG.310A

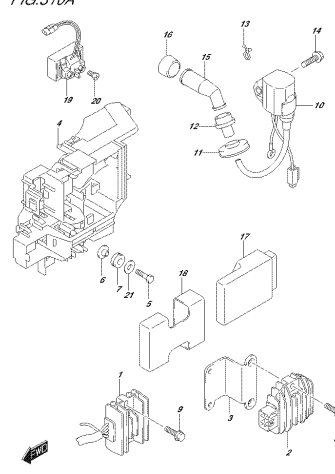


DF284_304_PV1_022_310A
RECTIFIER/REPTER/COIL

FIG.310B

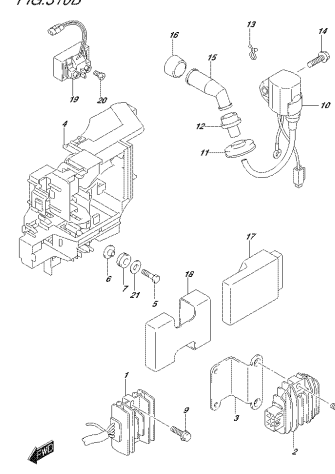


DF284_304_PV1_022_310B
RECTIFIER/REPTER/COIL

FIG.310C

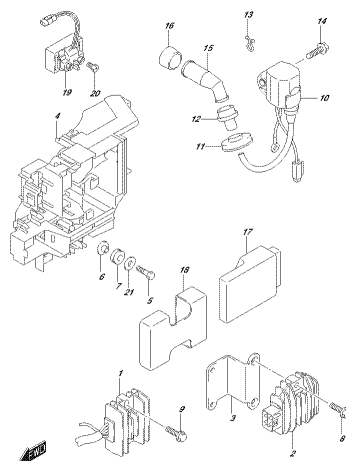


DF284_284_P01_022_310C
RECEPTOR/ANTENNA CODE

FIG.310D

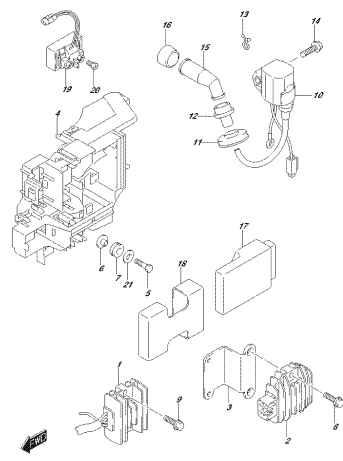


DF284_284_P01_022_310D
RECEPTOR/ANTENNA CODE

FIG.310E

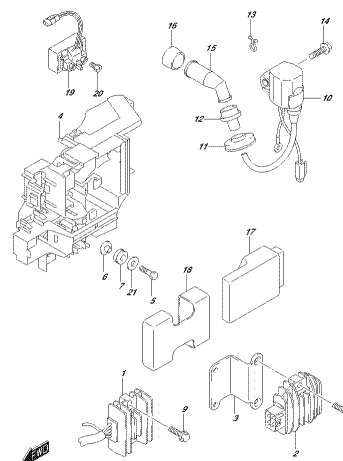


DF284_284_P01_022_310E
RECEPTOR/ANTENNA CODE

FIG.322A

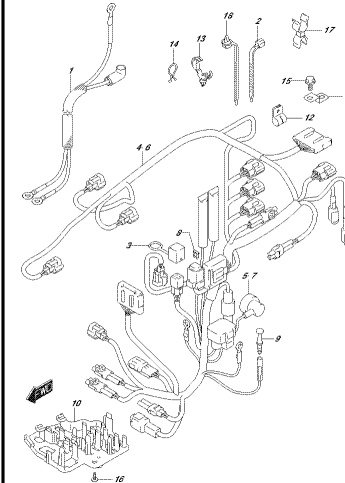


DF284_284_P01_022_322A
HARNESS

FIG.322B

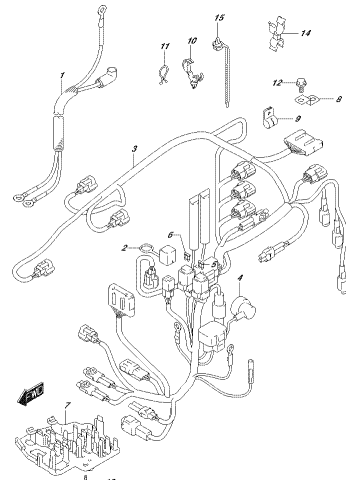


DF284_284_P01_022_322B
HARNESS

FIG.322C

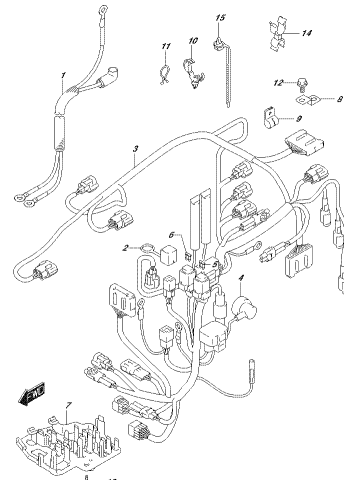


DF284_284_P01_022_322C
HARNESS

FIG.322D

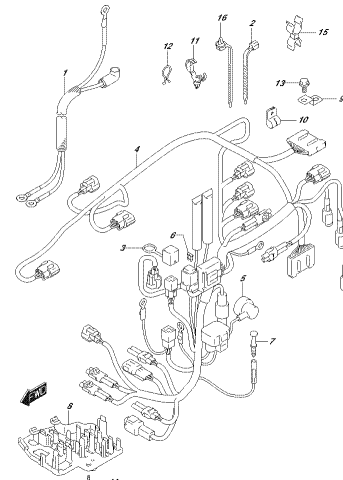


DF284_284_P01_022_322D
HARNESS

FIG.327A

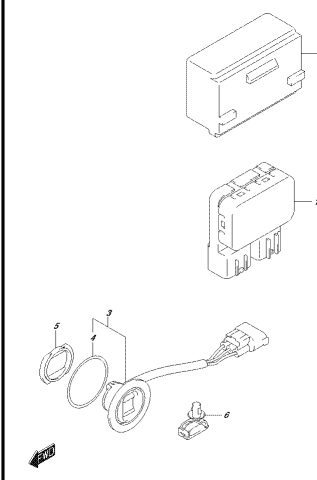


DF284_284_P01_022_327A
FIT SWITCH

FIG.327B

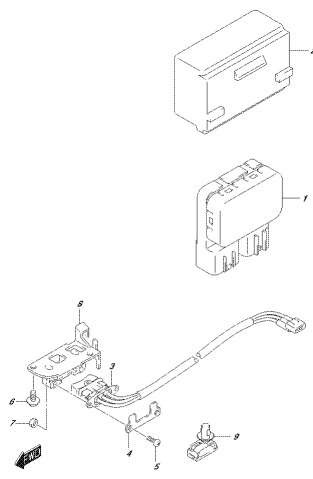


DF28L 304 PVL 622.327B
PIT SWITCH

FIG.334A

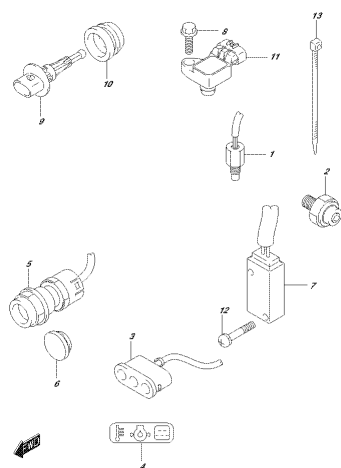


DF28L 304 PVL 622.334A
SEALING SWITCH

FIG.334B

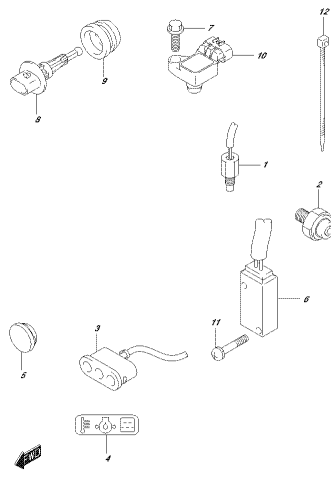


DF28L 304 PVL 622.334B
SEALING SWITCH

FIG.334C

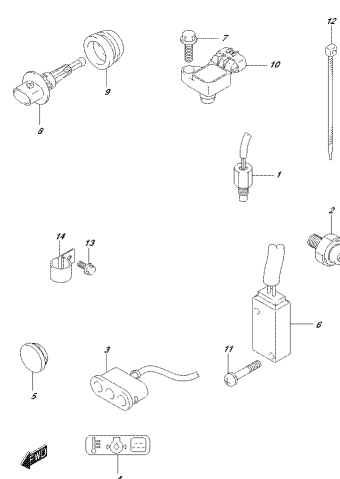


DF28L 304 PVL 622.334C
SEALING SWITCH

FIG.334D

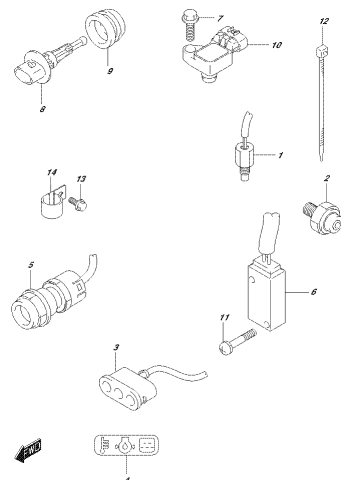


DF28L 304 PVL 622.334D
SEALING SWITCH

FIG.334E

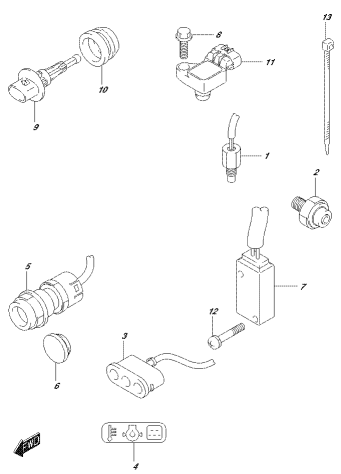


DF28L 304 PVL 622.334E
SEALING SWITCH

FIG.335A

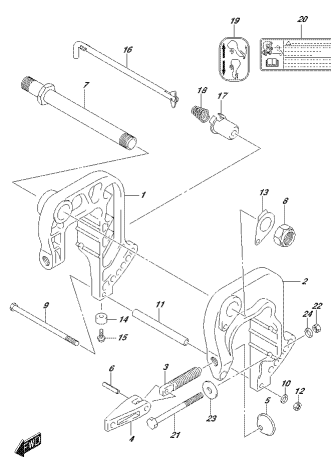


DF28L 304 PVL 622.335A
CLAMP BRACKET

FIG.335B

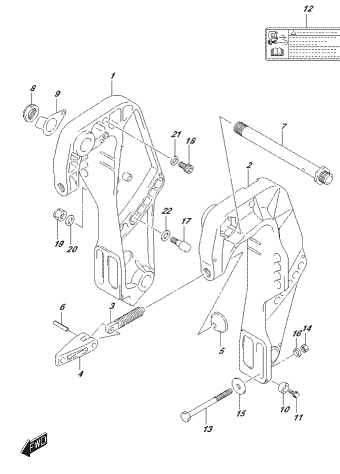


DF28L 304 PVL 622.335B
CLAMP BRACKET

FIG.335C

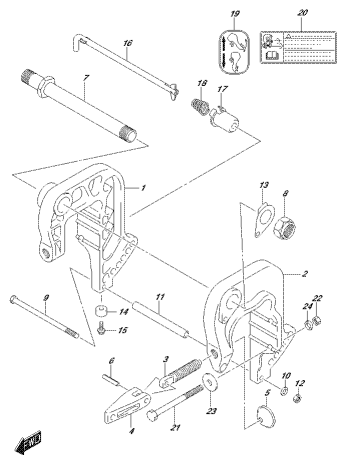


DF25M_354_P01_022_335C
DANIEL BRACHET

FIG.335D

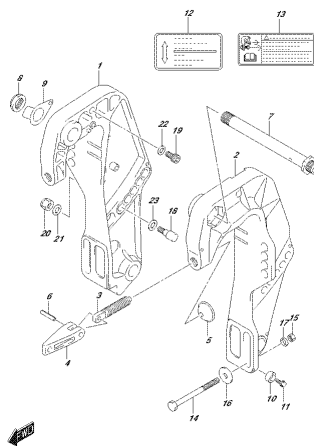


DF25M_354_P01_022_335D
DANIEL BRACHET

FIG.336A

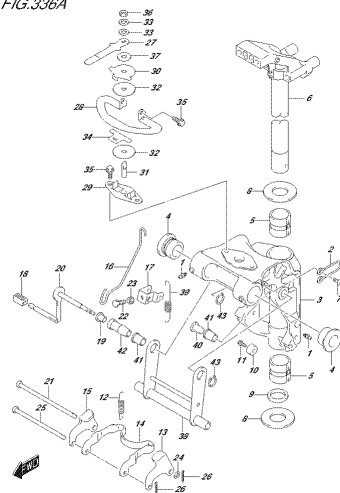


DF25M_354_P01_022_336A
DANIEL BRACHET

FIG.336B

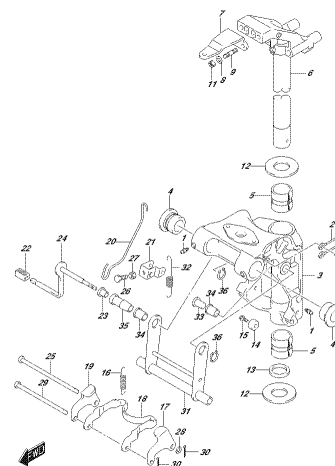


DF25M_354_P01_022_336B
DANIEL BRACHET

FIG.336C

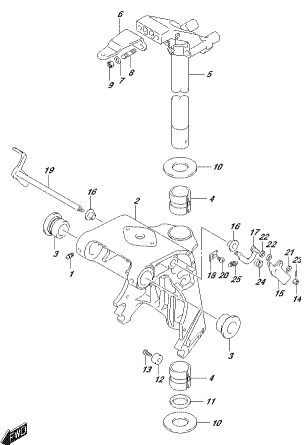


DF25M_354_P01_022_336C
DANIEL BRACHET

FIG.336D

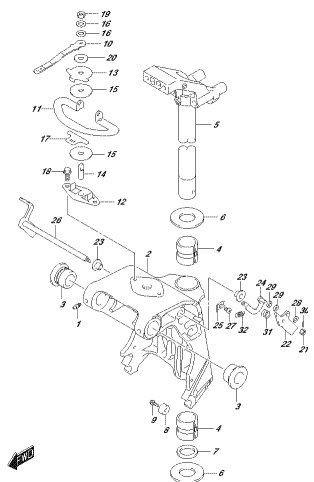


DF25M_354_P01_022_336D
DANIEL BRACHET

FIG.336E

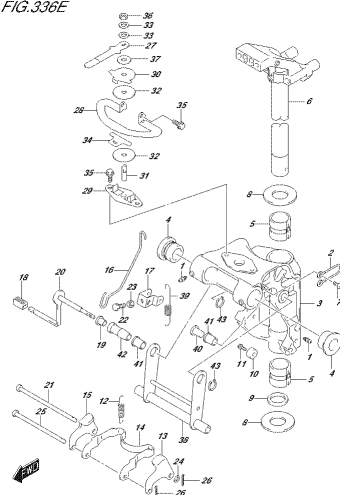

DF25M_354_P01_022_336E
DANIEL BRACHET

FIG.336F

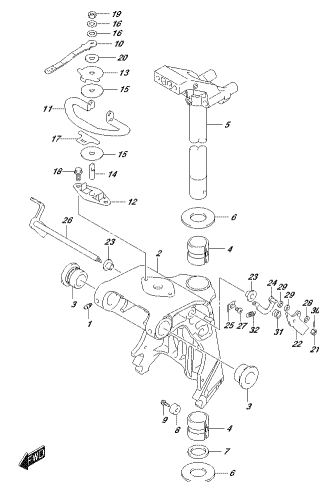

DF25M_354_P01_022_336F
DANIEL BRACHET

FIG.338A

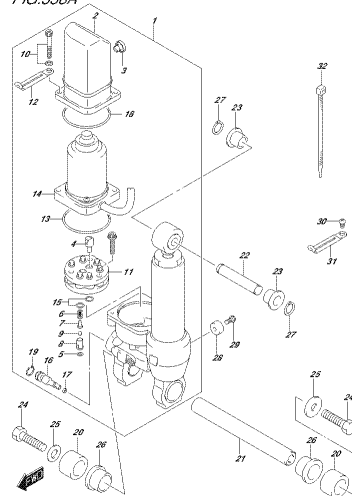


FIG.338A 30A PFC 652 338A
2-STROKE

FIG.339A

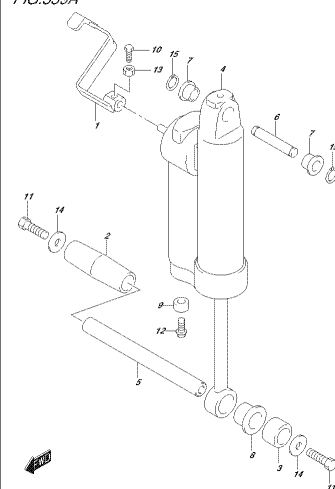


FIG.339A 30A PFC 652 339A
2-STROKE

FIG.340A

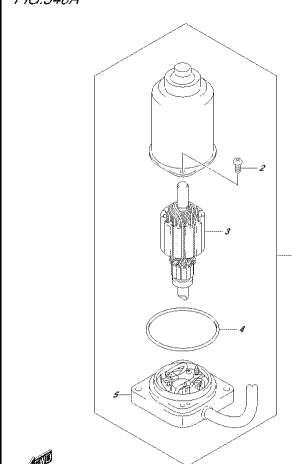


FIG.340A 30A PFC 652 340A
2-STROKE

FIG.401A

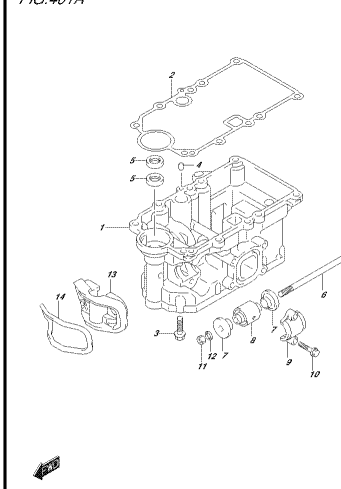


FIG.401A 30A PFC 652 401A
2-STROKE

FIG.405A

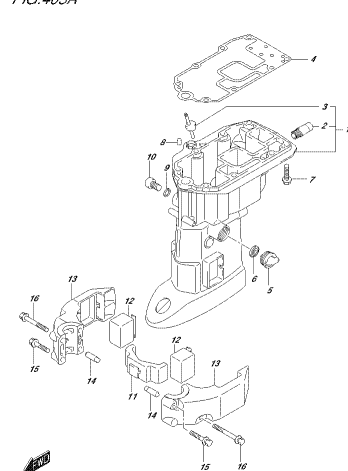


FIG.405A 30A PFC 652 405A
2-STROKE

FIG.405B

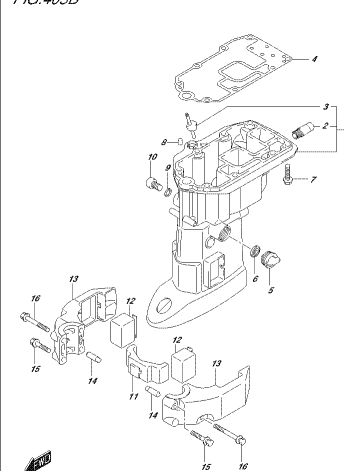


FIG.405B 30A PFC 652 405B
2-STROKE

FIG.405C

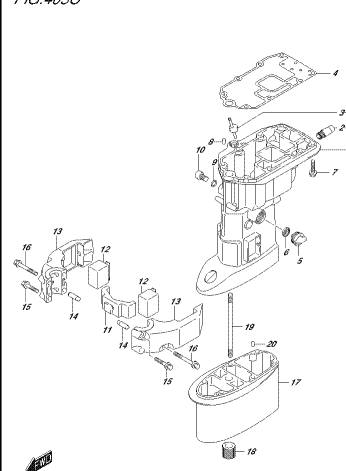


FIG.405C 30A PFC 652 405C
2-STROKE

FIG.407A


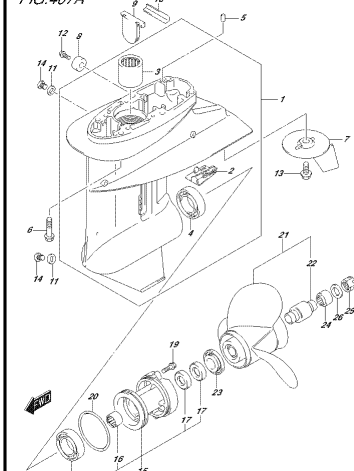



FIG.407A 30A PFC 652 407A
2-STROKE

FIG.407B

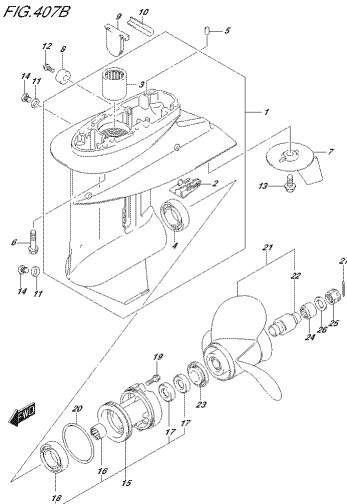


DF250L_S&A_P01_G02_407B
SEAFOUR

FIG.407C

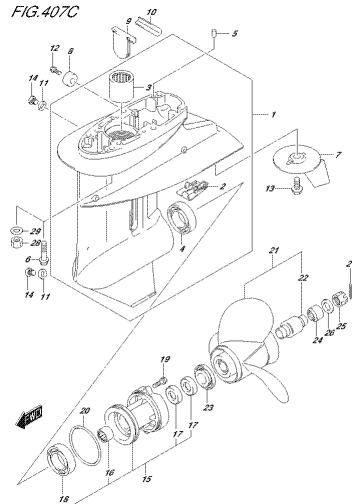


DF250L_S&A_P01_G02_407C
SEAFOUR

FIG.410A

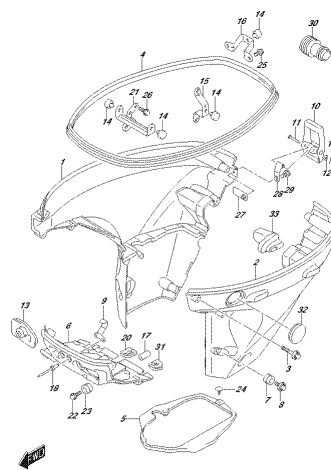


DF250L_S&A_P01_G02_410A
SIDE COVER

FIG.410B

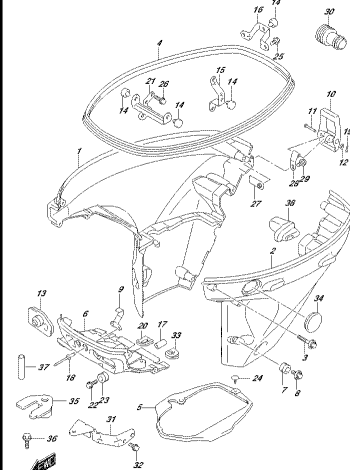


DF250L_S&A_P01_G02_410B
SIDE COVER

FIG.410C

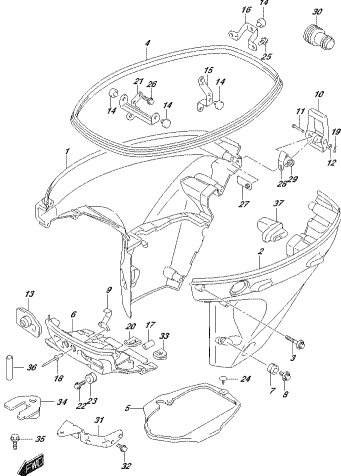


DF250L_S&A_P01_G02_410C
SIDE COVER

FIG.410D

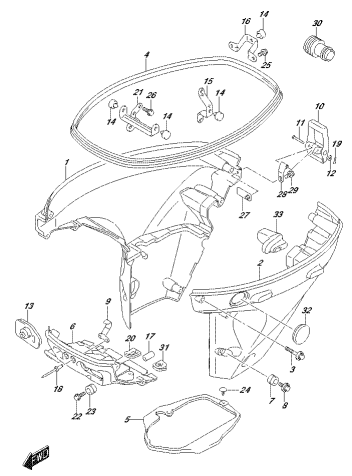


DF250L_S&A_P01_G02_410D
SIDE COVER

FIG.410E

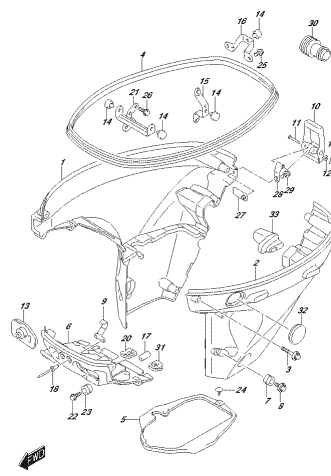


DF250L_S&A_P01_G02_410E
SIDE COVER

FIG.420A

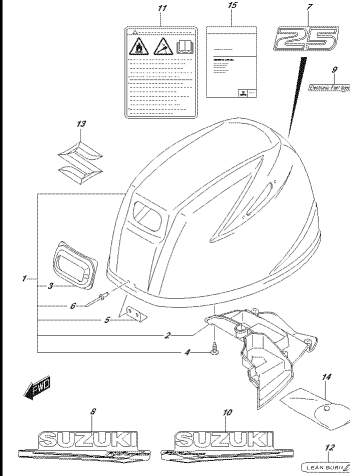


DF250L_S&A_P01_G02_420A
EXTERNAL COVER

FIG. 420B

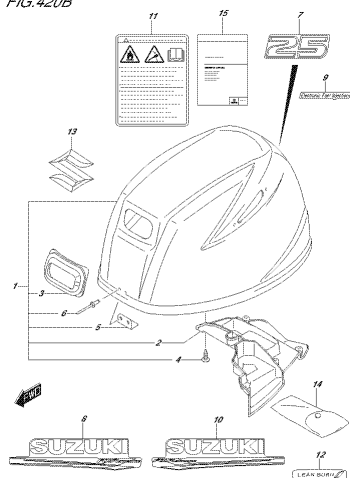


DF254 304 POL 022 4308
ENGINE COVER

FIG. 420C

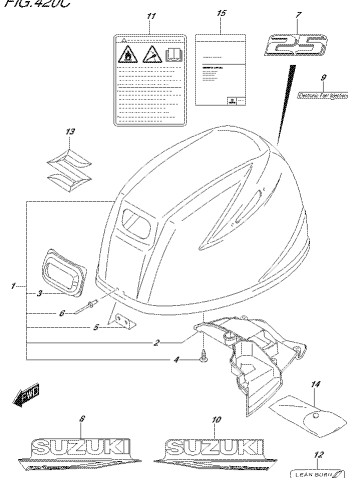


DF254_304_P01_032_430C
ENGINE COVER

FIG. 420D

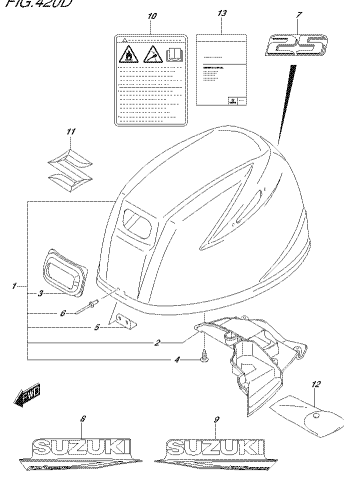


DF254_304_P01_032_4320
ENGINE COVER

FIG. 420E

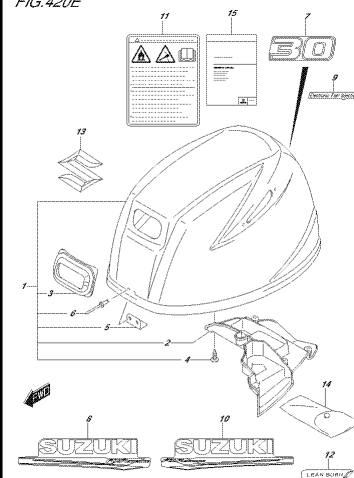


ENGINE COVER

FIG. 420F

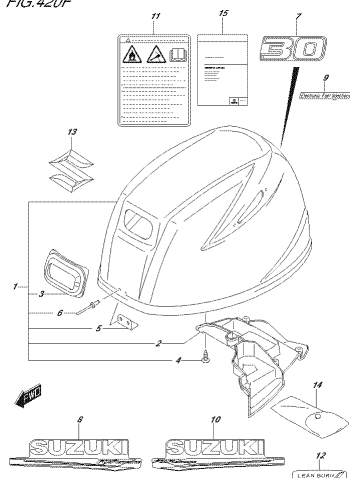


DF25A 30A POL 022 430F
ENGINE COVER

FIG. 420G

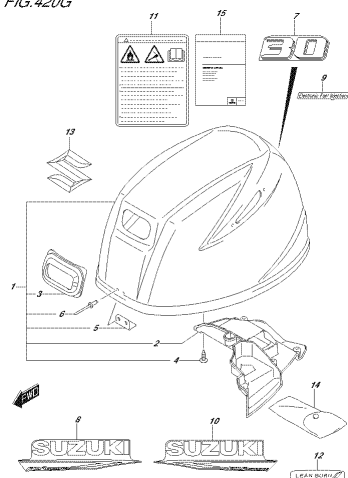


DF25A_30A_P01_022_A30G
ENGINE COVER

FIG. 420H

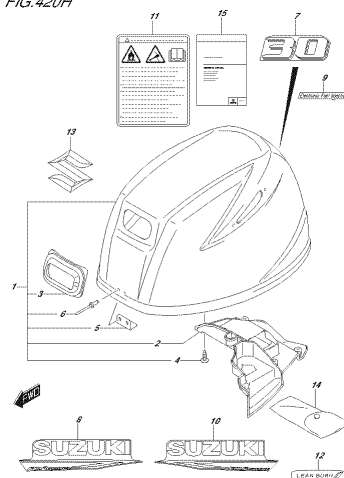

DF25A 30A P01 032 430H
ENGINE COVER

FIG. 420J

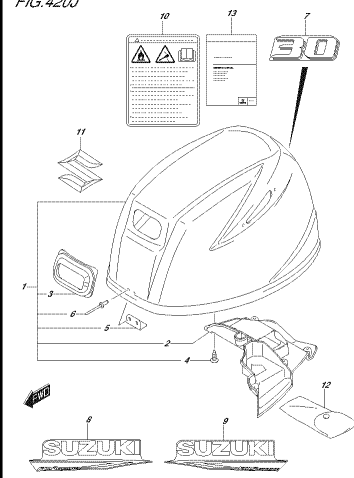

DF25A 3M P01 022 4321
ENGINE COVER

FIG.432A

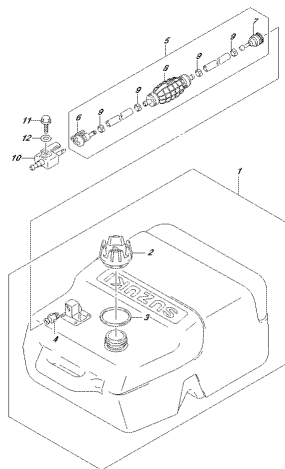


FIG. 432A, FIG. 432A, 432A
ELEC. 1025

FIG.442A

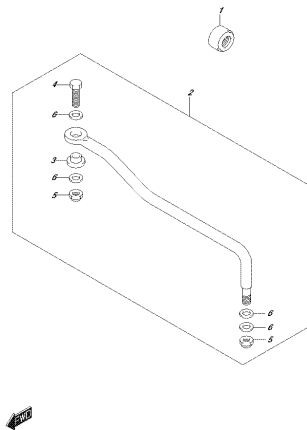


FIG. 442A, FIG. 442A, 442A
ELEC. 1025

FIG.444A

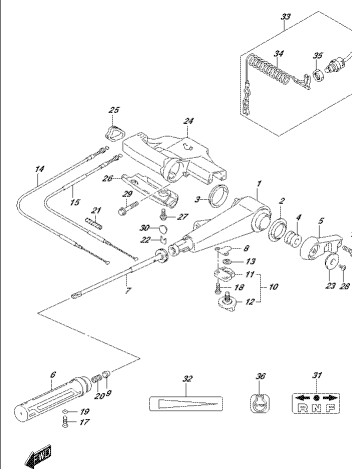


FIG. 444A, FIG. 444A, 444A
ELEC. 1025

FIG.444B

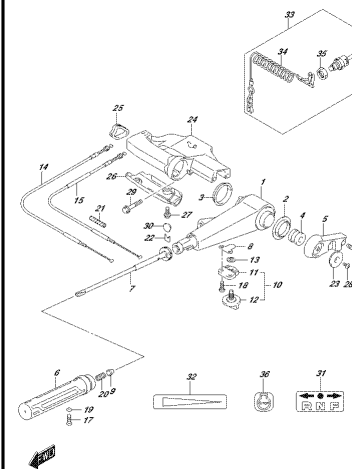


FIG. 444B, FIG. 444B, 444B
ELEC. 1025

FIG.450A

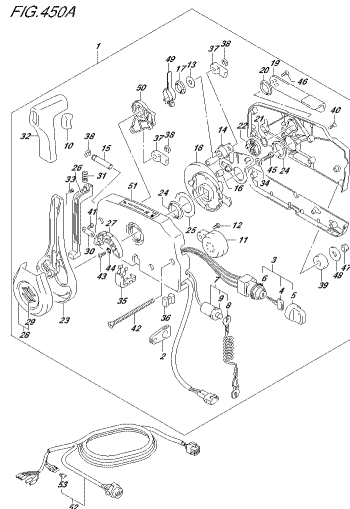


FIG. 450A, FIG. 450A, 450A
ELEC. 1025

FIG.450B

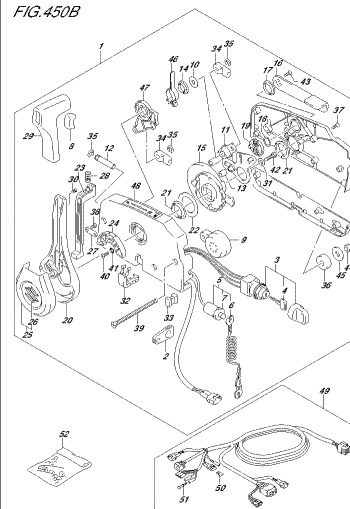


FIG. 450B, FIG. 450B, 450B
ELEC. 1025

FIG.450C

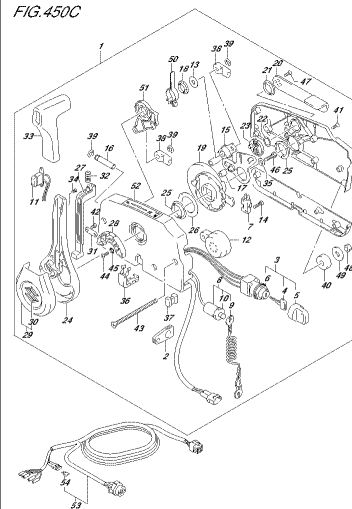


FIG. 450C, FIG. 450C, 450C
ELEC. 1025

FIG.450D

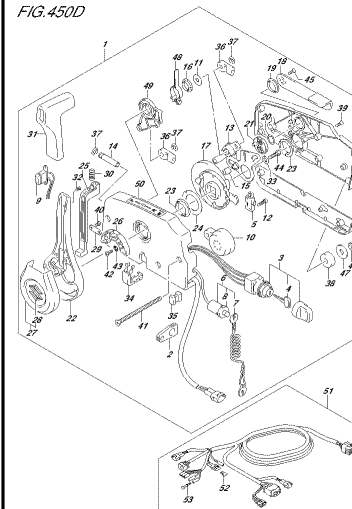


FIG. 450D, FIG. 450D, 450D
ELEC. 1025

FIG.501A

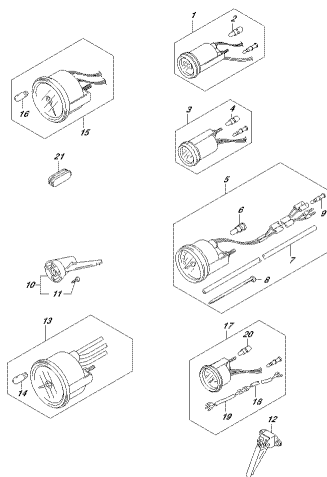


FIG. 501A, FIG. 502, 501A
OPTIMIZING CONTROL

FIG.501B

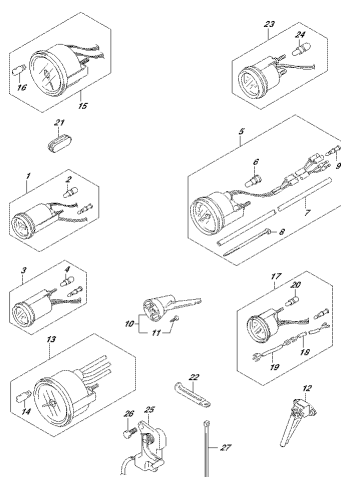


FIG. 501B, FIG. 502, 501B
OPTIMIZING CONTROL

FIG.508A

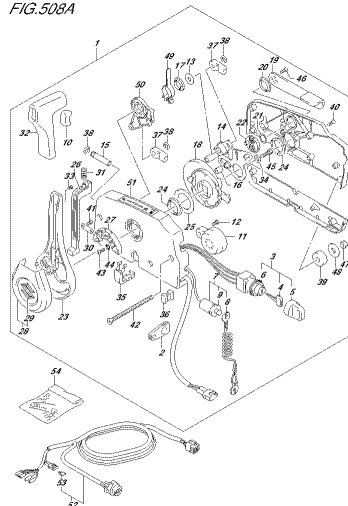


FIG. 508A, FIG. 502, 508A
OPTIMIZING CONTROL

FIG.508B

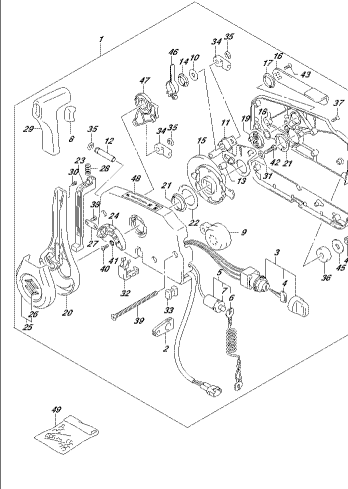


FIG. 508B, FIG. 502, 508B
OPTIMIZING CONTROL

FIG.508C

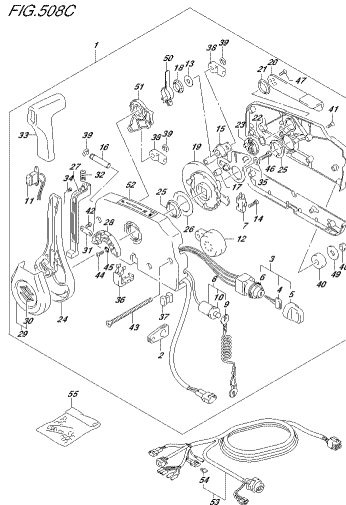


FIG. 508C, FIG. 502, 508C
OPTIMIZING CONTROL

FIG.508D

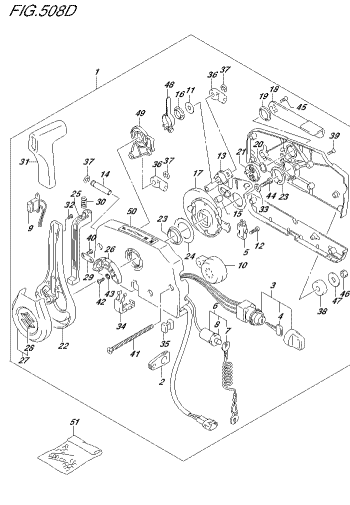


FIG. 508D, FIG. 502, 508D
OPTIMIZING CONTROL

FIG.513A

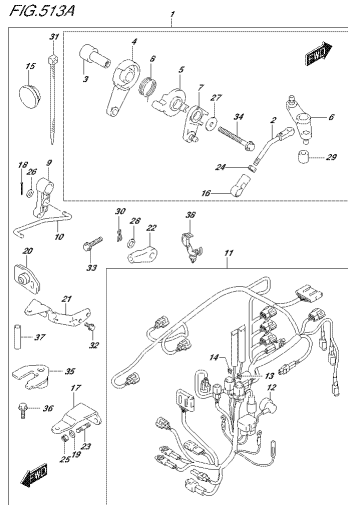


FIG. 513A, FIG. 502, 513A
OPTIMIZING CONTROL PARTS

FIG.513B

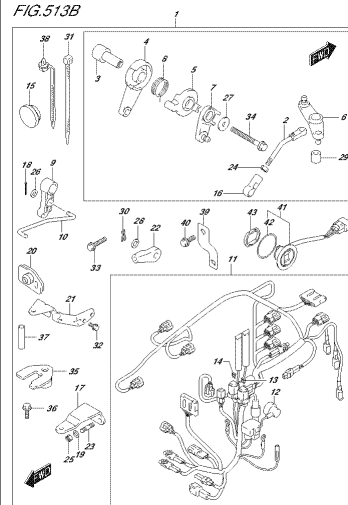


FIG. 513B, FIG. 502, 513B
OPTIMIZING CONTROL PARTS

FIG.515A

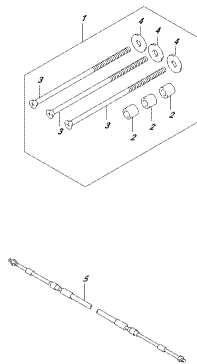


FIG.515A
OPTICAL FIBER CABLE
OPTICAL FIBER CABLE

FIG.517A

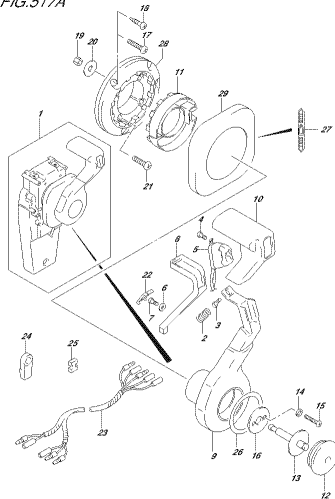


FIG.517A
OPTICAL FIBER CABLE
OPTICAL FIBER CABLE

FIG.518A

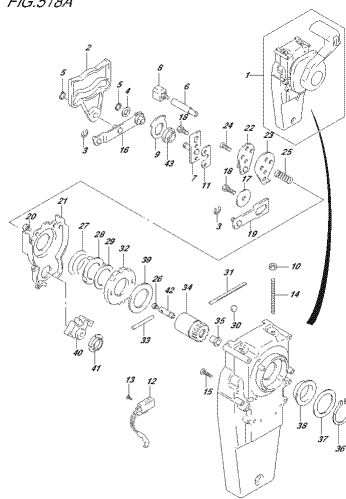


FIG.518A
OPTICAL FIBER CABLE
OPTICAL FIBER CABLE

FIG.519A




FIG.519A
OPTICAL FIBER CABLE
OPTICAL FIBER CABLE

FIG.521A




FIG.521A
OPTICAL FIBER CABLE
OPTICAL FIBER CABLE

FIG.521B

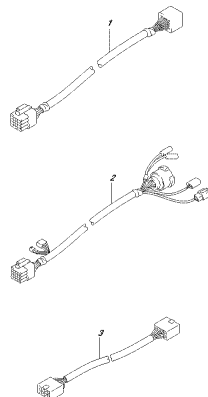


FIG.521B
OPTICAL FIBER CABLE
OPTICAL FIBER CABLE

FIG.530A

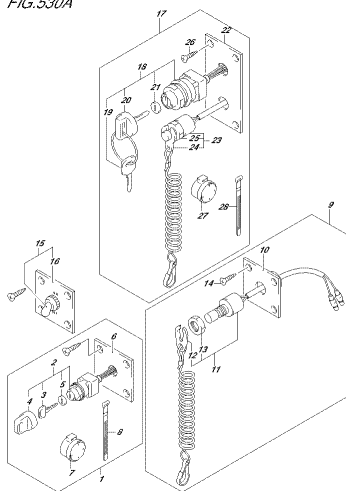


FIG.530A
OPTICAL FIBER CABLE
OPTICAL FIBER CABLE

FIG.530B

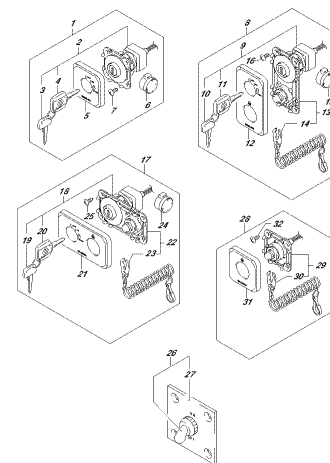


FIG.530B
OPTICAL FIBER CABLE
OPTICAL FIBER CABLE

FIG.544A

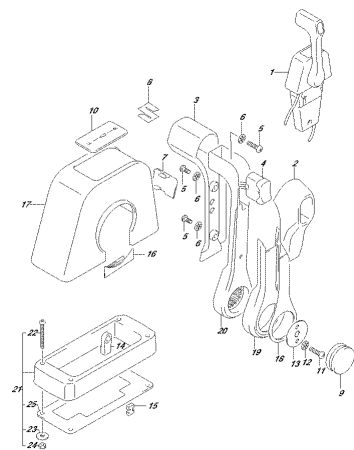


FIG.544A
REMOTE CONTROL ASSY SINGLE (1)

FIG.545A

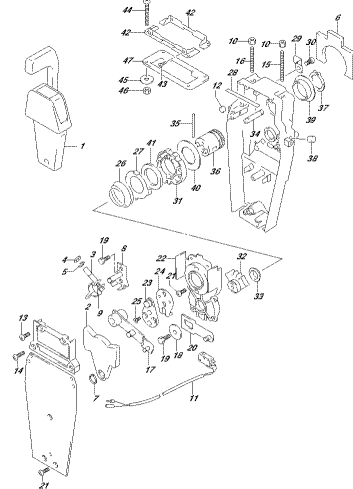


FIG.545A
REMOTE CONTROL ASSY SINGLE (2)

FIG.553A

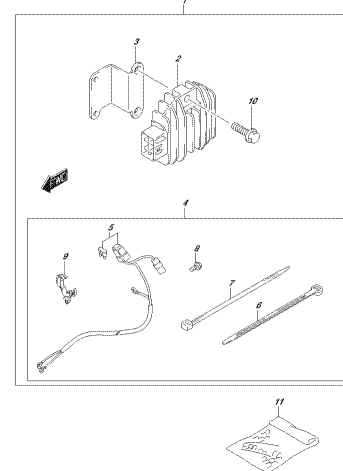


FIG.553A
REMOTE CONTROL ASSY SINGLE (3)

FIG.561A

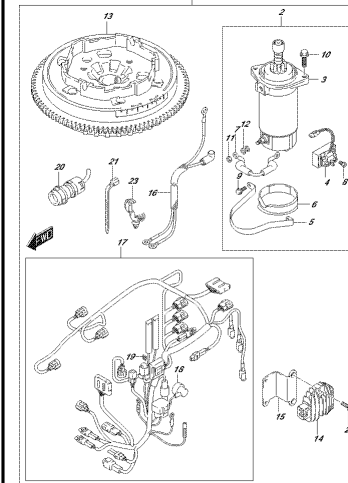


FIG.561A
REMOTE CONTROL ASSY SINGLE (4)

FIG.575A

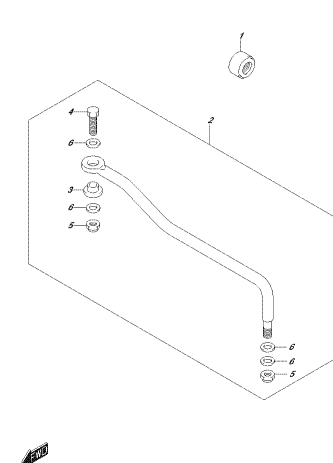


FIG.575A
REMOTE CONTROL ASSY SINGLE (5)

FIG.600A

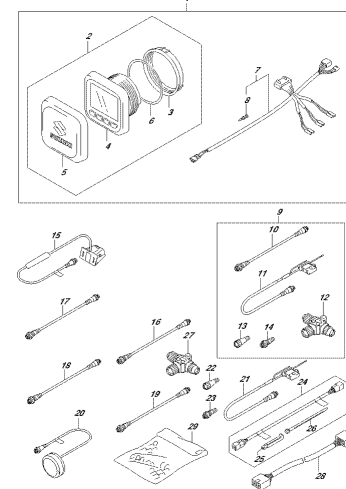


FIG.600A
REMOTE CONTROL ASSY SINGLE (6)

FIG.600B

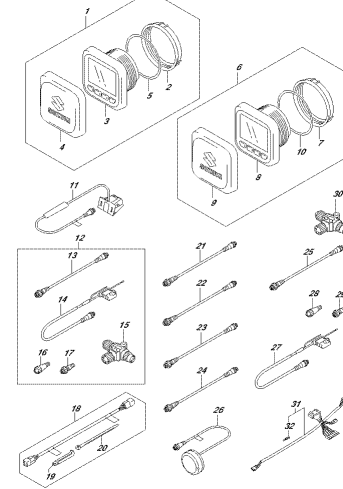


FIG.600B
REMOTE CONTROL ASSY SINGLE (7)

FIG.111A

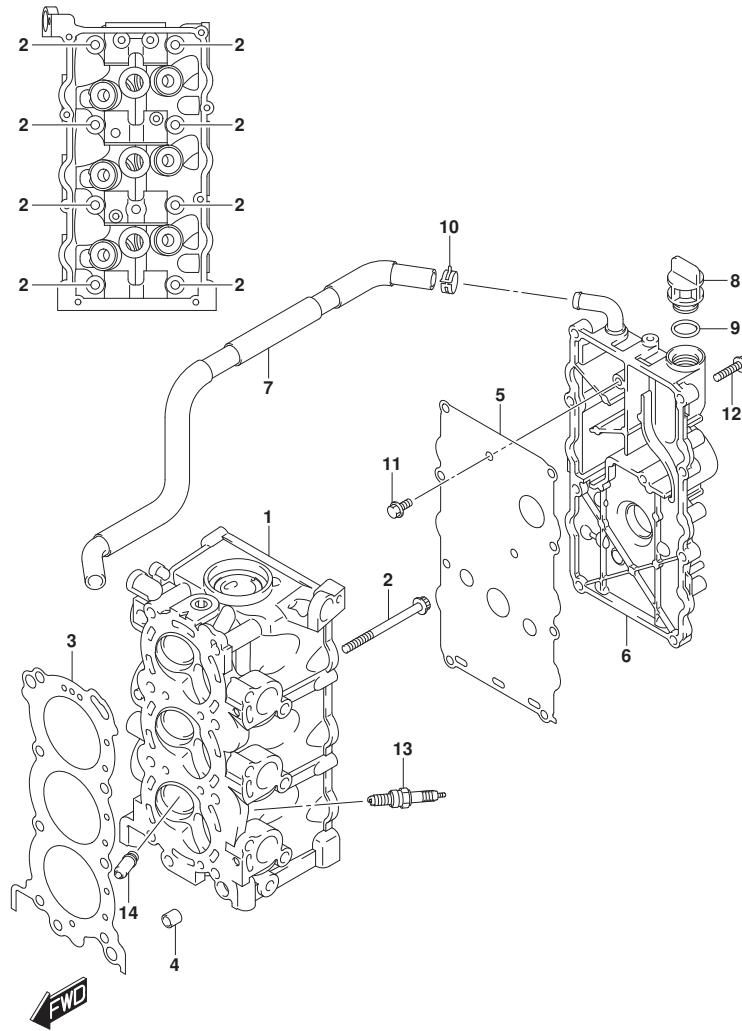


FIG.111A (1-B-2) CYLINDER HEAD

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	11110-94L00	HEAD, CYLINDER	1	
2	11119-94L00	BOLT, CYLINDER HEAD NO.1	8	
3	11141-94L00	GASKET, CYLINDER HEAD	1	
4	04211-11129	PIN (11X12)	2	
5	11162-94L00	GASKET, CYLINDER HEAD COVER	1	
6	11170-94L00	COVER, CYLINDER HEAD	1	
7	11174-94L00	HOSE, BREATHER	1	
8	11382-93E00	CAP, OIL FILLER	1	
9	09280-17003	O RING (D:3.1,ID:16.8)	1	
10	09401-15414	CLIP	1	
11	01547-0612A	BOLT	2	
12	01550-0625C	BOLT	8	
13	09482-00661	SPARK PLUG (MR6K-9)	3	NGK
14	11115-94L00-001	GUIDE, VALVE (OS)	6	OPT

FIG.113A

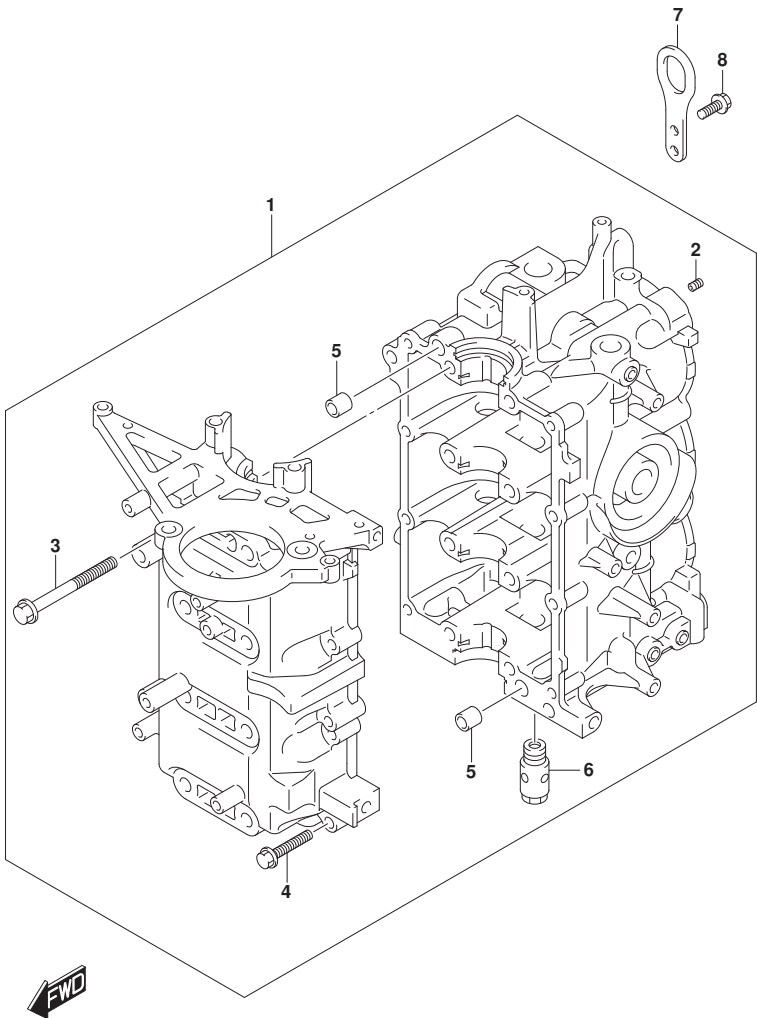


FIG.113A (1-B-3) CYLINDER BLOCK

REF NO.	PART NO.	DESCRIPTION	Q'TY		REMARKS
1-1	11301-94L20	BLOCK SET, CYLINDER	1	020,021	
1-2	11301-94L30	BLOCK SET, CYLINDER	1	022	
2	11112-96L00	.PLUG, OIL VENTURI	1		
3	09119-08L01	.BOLT (8X77)	8		
4	01550-06357	.BOLT	8		
5	04211-11129	.PIN (11X12)	2		
6	16440-11D00	.REGULATOR ASSY, ENGINE OIL (6.5K)	1		
7	11291-94L00	HOOK, ENGINE	1		
8	01550-0820C	BOLT	2		

FIG.116A

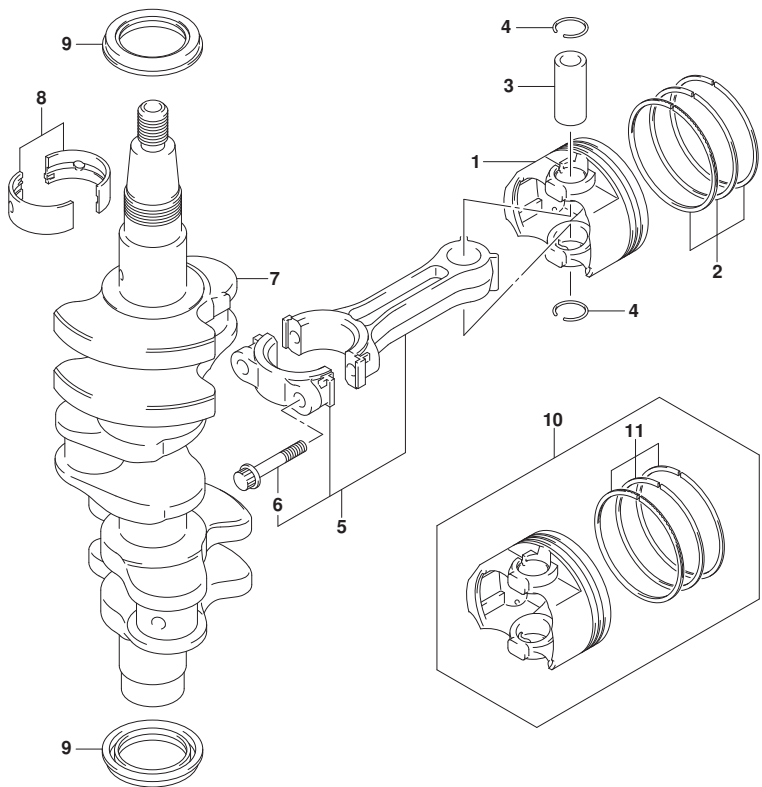


FIG.116A (1-B-4) CRANKSHAFT

REF NO.	PART NO.	DESCRIPTION	Q'TY		REMARKS
1	12111-89L10-0B0	PISTON	3		
2-1	12140-89L00	RING SET, PISTON	3	020	
2-2	12140-89L10	RING SET, PISTON	3	021,022	
3	12151-89L00	PIN, PISTON	3		
4	09381-16001	CIRCLIP (OD:18)	6		
5	12160-89L11	CONNROD ASSY	3		
6	12163-89L02	.BOLT, CONNROD	6		
7	12220-94L00	CRANKSHAFT	1		
8	12341-89L10	BEARING, CRANKSHAFT	8		
9	09283-32048	OIL SEAL (32X44X6.5)	2		
10-1	12100-89L20-050	PISTON SET (OS:0.50)	3	020	
				OS,OPT	
10-2	12100-89L30-050	PISTON SET (OS:0.50)	3	021,022	
				OS,OPT	
11-1	12140-89L00-050	.RING SET, PISTON (OS:0.50)	3	020	
				OS,OPT	
11-2	12140-89L10-050	.RING SET, PISTON (OS:0.50)	3	021,022	
				OS,OPT	

FIG.120A

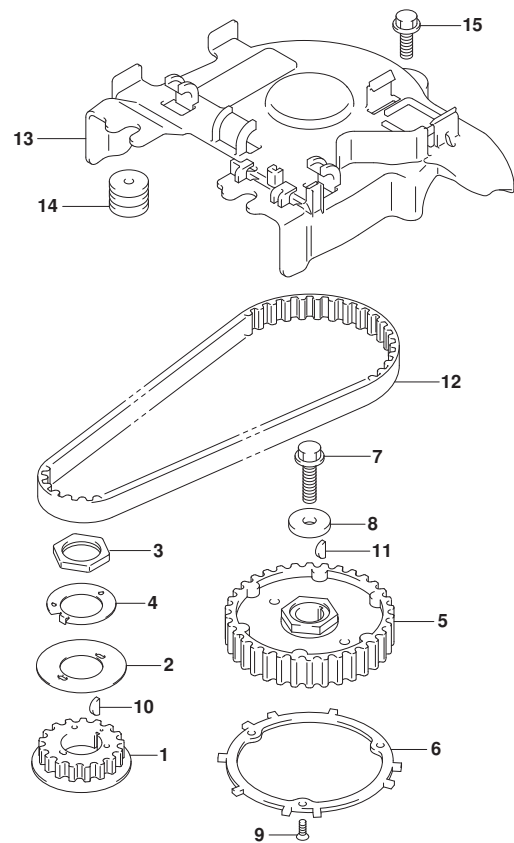


FIG.120A (1-B-5) TIMING BELT

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	12631-94L00	PULLEY, CRANKSHAFT	1	
2	12635-89L00	GUIDE, TIMING BELT	1	
3	12637-89L00	NUT, TIMING PULLEY	1	
4	12638-89L00	LOCK WASHER, PULLEY NUT	1	
5	12741-94L00	PULLEY, CAMSHAFT	1	
6	12744-94L00	PLATE, SENSING	1	
7	09103-08458	BOLT (8X30)	1	
8	09160-09020	WASHER (9X26X4)	1	
9	02122-04127	SCREW	3	
10	08341-31039	KEY	1	
11	08341-31039	KEY	1	
12	12761-94L10	BELT, TIMING	1	
13	12764-94L00	COVER, TIMING BELT	1	
14	09320-05019	CUSHION	2	
15	01550-0620C	BOLT	1	



FIG.121A

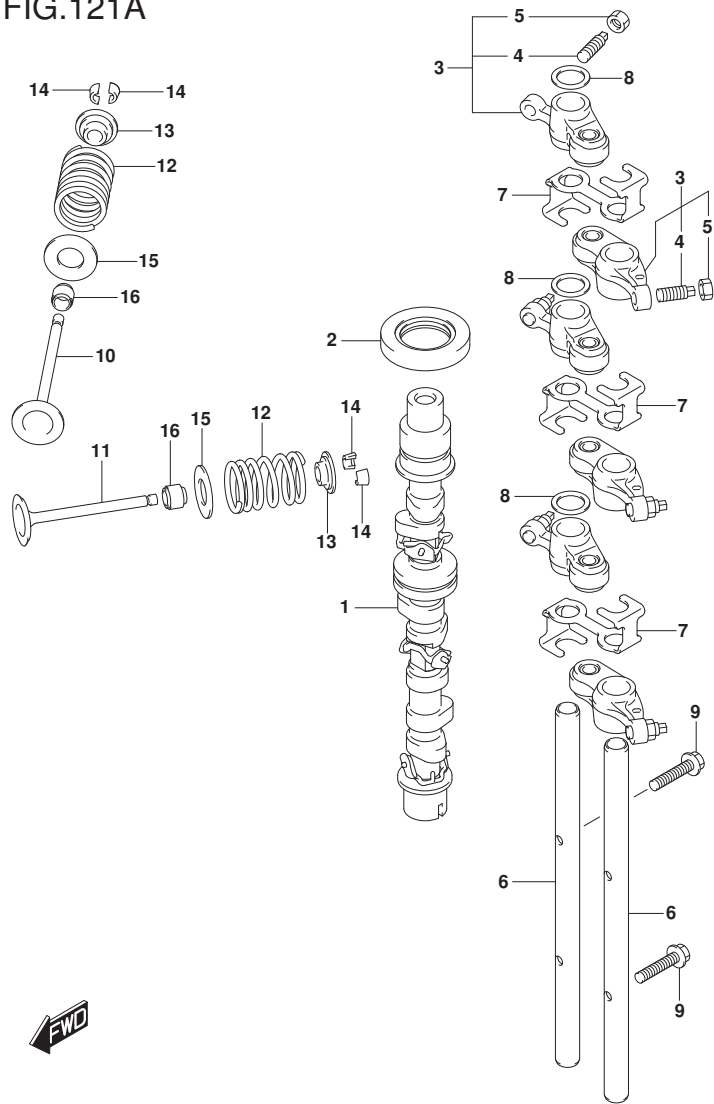


FIG.121A (1-B-6) CAMSHAFT

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	12700-94L01	CAMSHAFT ASSY	1	
2	09283-27022	OIL SEAL (27X46X6)	1	
3	12840-94L00	ARM, ROCKER	6	
4	12842-09J00	.SCREW, TAPPET ADJUSTING	6	
5	12843-27A00	.NUT, TAPPET ADJUSTING	6	
6	12861-94L00	SHAFT, ROCKER ARM	2	
7	12862-94L00	RETAINER, ROCKER ARM	3	
8	09164-12021	WASHER (37.3X52X1)	3	
9	01547-0625A	BOLT	2	
10	12911-94L10	VALVE, INTK	3	
11	12915-94L60	VALVE, EXH	3	
12	12921-94L00	SPRING, VALVE	6	
13	12931-78G00	RETAINER, VALVE SPRING	6	
14	12932-50MA0	COTTER, VALVE	12	
15	12933-71C00	SEAT, VALVE SPRING	6	
16	09289-05008	OIL SEAL (5X10.5X8.4)	6	

FIG.122A

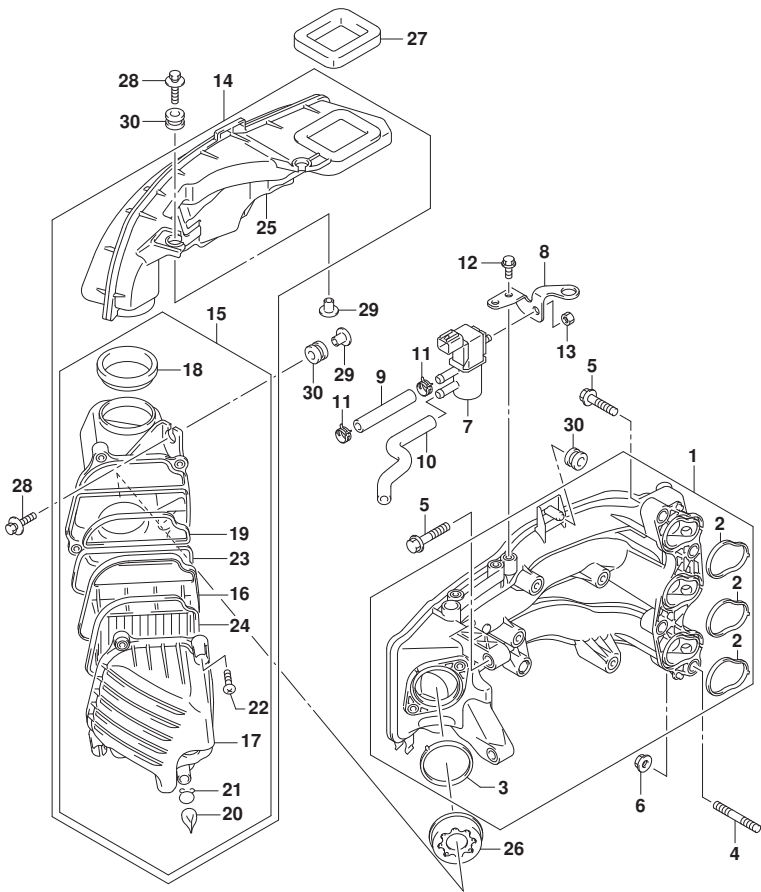


FIG.122A (1-B-7) INTAKE MANIFOLD (020:(DF25A,DF25AT,DF25ATH))

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13110-94L00	MANIFOLD, INTAKE	1	
2	13119-94L00	.GASKET, INTAKE MANIFOLD	3	
3	13125-94L00	.GASKET, THROTTLE BODY	1	
4	01421-08357	STUD BOLT	2	
5	01550-0835C	BOLT	4	
6	08316-10087	NUT	2	
7	18117-78K00	VALVE, EVAP CSTR PURGE	1	
8	18119-94L00	BRACKET, IAC VALVE	1	
9	09355-70125-600	HOSE (7X12X600)	1	L:600->70
10	18173-94L01	HOSE, IAC VALVE NO.2	1	
11	09401-11423	CLIP	2	
12	01550-0612C	BOLT	2	
13	08316-10067	NUT	1	
14	13800-94L01	SILENCER ASSY	1	
15	13810-94L01	.CLEANER, SILENCER	1	
16	13711-94L00	..ELEMENT ASSY, AIR CLEANER	1	
17	13812-94L01	..CAP, AIR CLEANER	1	
18	13813-94L00	..SEAL, AIR CLEANER	1	
19	13814-94L00	..GASKET, CASE 1	1	
20	13815-94L00	..CAP, DRAIN	2	
21	13816-94L00	..CLIP, CAP	2	
22	13817-94L00	..SCREW	4	
23	13818-94L00	..GASKET, CASE 2	1	
24	13819-94L00	..GASKET, CAP	1	
25	13841-94L00	.DUCT, SILENCER	1	
26	13820-94L00	HOLDER, RESTRICTOR	1	
27	13851-94L00	SEAL, AIR INTAKE	1	
28	09116-06526	BOLT (6X30)	4	
29	09169-06075	WASHER	4	
30	09320-09059	CUSHION (9X18X14)	5	

DF25A P01
DF25AT P01
DF25ATH P01

FIG.122B

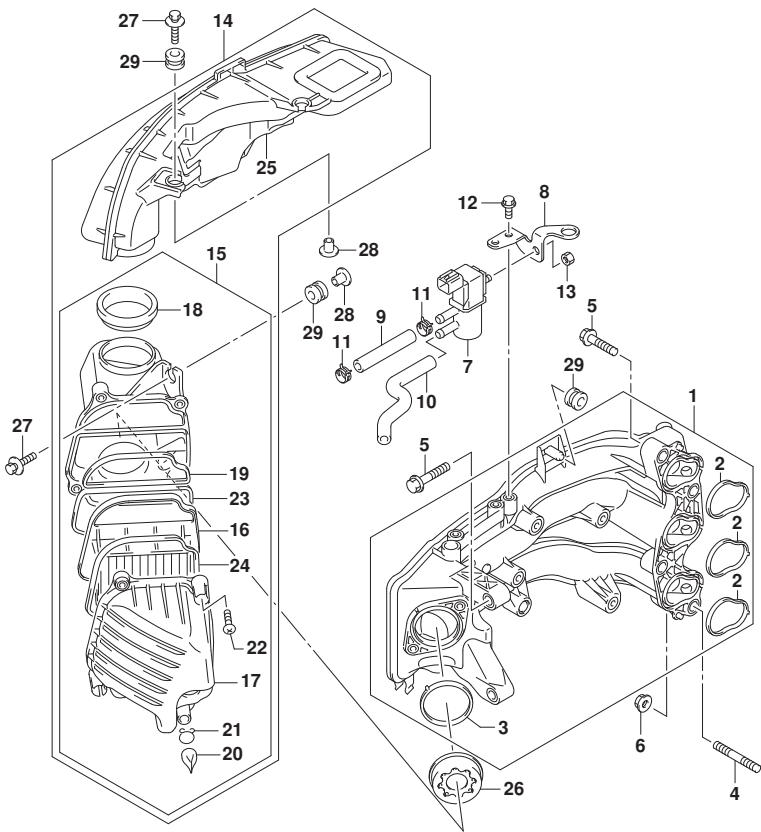


FIG.122B (1-B-8) INTAKE MANIFOLD (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13110-94L00	MANIFOLD, INTAKE	1	
2	13119-94L00	.GASKET, INTAKE MANIFOLD	3	
3	13125-94L00	.GASKET, THROTTLE BODY	1	
4	01421-08357	STUD BOLT	2	
5	01550-0835C	BOLT	4	
6	08316-10087	NUT	2	
7	18117-78K00	VALVE, EVAP CSTR PURGE	1	
8	18119-94L00	BRACKET, IAC VALVE	1	
9	09355-70125-600	HOSE (7X12X600)	1	L:600->70
10	18173-94L01	HOSE, IAC VALVE NO.2	1	
11	09401-11423	CLIP	2	
12	01550-0612C	BOLT	2	
13	08316-10067	NUT	1	
14	13800-94L10	SILENCER ASSY	1	
15	13810-94L10	.CASE, SILENCER	1	
16	13711-94L10	..ARRESTER, FLAME	1	
17	13812-94L01	..CAP, AIR CLEANER	1	
18	13813-94L00	..SEAL, AIR CLEANER	1	
19	13814-94L00	..GASKET, CASE 1	1	
20	13815-94L00	..CAP, DRAIN	2	
21	13816-94L00	..CLIP, CAP	2	
22	13817-94L00	..SCREW	4	
23	13818-94L00	..GASKET, CASE 2	1	
24	13819-94L00	..GASKET, CAP	1	
25	13841-94L00	.DUCT, SILENCER	1	
26-1	13820-94L00	HOLDER, RESTRICTOR	1	021
26-2	13820-94L10	HOLDER, RESTRICTOR	1	022
27	09116-06526	BOLT (6X30)	4	
28	09169-06075	WASHER	4	


NOTE : 021:(DF25A,DF25AR,DF25AT,DF25ATH),022:(DF25A,DF25AT,DF25ATH)



FIG.122B

FIG.122B (1-B-9) INTAKE MANIFOLD (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
29	09320-09059	CUSHION (9X18X14)	5	

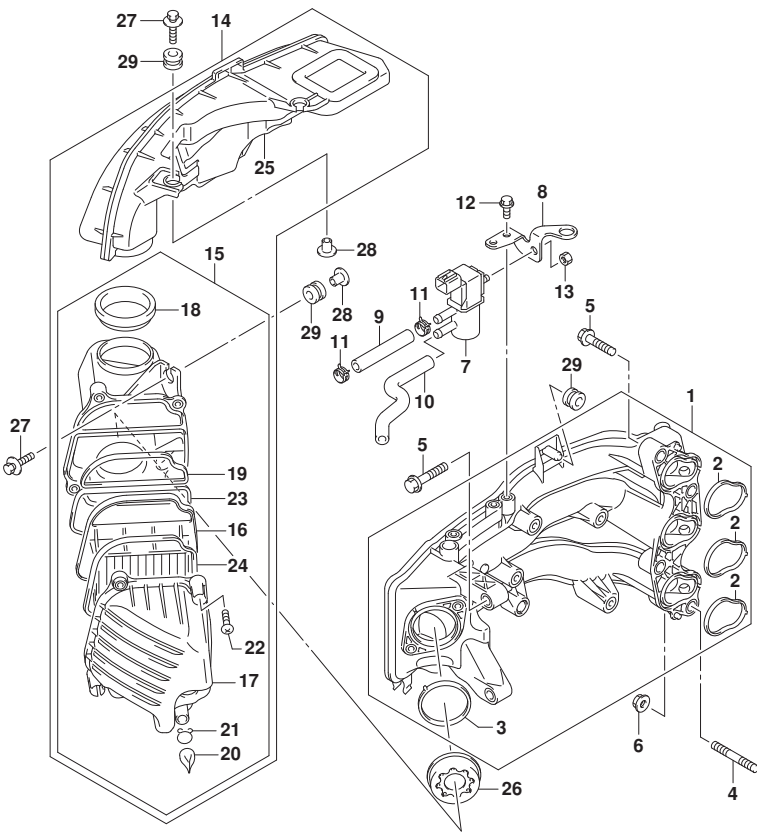

NOTE : 021:(DF25A,DF25AR,DF25AT,DF25ATH),022:(DF25A,DF25AT,DF25ATH)

- DF25A P01
- DF25AR P01
- DF25AT P01
- DF25ATH P01



FIG.122C

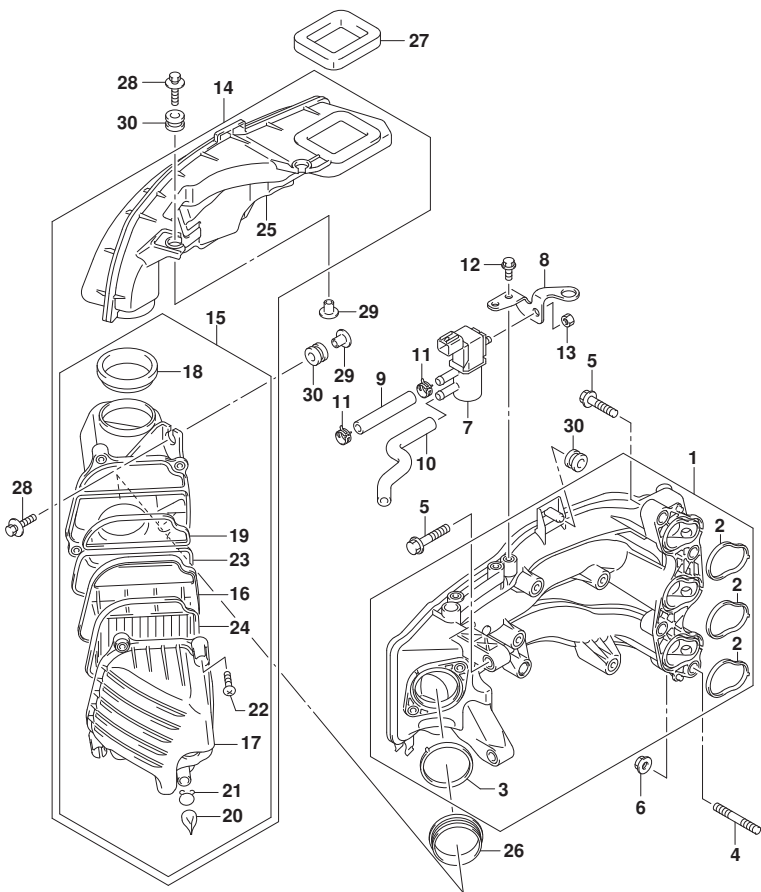


FIG.122C (1-B-10) INTAKE MANIFOLD (SEE NOTE)


REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13110-94L00	MANIFOLD, INTAKE	1	
2	13119-94L00	.GASKET, INTAKE MANIFOLD	3	
3	13125-94L00	.GASKET, THROTTLE BODY	1	
4	01421-08357	STUD BOLT	2	
5	01550-0835C	BOLT	4	
6	08316-10087	NUT	2	
7	18117-78K00	VALVE, EVAP CSTR PURGE	1	
8	18119-94L00	BRACKET, IAC VALVE	1	
9	09355-70125-600	HOSE (7X12X600)	1	L:600->70
10	18173-94L01	HOSE, IAC VALVE NO.2	1	
11	09401-11423	CLIP	2	
12	01550-0612C	BOLT	2	
13	08316-10067	NUT	1	
14	13800-94L01	SILENCER ASSY	1	
15	13810-94L01	.CLEANER, SILENCER	1	
16	13711-94L00	..ELEMENT ASSY, AIR CLEANER	1	
17	13812-94L01	..CAP, AIR CLEANER	1	
18	13813-94L00	..SEAL, AIR CLEANER	1	
19	13814-94L00	..GASKET, CASE 1	1	
20	13815-94L00	..CAP, DRAIN	2	
21	13816-94L00	..CLIP, CAP	2	
22	13817-94L00	..SCREW	4	
23	13818-94L00	..GASKET, CASE 2	1	
24	13819-94L00	..GASKET, CAP	1	
25	13841-94L00	.DUCT, SILENCER	1	
26	13832-94L00	SEAL, SILENCER	1	
27	13851-94L00	SEAL, AIR INTAKE	1	
28	09116-06526	BOLT (6X30)	4	
29	09169-06075	WASHER	4	

NOTE : 020:(DF30A,DF30AR,DF30AT,DF30ATH,DF30AQ)

FIG.122C

FIG.122C (1-B-11) INTAKE MANIFOLD (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
30	09320-09059	CUSHION (9X18X14)	5	

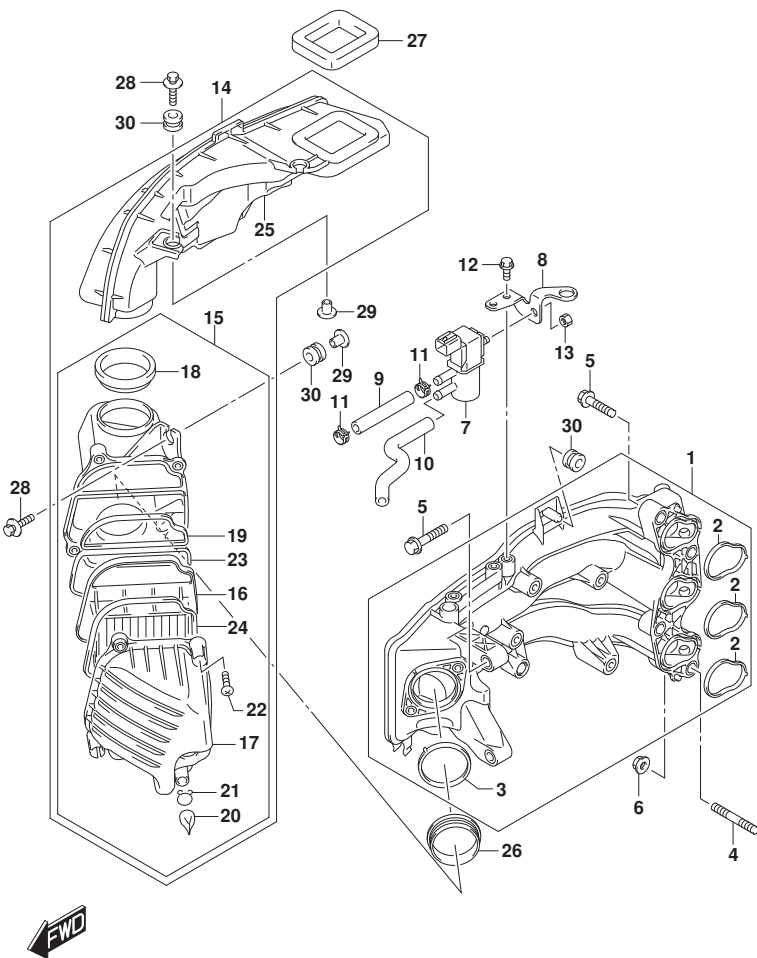

NOTE : 020:(DF30A,DF30AR,DF30AT,DF30ATH,DF30AQ)

- DF30A P40
- DF30AQ P01
- DF30AR P01
- DF30AT P01
- DF30ATH P01

FIG.122D

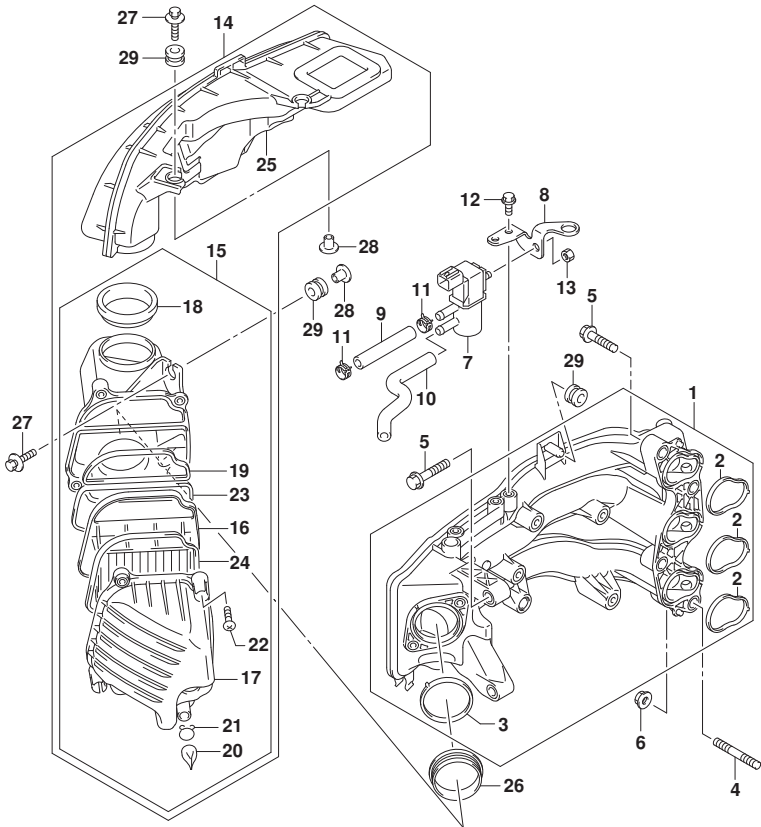


FIG.122D (1-B-12) INTAKE MANIFOLD (SEE NOTE)


REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13110-94L00	MANIFOLD, INTAKE	1	
2	13119-94L00	.GASKET, INTAKE MANIFOLD	3	
3	13125-94L00	.GASKET, THROTTLE BODY	1	
4	01421-08357	STUD BOLT	2	
5	01550-0835C	BOLT	4	
6	08316-10087	NUT	2	
7	18117-78K00	VALVE, EVAP CSTR PURGE	1	
8	18119-94L00	BRACKET, IAC VALVE	1	
9	09355-70125-600	HOSE (7X12X600)	1	L:600->70
10	18173-94L01	HOSE, IAC VALVE NO.2	1	
11	09401-11423	CLIP	2	
12	01550-0612C	BOLT	2	
13	08316-10067	NUT	1	
14	13800-94L10	SILENCER ASSY	1	
15	13810-94L10	.CASE, SILENCER	1	
16	13711-94L10	..ARRESTER, FLAME	1	
17	13812-94L01	..CAP, AIR CLEANER	1	
18	13813-94L00	..SEAL, AIR CLEANER	1	
19	13814-94L00	..GASKET, CASE 1	1	
20	13815-94L00	..CAP, DRAIN	2	
21	13816-94L00	..CLIP, CAP	2	
22	13817-94L00	..SCREW	4	
23	13818-94L00	..GASKET, CASE 2	1	
24	13819-94L00	..GASKET, CAP	1	
25	13841-94L00	.DUCT, SILENCER	1	
26-1	13832-94L00	SEAL, SILENCER	1	021
26-2	13832-94L10	SEAL, SILENCER	1	022
27	09116-06526	BOLT (6X30)	4	
28	09169-06075	WASHER	4	

NOTE : (021,022):(DF30A,DF30AR,DF30AT,DF30ATH,DF30AQ)

FIG.122D

FIG.122D (1-B-13) INTAKE MANIFOLD (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
29	09320-09059	CUSHION (9X18X14)	5	

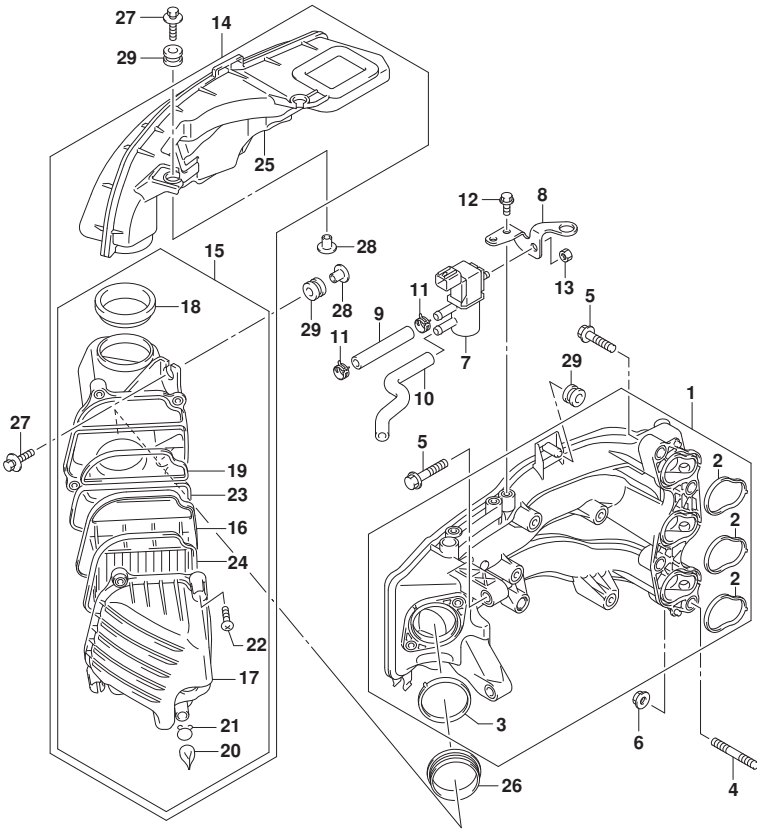

NOTE : (021,022):(DF30A,DF30AR,DF30AT,DF30ATH,DF30AQ)

- DF30A P40
- DF30AQ P01
- DF30AR P01
- DF30AT P01
- DF30ATH P01



FIG.139A

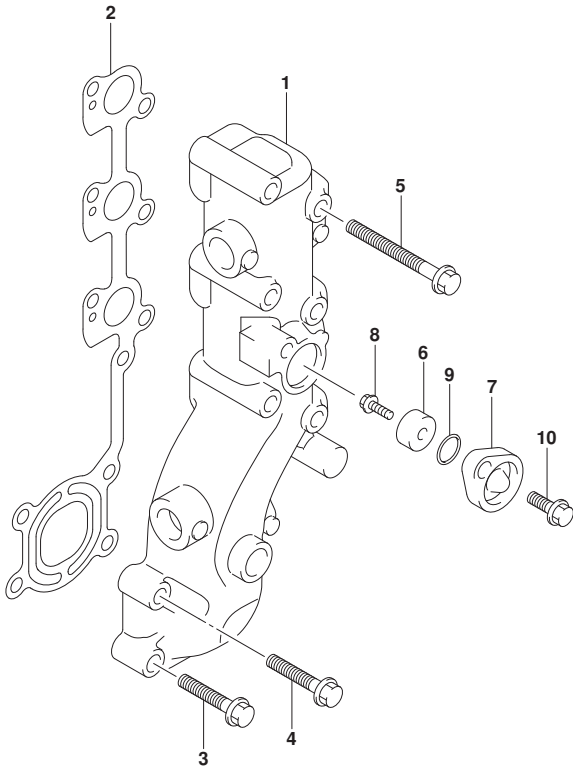


FIG.139A (1-B-14) EXHAUST MANIFOLD

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	14110-94L00	MANIFOLD, EXHAUST	1	
2	14151-94L00	GASKET, EXHAUST MANIFOLD	1	
3	01550-08407	BOLT	2	
4	09116-08152	BOLT (8X35)	2	
5	01550-08707	BOLT	6	
6	55321-87J01	ANODE, PROTECTION	1	
7	11261-93J00	COVER, PROTECTION ANODE	1	
8	09103-06281	BOLT (6X14)	1	
9	09280-22019	O RING (D:1.9,ID:21.8)	1	
10	01550-0820C	BOLT	1	

FIG.144A

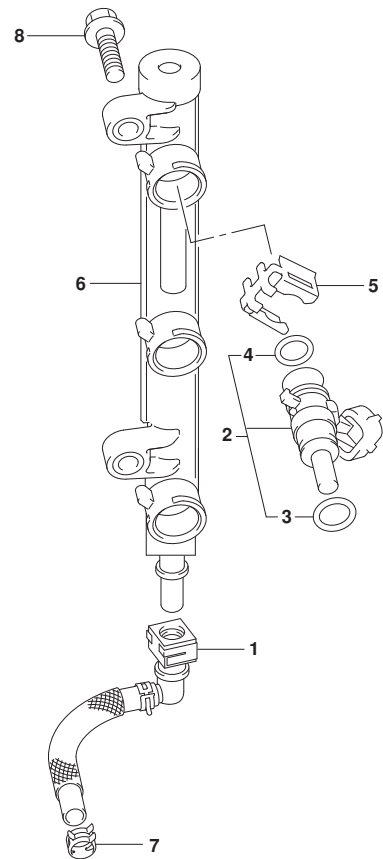


FIG.144A (1-C-2) FUEL INJECTOR

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	15681-94L00	HOSE, FUEL	1	PUMP TO DLVY
2	15710-82M00	INJECTOR ASSY, FUEL	3	
3	15716-82M00	.O RING	3	LOWER
4	15717-82M00	.O RING	3	UPPER
5	15715-82M00	CLIP, FUEL INJECTOR	3	
6	15750-94L00	PIPE, DELIVERY	1	
7	09401-11425	CLIP	1	
8	01550-0625C	BOLT	2	



FIG.146A

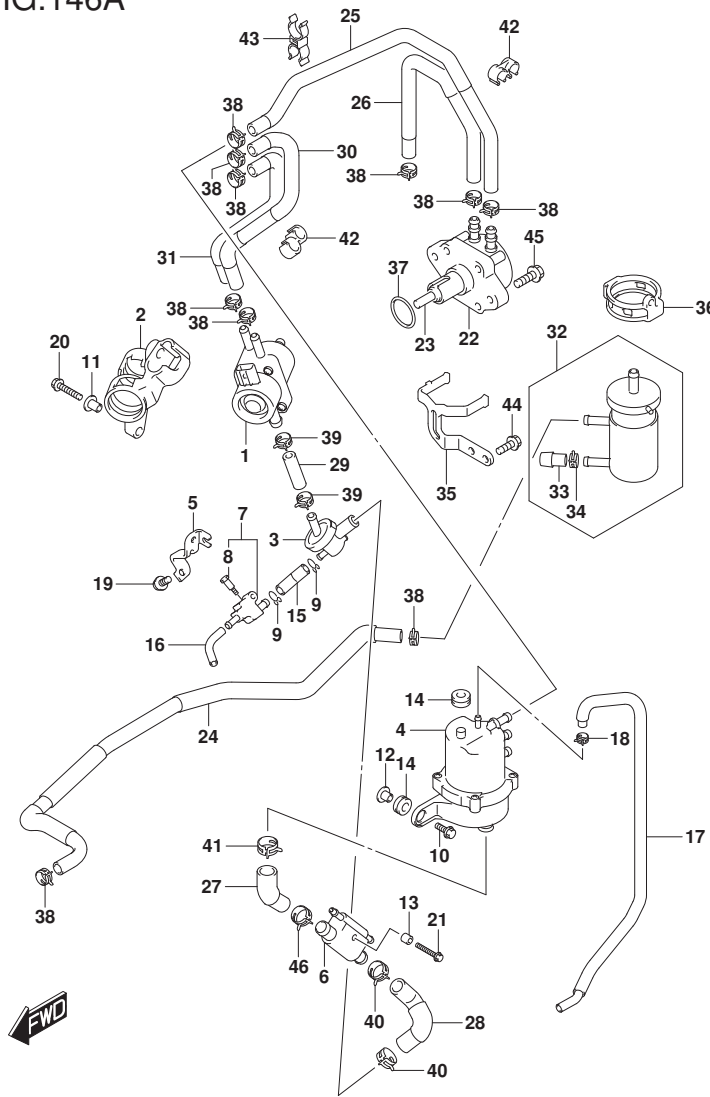


FIG.146A (1-C-3) FUEL PUMP ((020,021):P01)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	15200-94L11	PUMP ASSY, FUEL	1	
2	15217-94L01	CUSHION, FUEL PUMP	1	
3	15410-94L00	FILTER, FUEL	1	
4	15600-94L00	SEPARATOR ASSY, FUEL VAPOR	1	
5	15674-94L00	BRACKET, FUEL DRAIN	1	
6	15770-94L00	COOLER, FUEL	1	
7	15820-94L01	BODY, DRAIN	1	
8	15629-89L00	.SCREW, FUEL DRAIN	1	
9	59412-91J00	CLIP, FUEL HOSE	2	
10	09116-06517	BOLT (6X25)	2	
11	09169-06075	WASHER	1	
12	09169-06062	WASHER (6.3X17X1.6)	2	
13	09180-06230	SPACER (6.2X12.6X12.5)	1	
14	09320-09052	CUSHION	3	
15	09343-50L01-060	HOSE (5X10X60)	1	
16	09344-55001-070	HOSE (5.5X9X70)	1	
17	15662-94L20	HOSE, EVAPORATION	1	
18	09401-08412	CLIP	1	
19	01550-0616C	BOLT	1	
20	01550-0630C	BOLT	1	
21	01550-0645C	BOLT	1	
22	15100-94L01	PUMP ASSY, FUEL	1	
23	15131-94L00	ROD, FUEL PUMP	1	
24	15191-94L00	HOSE, FUEL	1	CONN TO FILTER
25	15192-94L00	HOSE, FUEL	1	PUMP TO SEPARATOR
26	15193-94L00	HOSE, FUEL	1	FILTER TO PUMP
27	15194-94L60	HOSE, FUEL	1	SEPARATOR TO COOLER
28	15194-94L70	HOSE, FUEL	1	COOLER TO 3WAY
29	15194-94L80	HOSE, FUEL	1	3WAY TO PUMP
30	15194-94L30	HOSE, FUEL	1	PUMP(H) TO SEP1
31	15194-94L40	HOSE, FUEL	1	PUMP(H) TO SEP2
32	15410-87L00	FILTER, FUEL	1	
33	15419-87J00	.CAP, FUEL FILTER	1	
34	09401-11423	.CLIP	1	
35	15421-94L00	BRACKET, FUEL FILTER	1	
36	15422-94L00	CLAMP, FUEL FILTER	1	

FIG.146A

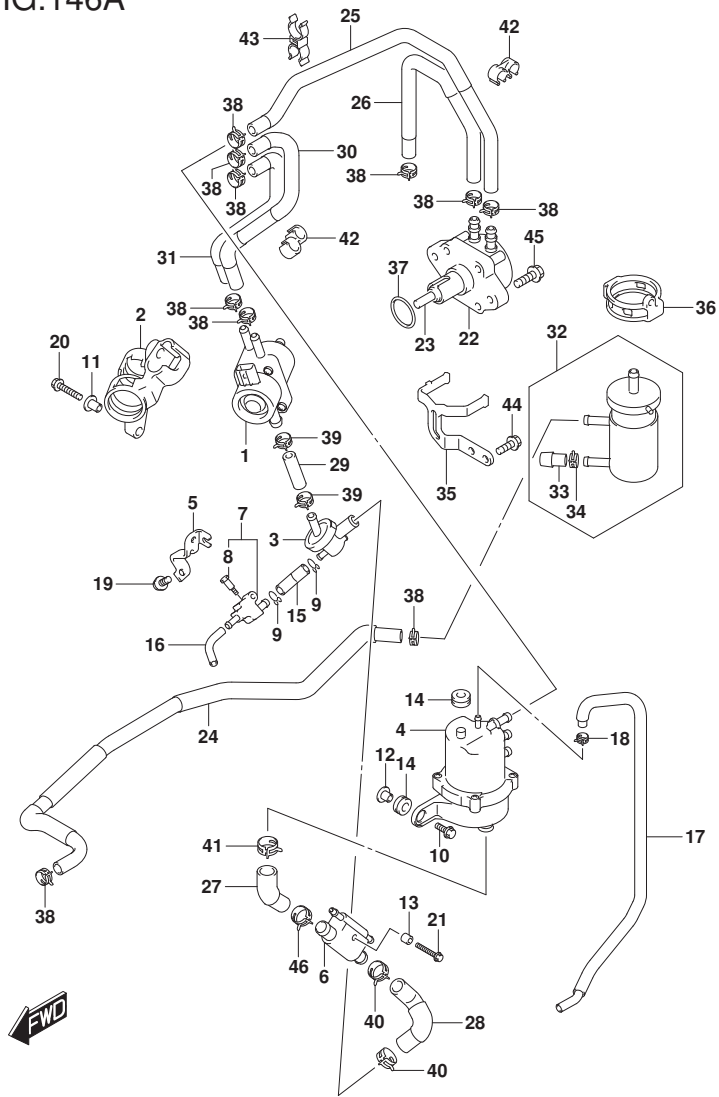


FIG.146A (1-C-4) FUEL PUMP ((020,021):P01)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
37	09280-26005	O RING (D:2.4,ID:26.2)	1	
38	09401-11423	CLIP	10	
39	09401-13423	CLIP	2	
40	09401-20409	CLIP	2	
41	09401-26408	CLIP	1	
42	09408-00043	CLAMP (ID:11.8X2)	2	
43	09408-00233	CLAMP	1	
44	01550-0616C	BOLT	2	
45	01550-0625C	BOLT	2	
46	09401-23413	CLIP	1	

- DF25A P01
- DF25AR P01
- DF25AT P01
- DF25ATH P01
- DF30AQ P01
- DF30AR P01
- DF30AT P01
- DF30ATH P01

FIG.146B

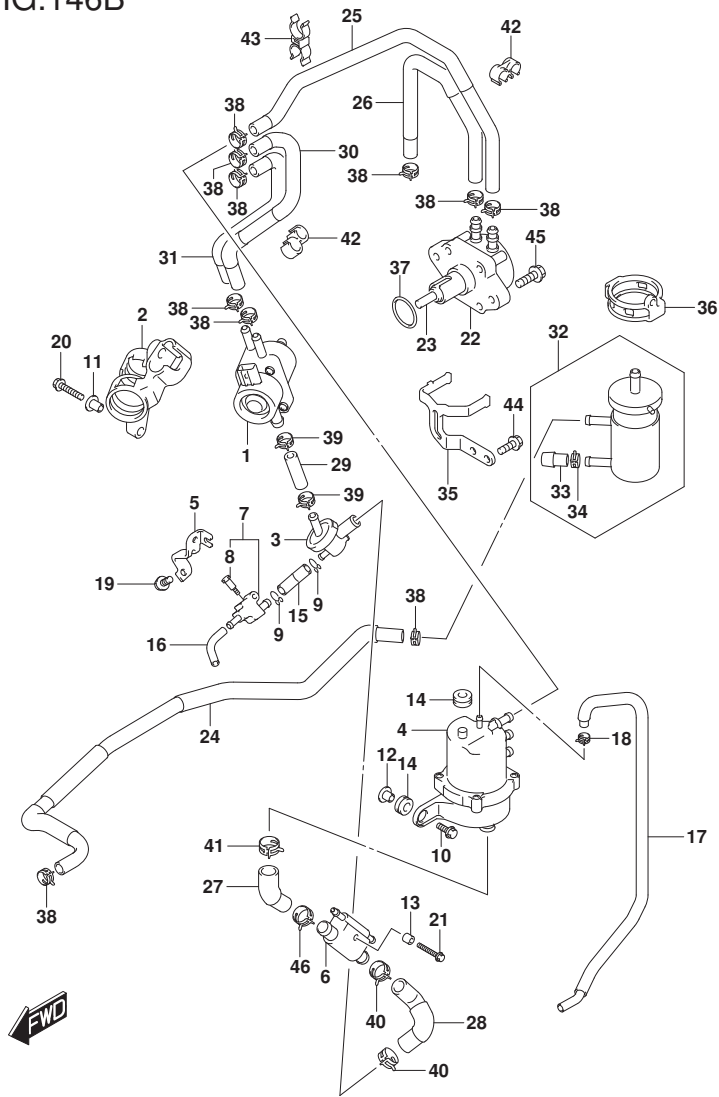


FIG.146B (1-C-5) FUEL PUMP ((020,021):P40)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	15200-94L11	PUMP ASSY, FUEL	1	
2	15217-94L01	CUSHION, FUEL PUMP	1	
3	15410-94L00	FILTER, FUEL	1	
4	15600-94L00	SEPARATOR ASSY, FUEL VAPOR	1	
5	15674-94L00	BRACKET, FUEL DRAIN	1	
6	15770-94L00	COOLER, FUEL	1	
7	15820-94L01	BODY, DRAIN	1	
8	15629-89L00	.SCREW, FUEL DRAIN	1	
9	59412-91J00	CLIP, FUEL HOSE	2	
10	09116-06517	BOLT (6X25)	2	
11	09169-06075	WASHER	1	
12	09169-06062	WASHER (6.3X17X1.6)	2	
13	09180-06230	SPACER (6.2X12.6X12.5)	1	
14	09320-09052	CUSHION	3	
15	09343-50L01-060	HOSE (5X10X60)	1	
16	09344-55001-070	HOSE (5.5X9X70)	1	
17	15662-94L20	HOSE, EVAPORATION	1	
18	09401-08412	CLIP	1	
19	01550-0616C	BOLT	1	
20	01550-0630C	BOLT	1	
21	01550-0645C	BOLT	1	
22	15100-94L10	PUMP ASSY, FUEL	1	
23	15131-94L00	ROD, FUEL PUMP	1	
24	15191-94L00	HOSE, FUEL	1	CONN TO FILTER
25	15192-94L00	HOSE, FUEL	1	PUMP TO SEPARATOR
26	15193-94L00	HOSE, FUEL	1	FILTER TO PUMP
27	15194-94L60	HOSE, FUEL	1	SEPARATOR TO COOLER
28	15194-94L70	HOSE, FUEL	1	COOLER TO 3WAY
29	15194-94L80	HOSE, FUEL	1	3WAY TO PUMP
30	15194-94L30	HOSE, FUEL	1	PUMP(H) TO SEP1
31	15194-94L40	HOSE, FUEL	1	PUMP(H) TO SEP2
32	15410-87L00	FILTER, FUEL	1	
33	15419-87J00	.CAP, FUEL FILTER	1	
34	09401-11423	.CLIP	1	
35	15421-94L00	BRACKET, FUEL FILTER	1	
36	15422-94L00	CLAMP, FUEL FILTER	1	

FIG.146B

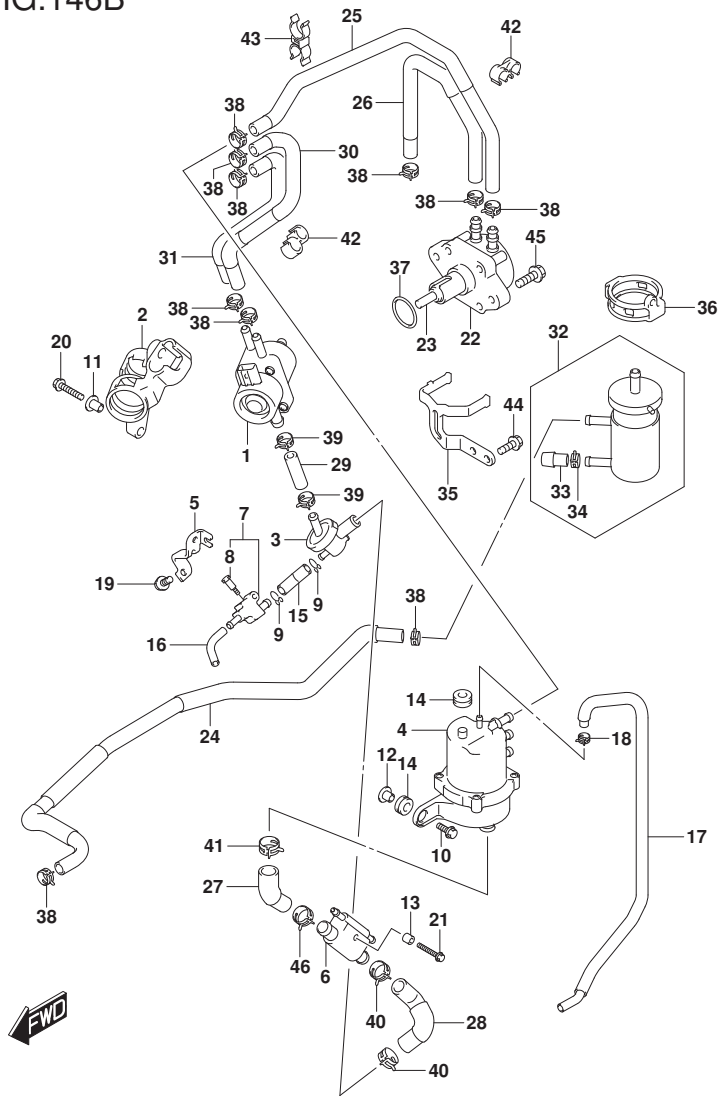


FIG.146B (1-C-6) FUEL PUMP ((020,021):P40)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
37	09280-26005	O RING (D:2.4,ID:26.2)	1	
38	09401-11423	CLIP	10	
39	09401-13423	CLIP	2	
40	09401-20409	CLIP	2	
41	09401-26408	CLIP	1	
42	09408-00043	CLAMP (ID:11.8X2)	2	
43	09408-00233	CLAMP	1	
44	01550-0616C	BOLT	2	
45	01550-0625C	BOLT	2	
46	09401-23413	CLIP	1	

DF30A P40

FIG.146C

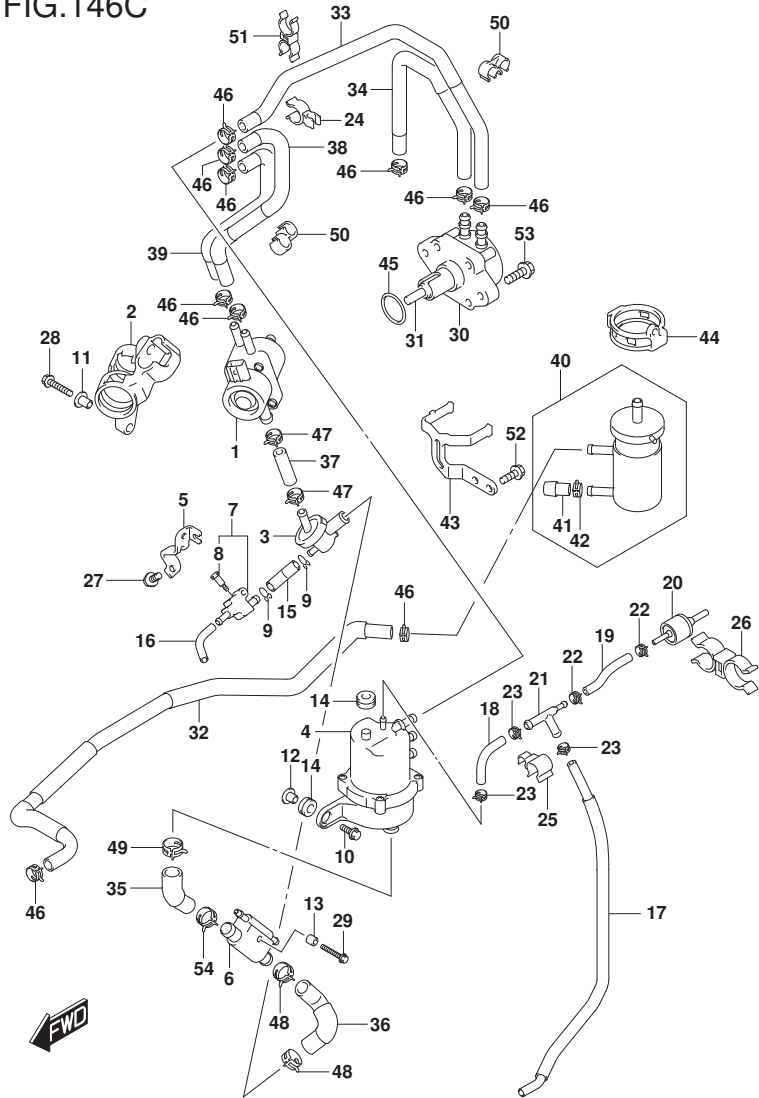


FIG.146C (1-C-7) FUEL PUMP (022:P01)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	15200-94L11	PUMP ASSY, FUEL	1	
2	15217-94L01	CUSHION, FUEL PUMP	1	
3	15410-94L00	FILTER, FUEL	1	
4	15600-94L00	SEPARATOR ASSY, FUEL VAPOR	1	
5	15674-94L00	BRACKET, FUEL DRAIN	1	
6	15770-94L00	COOLER, FUEL	1	
7	15820-94L01	BODY, DRAIN	1	
8	15629-89L00	.SCREW, FUEL DRAIN	1	
9	59412-91J00	CLIP, FUEL HOSE	2	
10	09116-06517	BOLT (6X25)	2	
11	09169-06075	WASHER	1	
12	09169-06062	WASHER (6.3X17X1.6)	2	
13	09180-06230	SPACER (6.2X12.6X12.5)	1	
14	09320-09052	CUSHION	3	
15	09343-50L01-060	HOSE (5X10X60)	1	
16	09344-55001-070	HOSE (5.5X9X70)	1	
17	15660-94L00	HOSE, EVAPORATION NO.1	1	
18	15662-94L30	HOSE, EVAPORATION NO.3	1	
19	15662-94L40	HOSE, EVAPORATION NO.2	1	
20	95569-78040	VALVE, CHECK	1	
21	09367-06006	3 WAY	1	
22	09401-06406	CLIP	2	
23	09401-08412	CLIP	3	
24	09408-00060	CLAMP	1	
25	09408-00198	CLAMP	1	
26	09408-00262	CLAMP	1	
27	01550-0616C	BOLT	1	
28	01550-0630C	BOLT	1	
29	01550-0645C	BOLT	1	
30	15100-94L01	PUMP ASSY, FUEL	1	
31	15131-94L00	ROD, FUEL PUMP	1	
32	15191-94L00	HOSE, FUEL	1	CONN TO FILTER
33	15192-94L00	HOSE, FUEL	1	PUMP TO SEPARATOR
34	15193-94L00	HOSE, FUEL	1	FILTER TO PUMP
35	15194-94L60	HOSE, FUEL	1	SEPARATOR TO COOLER
36	15194-94L70	HOSE, FUEL	1	COOLER TO 3WAY

FIG.146C

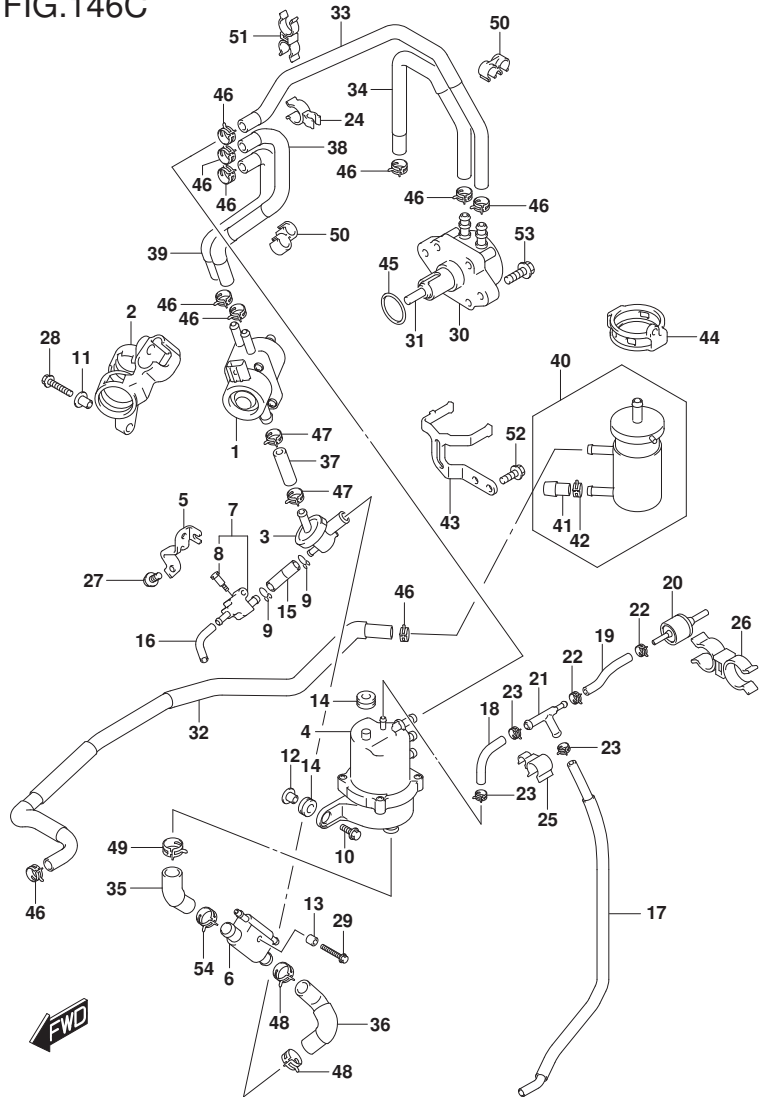


FIG.146C (1-C-8) FUEL PUMP (022:P01)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
37	15194-94L80	HOSE, FUEL	1	3WAY TO PUMP
38	15194-94L30	HOSE, FUEL	1	PUMP(H) TO SEP1
39	15194-94L40	HOSE, FUEL	1	PUMP(H) TO SEP2
40	15410-87L00	FILTER, FUEL	1	
41	15419-87J00	.CAP, FUEL FILTER	1	
42	09401-11423	.CLIP	1	
43	15421-94L00	BRACKET, FUEL FILTER	1	
44	15422-94L00	CLAMP, FUEL FILTER	1	
45	09280-26005	O RING (D:2.4,ID:26.2)	1	
46	09401-11423	CLIP	10	
47	09401-13423	CLIP	2	
48	09401-20409	CLIP	2	
49	09401-26408	CLIP	1	
50	09408-00043	CLAMP (ID:11.8X2)	2	
51	09408-00233	CLAMP	1	
52	01550-0616C	BOLT	2	
53	01550-0625C	BOLT	2	
54	09401-23413	CLIP	1	

DF25A P01
DF25AT P01
DF25ATH P01
DF30AQ P01
DF30AR P01
DF30AT P01
DF30ATH P01

FIG.146D

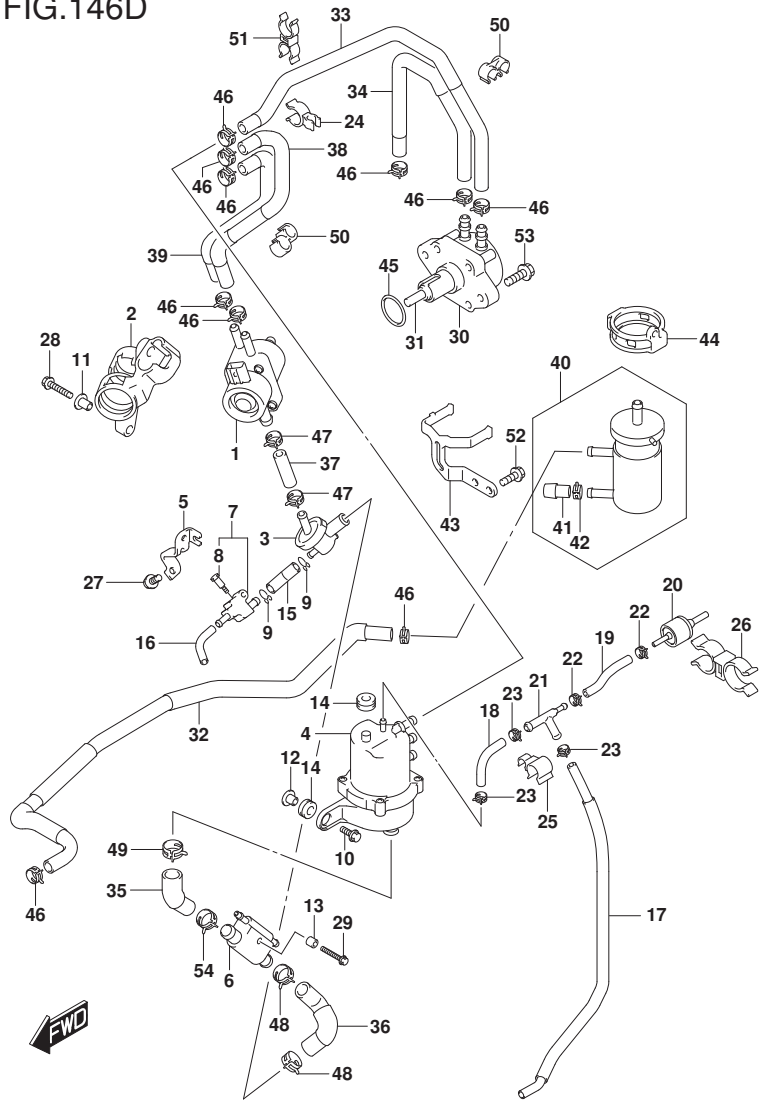


FIG.146D (1-C-9) FUEL PUMP (022:P40)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	15200-94L11	PUMP ASSY, FUEL	1	
2	15217-94L01	CUSHION, FUEL PUMP	1	
3	15410-94L00	FILTER, FUEL	1	
4	15600-94L00	SEPARATOR ASSY, FUEL VAPOR	1	
5	15674-94L00	BRACKET, FUEL DRAIN	1	
6	15770-94L00	COOLER, FUEL	1	
7	15820-94L01	BODY, DRAIN	1	
8	15629-89L00	.SCREW, FUEL DRAIN	1	
9	59412-91J00	CLIP, FUEL HOSE	2	
10	09116-06517	BOLT (6X25)	2	
11	09169-06075	WASHER	1	
12	09169-06062	WASHER (6.3X17X1.6)	2	
13	09180-06230	SPACER (6.2X12.6X12.5)	1	
14	09320-09052	CUSHION	3	
15	09343-50L01-060	HOSE (5X10X60)	1	
16	09344-55001-070	HOSE (5.5X9X70)	1	
17	15660-94L00	HOSE, EVAPORATION NO.1	1	
18	15662-94L30	HOSE, EVAPORATION NO.3	1	
19	15662-94L40	HOSE, EVAPORATION NO.2	1	
20	95569-78040	VALVE, CHECK	1	
21	09367-06006	3 WAY	1	
22	09401-06406	CLIP	2	
23	09401-08412	CLIP	3	
24	09408-00060	CLAMP	1	
25	09408-00198	CLAMP	1	
26	09408-00262	CLAMP	1	
27	01550-0616C	BOLT	1	
28	01550-0630C	BOLT	1	
29	01550-0645C	BOLT	1	
30	15100-94L10	PUMP ASSY, FUEL	1	
31	15131-94L00	ROD, FUEL PUMP	1	
32	15191-94L00	HOSE, FUEL	1	CONN TO FILTER
33	15192-94L00	HOSE, FUEL	1	PUMP TO SEPARATOR
34	15193-94L00	HOSE, FUEL	1	FILTER TO PUMP
35	15194-94L60	HOSE, FUEL	1	SEPARATOR TO COOLER
36	15194-94L70	HOSE, FUEL	1	COOLER TO 3WAY

FIG.146D

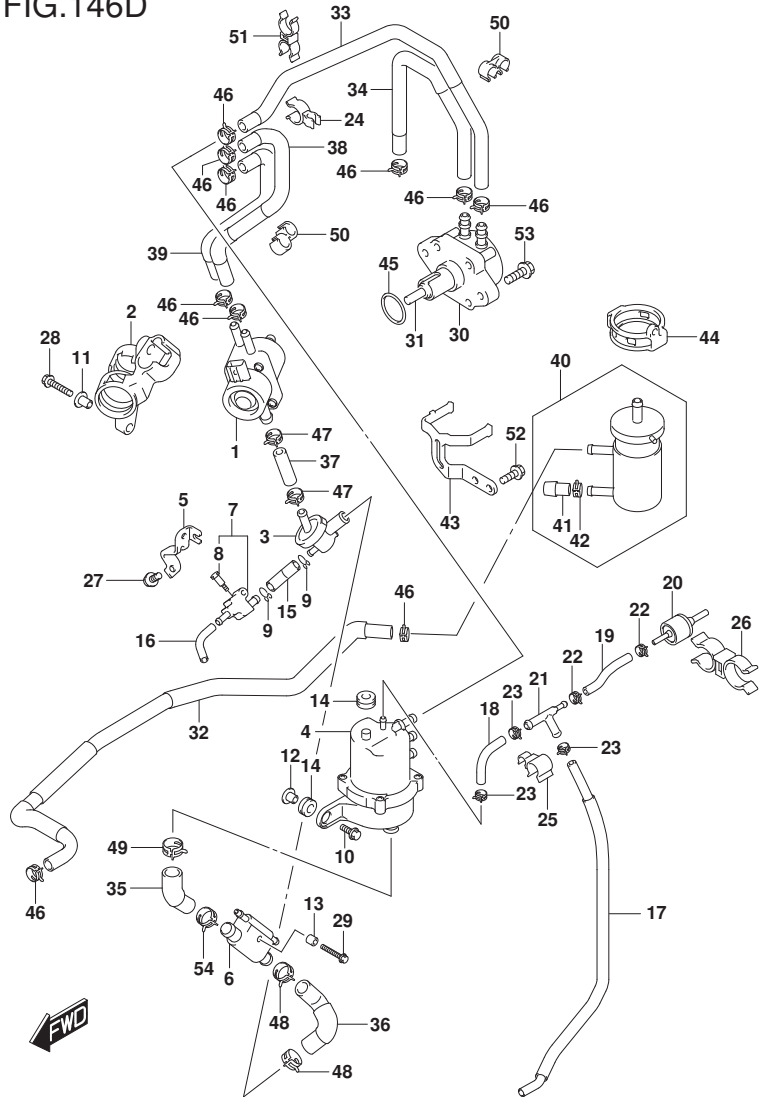


FIG.146D (1-C-10) FUEL PUMP (022:P40)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
37	15194-94L80	HOSE, FUEL	1	3WAY TO PUMP
38	15194-94L30	HOSE, FUEL	1	PUMP(H) TO SEP1
39	15194-94L40	HOSE, FUEL	1	PUMP(H) TO SEP2
40	15410-87L00	FILTER, FUEL	1	
41	15419-87J00	.CAP, FUEL FILTER	1	
42	09401-11423	.CLIP	1	
43	15421-94L00	BRACKET, FUEL FILTER	1	
44	15422-94L00	CLAMP, FUEL FILTER	1	
45	09280-26005	O RING (D:2.4,ID:26.2)	1	
46	09401-11423	CLIP	10	
47	09401-13423	CLIP	2	
48	09401-20409	CLIP	2	
49	09401-26408	CLIP	1	
50	09408-00043	CLAMP (ID:11.8X2)	2	
51	09408-00233	CLAMP	1	
52	01550-0616C	BOLT	2	
53	01550-0625C	BOLT	2	
54	09401-23413	CLIP	1	

DF30A P40

FIG.160A

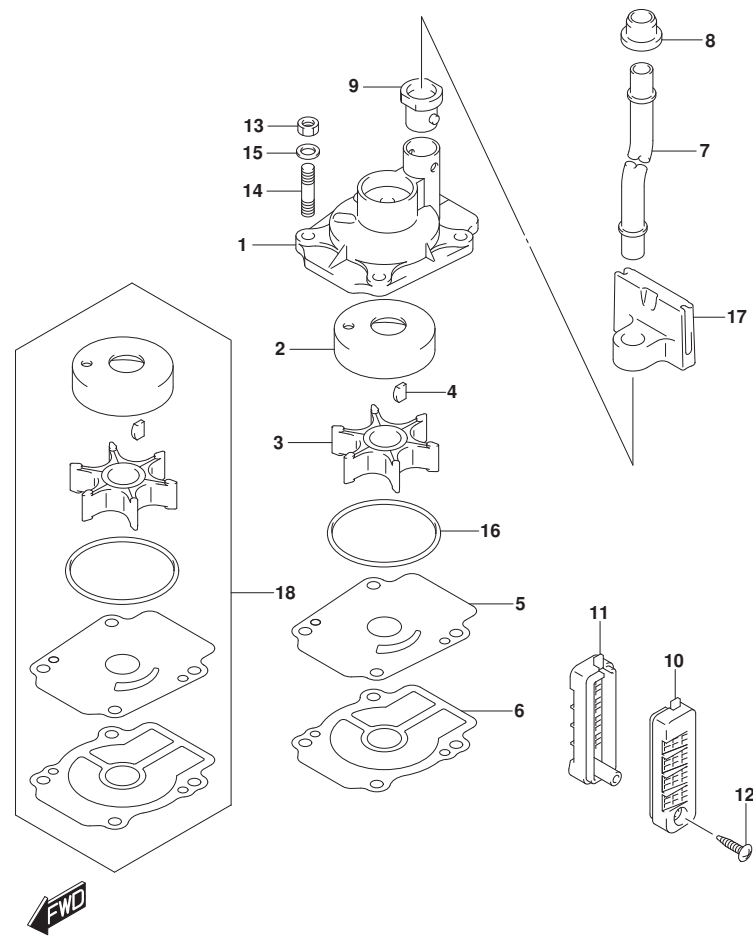



FIG.160A (1-C-11) WATER PUMP (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	17411-94L00	CASE, WATER PUMP	1	
2	17413-94L00	SLEEVE, WATER PUMP CASE	1	
3	17461-94L00	IMPELLER, WATER PUMP	1	
4	17462-94L10	KEY, WATER PUMP IMPELLER	1	
5	17471-94L20	PANEL, PUMP CASE UNDER	1	
6	17472-94L00	GASKET, PUMP CASE UNDER	1	
7-1	17561-94L00	TUBE, WATER	1	W/TRANSOM(S)
7-2	17561-94L10	TUBE, WATER	1	W/TRANSOM(L)
8	17562-94L00	GROMMET, WATER TUBE UPPER	1	UPPER
9	17564-94L00	GROMMET, WATER TUBE LOWER	1	LOWER
10	17631-94L00	FILTER, WATER PORT SIDE	1	PORT
11	17632-94L00	FILTER, WATER STBD SIDE	1	STBD
12	03142-04259	SCREW	1	
13	29141-93J00	NUT (M6)	4	
14	09108-06149	STUD BOLT	4	
15	09160-06082	WASHER (6.5X13X1.0)	4	
16	09280-54004	O RING (D:2.8,ID:53.4)	1	
17	17565-94L00	GUIDE, WATER TUBE	1	
18	17400-94L21	KIT, WATER PUMP REPAIR	1	OPT

NOTE : DF25A,DF25AR,DF25AT,DF25ATH,DF30AR,DF30AT,DF30ATH

- DF25A P01
- DF25AR P01
- DF25AT P01
- DF25ATH P01
- DF30AR P01
- DF30AT P01
- DF30ATH P01

FIG.160B (1-C-12) WATER PUMP (DF30A)

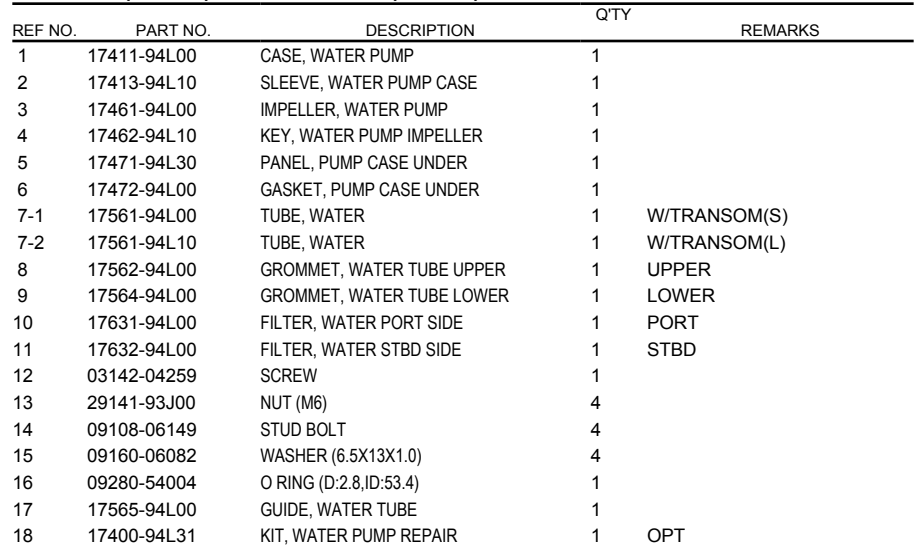

DF25A_30A_P01_022

FIG.160C

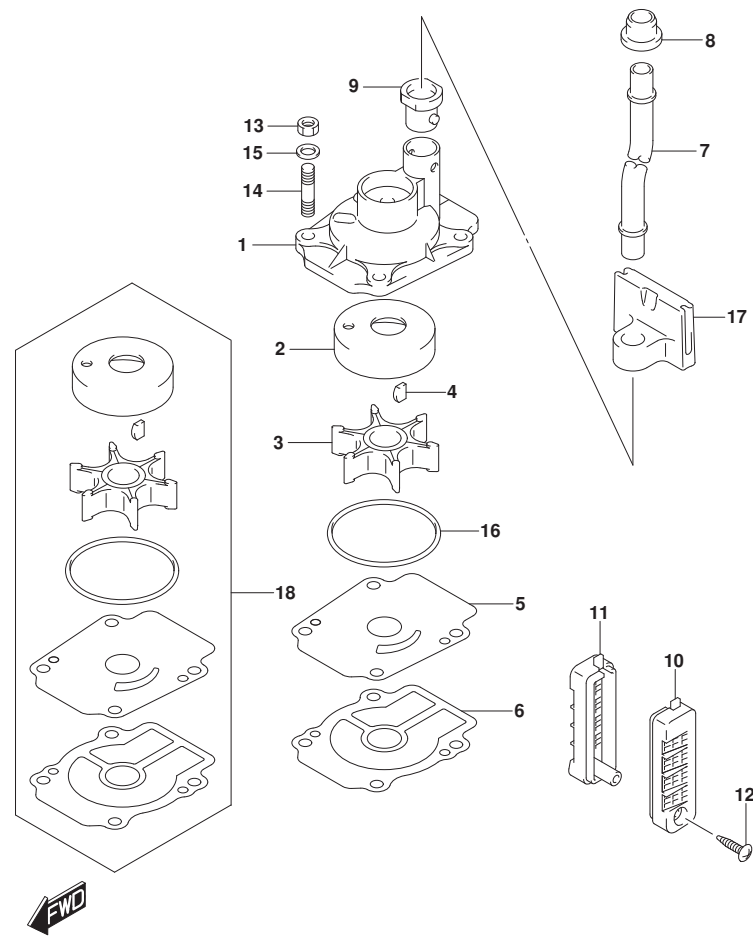


FIG.160C (1-C-13) WATER PUMP (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	17411-94L00	CASE, WATER PUMP	1	
2	17413-94L00	SLEEVE, WATER PUMP CASE	1	
3	17461-94L00	IMPELLER, WATER PUMP	1	
4	17462-94L10	KEY, WATER PUMP IMPELLER	1	
5	17471-94L20	PANEL, PUMP CASE UNDER	1	
6	17472-94L00	GASKET, PUMP CASE UNDER	1	
7-1	17561-94L00	TUBE, WATER	1	W/TRANSOM(S)
7-2	17561-94L10	TUBE, WATER	1	W/TRANSOM(L)
7-3	17561-94L20	TUBE, WATER	1	W/TRANSOM(X):(020,021)
8	17562-94L00	GROMMET, WATER TUBE UPPER	1	UPPER
9	17564-94L00	GROMMET, WATER TUBE LOWER	1	LOWER
10	17631-94L00	FILTER, WATER PORT SIDE	1	PORT
11	17632-94L00	FILTER, WATER STBD SIDE	1	STBD
12	03142-04259	SCREW	1	
13	29141-93J00	NUT (M6)	4	
14	09108-06149	STUD BOLT	4	
15	09160-06082	WASHER (6.5X13X1.0)	4	
16	09280-54004	O RING (D:2.8,ID:53.4)	1	
17	17565-94L00	GUIDE, WATER TUBE	1	
18	17400-94L21	KIT, WATER PUMP REPAIR	1	OPT

DF30AQ P01

FIG.162A

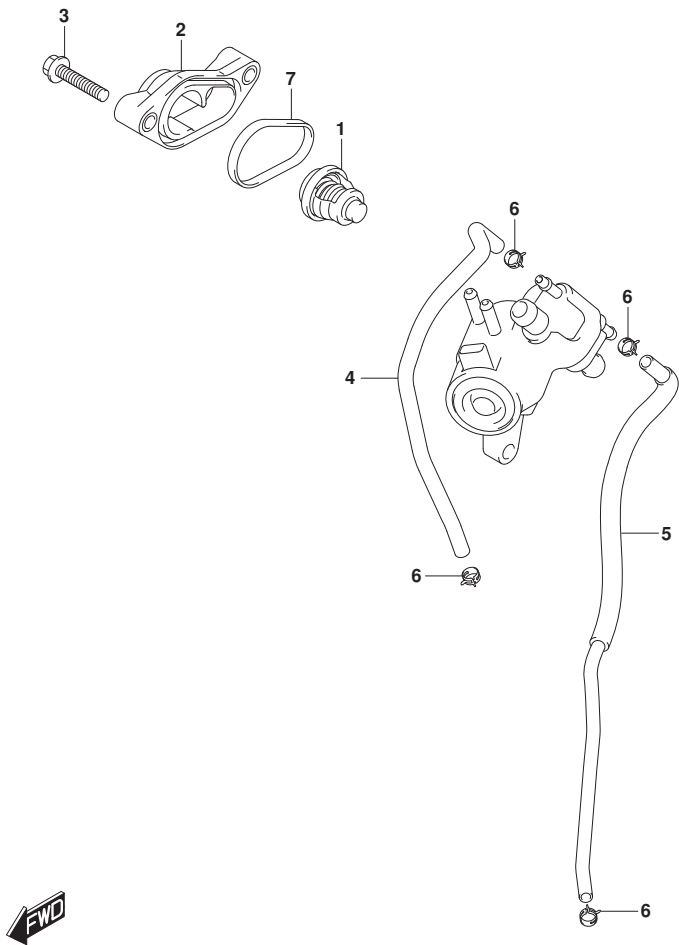


FIG.162A (1-C-14) THERMOSTAT

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	17670-94J02	THERMOSTAT, WATER (60C)	1	
2	17680-94L00	COVER, THERMOSTAT	1	
3	01550-0630C	BOLT	2	
4	17712-94L00	HOSE, WATER	1	COOLER TO IND
5	17712-94L11	HOSE, WATER	1	HOUSING TO COOLER
6	09401-08413	CLIP	4	
7	17685-94L01	SEAL, THERMOSTAT COVER	1	



FIG.163A

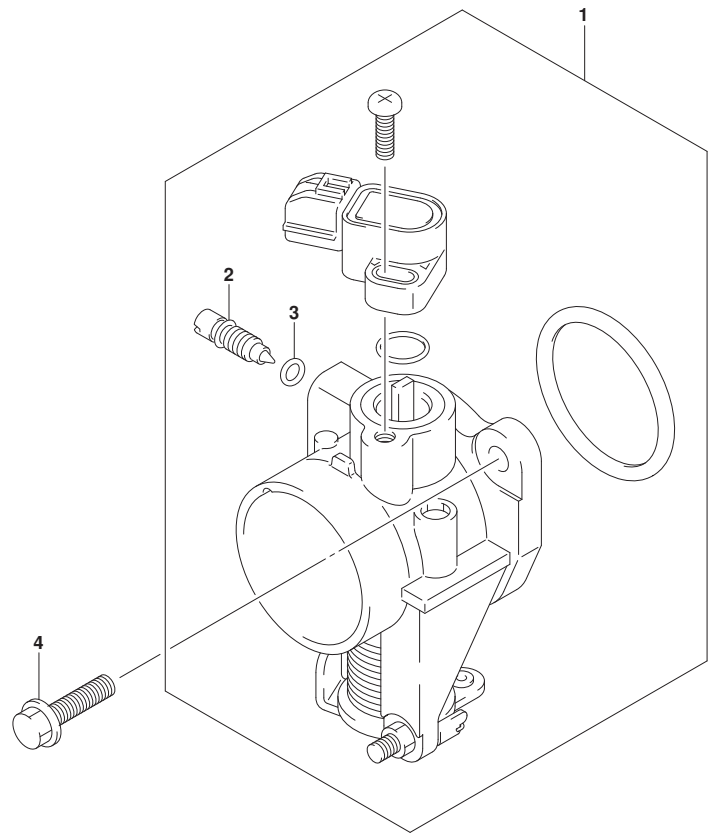


FIG.163A (1-D-2) THROTTLE BODY

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13300-94L00	BODY ASSY, THROTTLE	1	
2	13662-22J00	.ADJUSTER, BAS	1	
3	13453-36F00	.O RING	1	
4	01550-0620C	BOLT	2	

FIG.166A

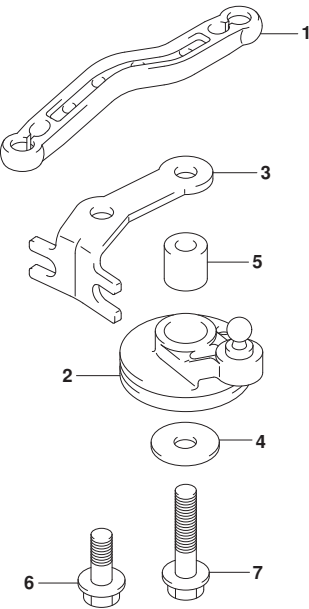


FIG.166A (1-D-3) THROTTLE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	19137-94L00	ROD, THROTTLE NO.2	1	
2	19140-94L11	DRUM, THROTTLE CONTROL	1	
3	19184-94L00	HOLDER, THROTTLE CABLE	1	
4	09160-06046	WASHER (6.5X20X1.5)	1	
5	09180-06230	SPACER (6.2X12.6X12.5)	1	
6	01550-0616C	BOLT	1	
7	01550-0630C	BOLT	1	

NOTE : DF25A,DF25ATH,DF30A,DF30ATH,DF30AQ

DF25A P01
DF25ATH P01
DF30A P40
DF30AQ P01
DF30ATH P01



FIG.166B

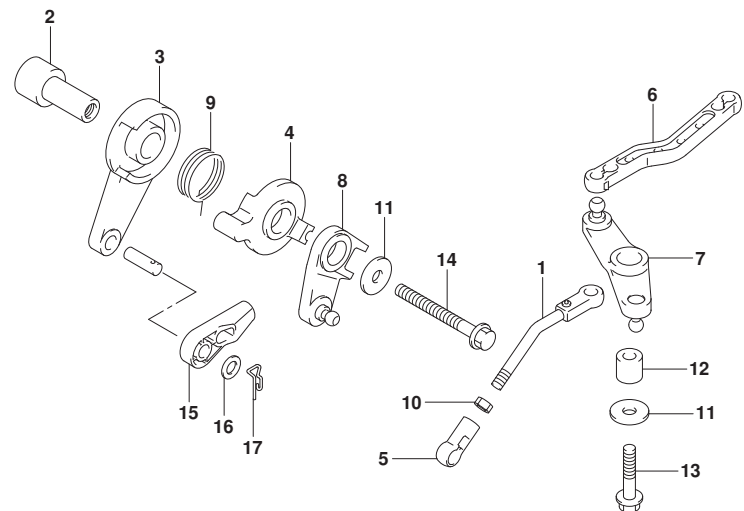


FIG.166B (1-D-4) THROTTLE CONTROL (DF25AR,DF25AT,DF30AR,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13510-94L00	ROD, THROTTLE NO.1	1	
2	19116-94L00	BRACKET, THROTTLE LEVER	1	
3	19120-99J11	LEVER, THROTTLE CONTROL	1	
4	19122-99J00	LEVER, INTERLINK THROTTLE NO.2	1	
5	19131-95502	CONNECTOR	1	
6	19137-94L00	ROD, THROTTLE NO.2	1	
7	19140-94L01	LEVER, THROTTLE NO.2	1	
8	19140-94L20	LEVER, THR CONTROL NO.2	1	
9	19185-99J00	SPRING, THROTTLE LEVER	1	
10	09140-05005	NUT (M5)	1	
11	09160-06046	WASHER (6.5X20X1.5)	2	
12	09180-06230	SPACER (6.2X12.6X12.5)	1	
13	01550-0625C	BOLT	1	
14	01550-06557	BOLT	1	
15	67467-89J01	CONNECTOR	1	
16	09160-06055	WASHER (7X12X1.0)	1	
17	09385-06016	CLIP	1	

DF25AR P01
DF25AT P01
DF30AR P01
DF30AT P01

FIG.167A

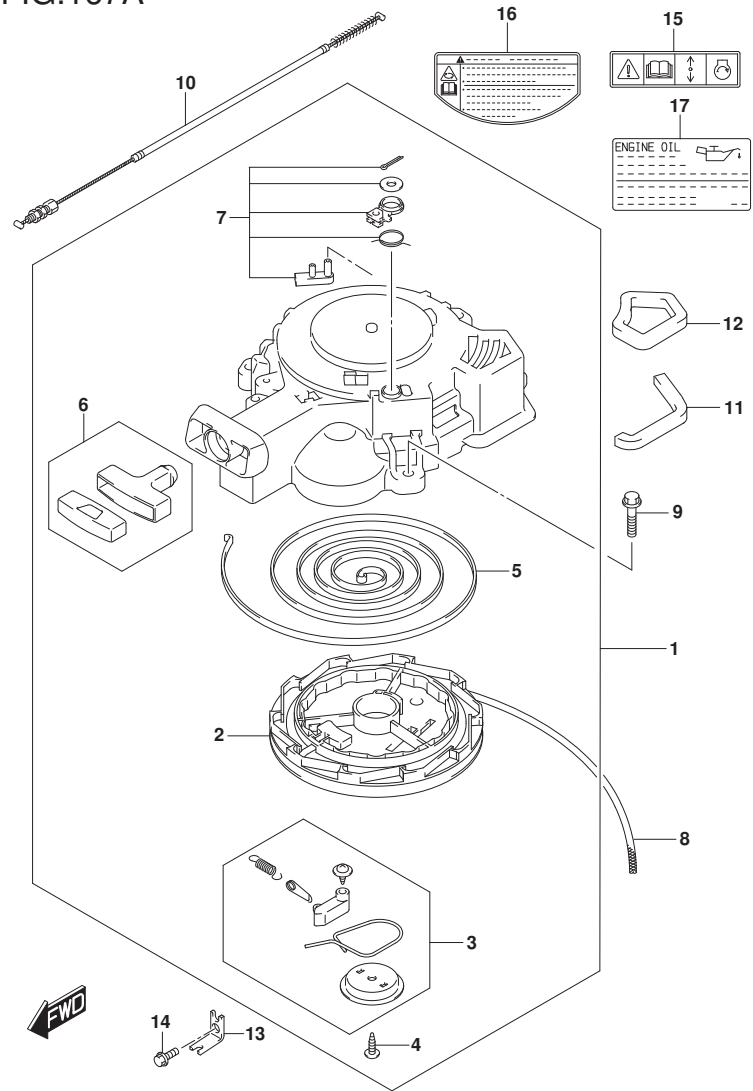


FIG.167A (1-D-5) RECOIL STARTER

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	18100-94L00	STARTER ASSY, RECOIL	1	
2	18121-94JL0	.REEL	1	
3	18130-93E01	.RATCHET SET	1	
4	18132-89L00	.SCREW	1	
5	18142-93E00	.SPRING, SPIRAL	1	
6	18210-95L00	.GRIP ASSY	1	
7	18280-93E00	.NSI SET	1	
8	99000-81158-50M	STARTER ROPE (L:50000)	1	OPT,L:50000->1500
9	01550-0630C	BOLT	3	
10	18290-94L00	CABLE ASSY, NSI	1	
11	18193-94L00	OIL SEAL, AIR REC LOWER	1	LOWER
12	18194-94L00	OIL SEAL, AIR REC UPPER	1	UPPER
13	18295-94L00	BRACKET, NSI CABLE	1	
14	01550-0616C	BOLT	1	
15-1	69711-93E11	LABEL, S.I.G.P	1	020
15-2	69711-91J01	LABEL, S.I.G.P	1	021,022
16	61472-97J00	LABEL, RECOIL STARTER	1	
17	61494-94L01	LABEL, OIL & CLEARANCE	1	

FIG.175A (1-D-6) OIL PUMP

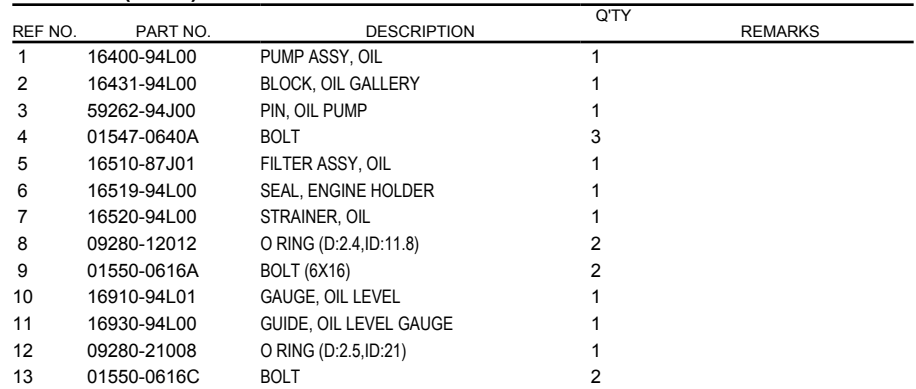


FIG.206A

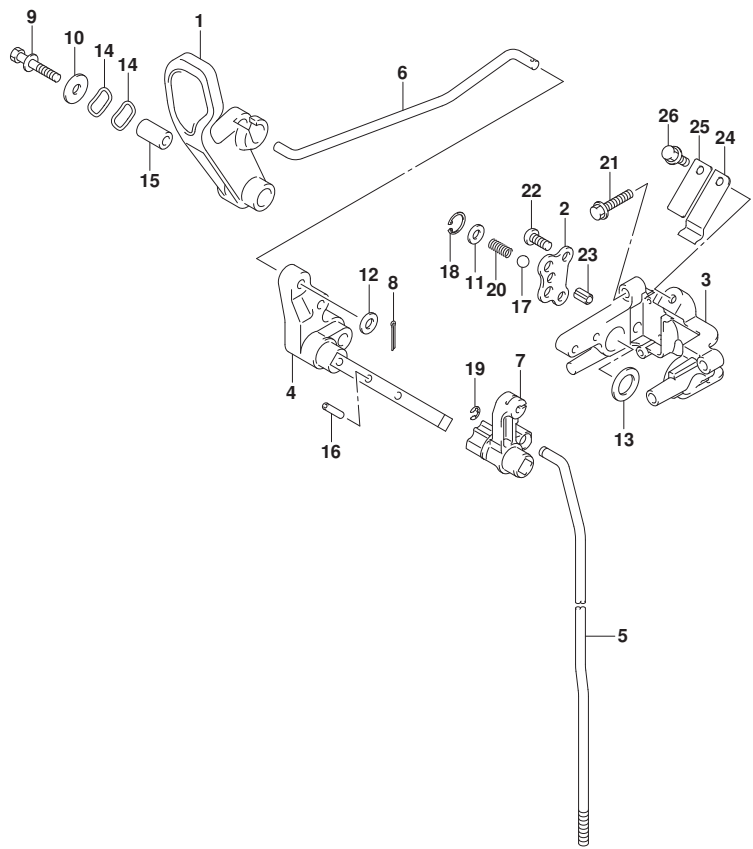


FIG.206A (1-D-7) CLUTCH ROD (DF25A,DF25ATH,DF30A,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	21111-89L01	LEVER, CLUTCH	1	
2	21122-94L00	PLATE, CLUTCH NOTCH	1	
3	21151-94L10	HOLDER, CLUTCH SHAFT	1	
4	21210-94L00	SHAFT, CLUTCH LEVER	1	
5-1	23111-94L00	ROD, CLUTCH	1	W/TRANSOM(S)
5-2	23111-94L10	ROD, CLUTCH	1	W/TRANSOM(L)
6	23115-94L00	LINK, CLUTCH LEVER	1	
7	23211-94L10	ARM, CLUTCH ROD	1	
8	09204-01002	PIN	1	
9	09116-06234	BOLT (6X35)	1	
10	09160-06046	WASHER (6.5X20X1.5)	1	
11-1	09160-06082	WASHER (6.5X13X1.0)	1	020,021
11-2	09160-06176	WASHER	1	022
12	09160-06094	WASHER (6.5X15X1.0)	1	
13	09160-14071	WASHER (13.3X23X1)	1	
14	09164-14008	WASHER	2	
15	09180-06186	SPACER (6.2X12.6X21)	1	
16	09205-04002	PIN (4X20)	1	
17	09260-10006	BALL	1	
18	09381-14004	CIRCLIP	1	
19	09383-04002	E RING	1	
20	09440-07080	SPRING	1	
21	01550-0625C	BOLT	2	
22	02112-06127	SCREW	2	
23	37724-99J00	ROD, SWITCH PUSH	1	
24	23213-94400	SPRING, CLUTCH NOTCH	1	
25	23214-89J00	SPRING, NOTCH PLATE	1	
26	09116-06225	BOLT (6X16)	1	

DF25A P01
DF25ATH P01
DF30A P40
DF30ATH P01



FIG.206B

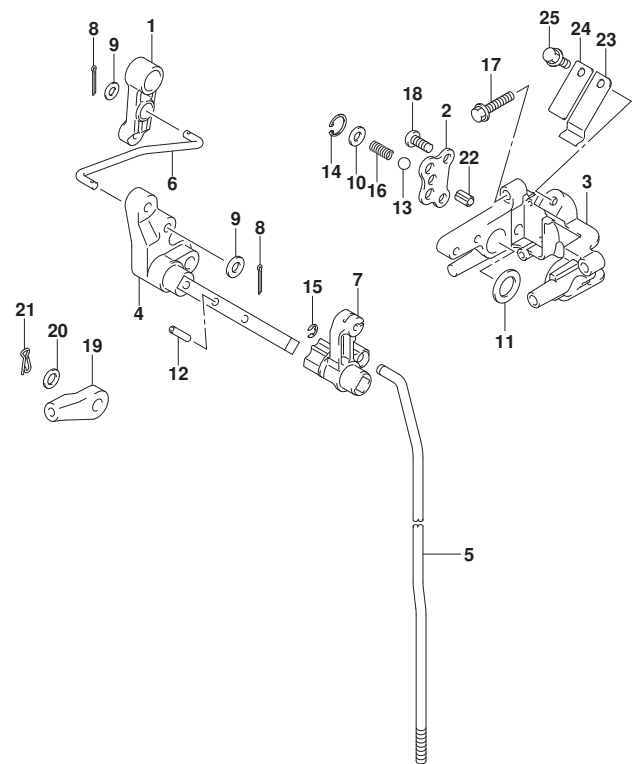


FIG.206B (1-D-8) CLUTCH ROD (DF25AR,DF25AT,DF30AR,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	21110-94L00	LEVER, CLUTCH CONTROL	1	
2	21122-94L00	PLATE, CLUTCH NOTCH	1	
3	21151-94L10	HOLDER, CLUTCH SHAFT	1	
4	21210-94L00	SHAFT, CLUTCH LEVER	1	
5-1	23111-94L00	ROD, CLUTCH	1	W/TRANSOM(S)
5-2	23111-94L10	ROD, CLUTCH	1	W/TRANSOM(L)
6	23115-94L10	LINK, CLUTCH LEVER	1	
7	23211-94L10	ARM, CLUTCH ROD	1	
8	09204-01002	PIN	2	
9	09160-05029	WASHER (5.5X12X0.8)	2	
10-1	09160-06082	WASHER (6.5X13X1.0)	1	020,021
10-2	09160-06176	WASHER	1	022
11	09160-14071	WASHER (13.3X23X1)	1	
12	09205-04002	PIN (4X20)	1	
13	09260-10006	BALL	1	
14	09381-14004	CIRCLIP	1	
15	09383-04002	E RING	1	
16	09440-07080	SPRING	1	
17	01550-0625C	BOLT	2	
18	02112-06127	SCREW	2	
19	67467-89J01	CONNECTOR	1	
20	09160-06055	WASHER (7X12X1.0)	1	
21	09385-06016	CLIP	1	
22	37724-99J00	ROD, SWITCH PUSH	1	
23	23213-94400	SPRING, CLUTCH NOTCH	1	
24	23214-89J00	SPRING, NOTCH PLATE	1	
25	09116-06225	BOLT (6X16)	1	

DF25AR P01
DF25AT P01
DF30AR P01
DF30AT P01



FIG.206C

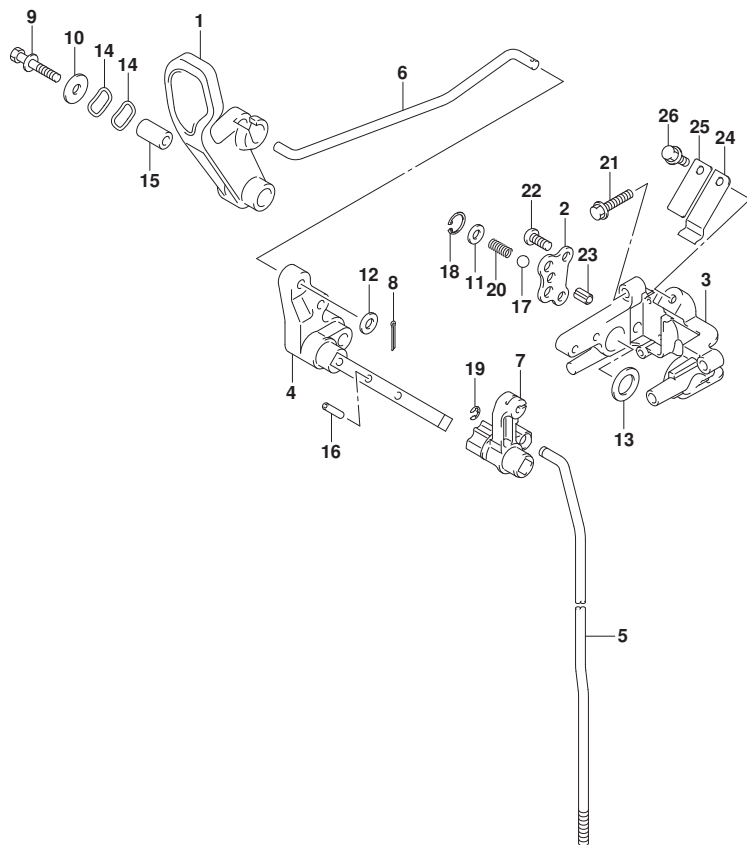


FIG.206C (1-D-9) CLUTCH ROD (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	21111-89L01	LEVER, CLUTCH	1	
2	21122-94L00	PLATE, CLUTCH NOTCH	1	
3	21151-94L10	HOLDER, CLUTCH SHAFT	1	
4	21210-94L00	SHAFT, CLUTCH LEVER	1	
5-1	23111-94L00	ROD, CLUTCH	1	W/TRANSOM(S)
5-2	23111-94L10	ROD, CLUTCH	1	W/TRANSOM(L),W/TRANSOM(X)
6	23115-94L00	LINK, CLUTCH LEVER	1	
7	23211-94L10	ARM, CLUTCH ROD	1	
8	09204-01002	PIN	1	
9	09116-06234	BOLT (6X35)	1	
10	09160-06046	WASHER (6.5X20X1.5)	1	
11-1	09160-06082	WASHER (6.5X13X1.0)	1	020,021
11-2	09160-06176	WASHER	1	022
12	09160-06094	WASHER (6.5X15X1.0)	1	
13	09160-14071	WASHER (13.3X23X1)	1	
14	09164-14008	WASHER	2	
15	09180-06186	SPACER (6.2X12.6X21)	1	
16	09205-04002	PIN (4X20)	1	
17	09260-10006	BALL	1	
18	09381-14004	CIRCLIP	1	
19	09383-04002	E RING	1	
20	09440-07080	SPRING	1	
21	01550-0625C	BOLT	2	
22	02112-06127	SCREW	2	
23	37724-99J00	ROD, SWITCH PUSH	1	
24	23213-94400	SPRING, CLUTCH NOTCH	1	
25	23214-89J00	SPRING, NOTCH PLATE	1	
26	09116-06225	BOLT (6X16)	1	

DF30AQ P01



FIG.210A (1-D-10) SHIFT ROD (DF25A,DF25AR,DF25AT,DF25ATH)



DF25A P01
DF25AR P01
DF25AT P01
DF25ATH P01

FIG.210B

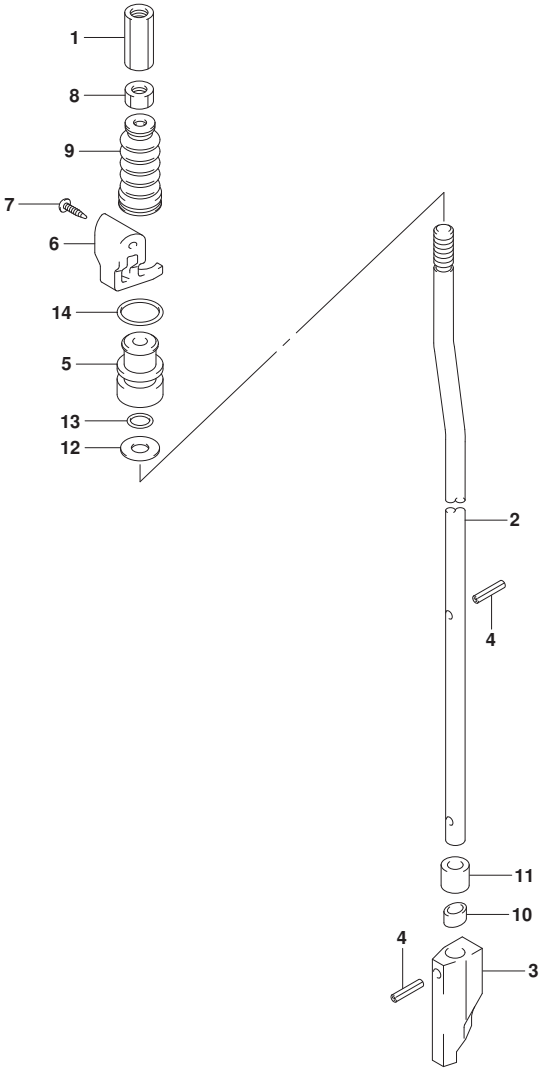


FIG.210B (1-D-11) SHIFT ROD (DF30A,DF30AR,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	23311-95J00	CONNECTOR, CLUTCH ROD	1	
2	25111-94L00	ROD, SHIFT	1	W/TRANSOM(S),W/TRANSOM(L)
3	25311-94L00	CAM, SHIFT	1	
4	09205-02004	SPRING PIN (2.5X12)	2	
5	25211-94L00	GUIDE, SHIFT ROD	1	
6	25215-94L00	STOPPER, SHIFT ROD GUIDE	1	
7	03142-0416C	SCREW	2	
8	29141-93J00	NUT (M6)	1	
9	25222-94L00	BOOT, SHIFT ROD	1	
10	25231-96301	HOLDER, MAGNETO	1	
11	25232-96302	MAGNETO, GEAR CASE	1	
12	09160-06082	WASHER (6.5X13X1.0)	1	
13	09280-06012	O RING (D:1.7,ID:5.8)	1	
14	09280-13005	O RING (D:3.5,ID:12.8)	1	

DF30A P40
DF30AR P01
DF30AT P01
DF30ATH P01



FIG.210C (1-D-12) SHIFT ROD (DF30AQ)

DF30AQ P01

FIG.220A


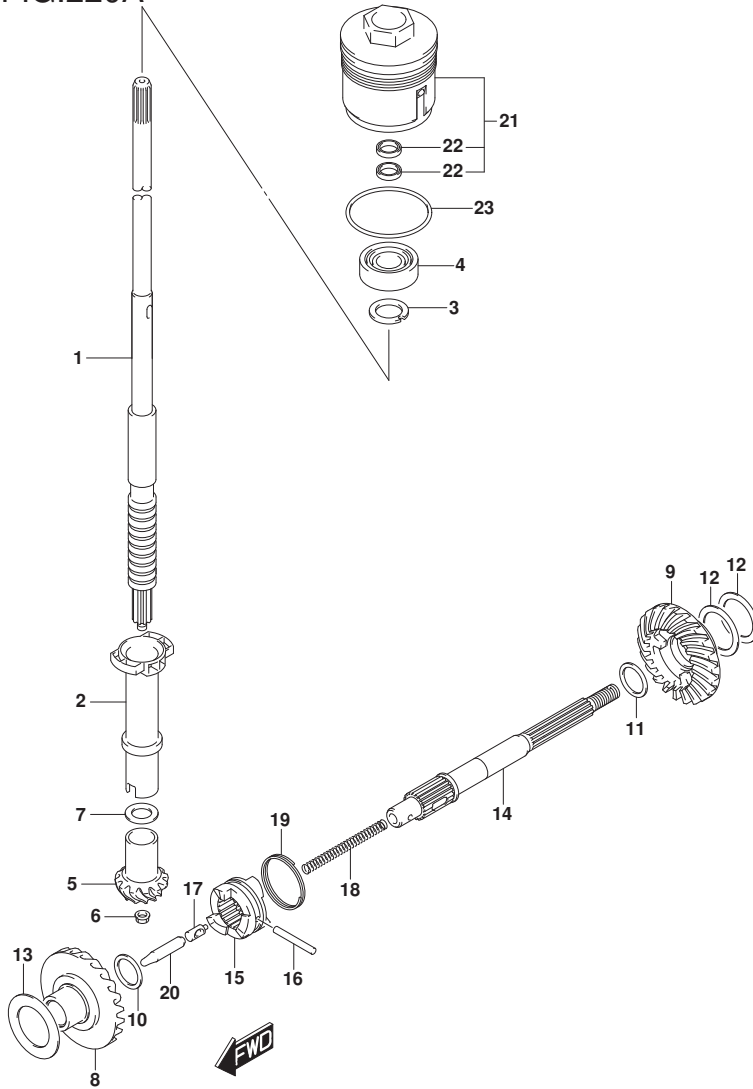


FIG.220A (1-D-13) TRANSMISSION (DF25A,DF25AR,DF25AT,DF25ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	57110-94L01	SHAFT, DRIVE (NT:10)	1	W/TRANSOM(S)
1-2	57110-94L11	SHAFT, DRIVE (NT:10)	1	W/TRANSOM(L)
2	57133-94L00	COLLAR, DRIVE SHAFT	1	
3	09166-17005	WASHER	1	
4	09265-17002	BEARING (17X40X17.25)	1	
5	57311-91L00	PINION (NT:11)	1	
6	09159-08046	NUT	1	
7-1	09160-15030	WASHER (15X20X1.7)	1	
7-2	09160-15031	WASHER (15X20X1.8)	1	
7-3	09160-15032	WASHER (15X20X1.9)	1	
7-4	08211-15203	WASHER (15X20X2.0)	1	
7-5	09160-15033	WASHER (15X20X2.1)	1	
7-6	08211-15204	WASHER (15X20X2.2)	1	
7-7	09160-15053	WASHER (15X20X2.3)	1	
7-8	09160-15054	WASHER (15X20X2.4)	1	
8	57510-94L00	GEAR, FORWARD (NT:23)	1	
9	57521-94L00	GEAR, REVERSE (NT:23)	1	
10	09181-16008	SHIM (16X24X2)	1	FWD
11-1	09160-20068	WASHER (ID:20,OD:25.6,T:1.6)	1	REV
11-2	09160-20069	WASHER (ID:20,OD:25.6,T:1.8)	1	REV
11-3	09160-20070	WASHER (ID:20,OD:25.6,T:2.0)	1	REV
11-4	09160-20071	WASHER (ID:20,OD:25.6,T:2.2)	1	REV
11-5	09160-20072	WASHER (ID:20,OD:25.6,T:2.4)	1	REV
11-6	09160-20073	WASHER (ID:20,OD:25.6,T:2.6)	1	REV
12-1	08221-30404	SHIM (30X40X0.2)	2	REV
12-2	09181-30158	SHIM (30X40X0.5)	1	REV
12-3	09181-30162	SHIM (30X40X0.8)	1	REV
13-1	09181-25190	SHIM (25X36X0.8)	1	FWD
13-2	09181-25248	SHIM (25X40X0.9)	1	FWD
13-3	09181-25251	SHIM (25X40X1)	1	FWD
13-4	09160-25032	SHIM (25X40X1.1)	1	FWD
13-5	09160-25033	SHIM (25X40X1.2)	1	FWD
13-6	09160-25034	SHIM (25X40X1.3)	1	FWD
13-7	09160-25035	SHIM (25X40X1.4)	1	FWD
13-8	09181-25268	SHIM (25X40X1.5)	1	FWD
14	57610-96311	SHAFT, PROPELLER	1	

FIG.220A

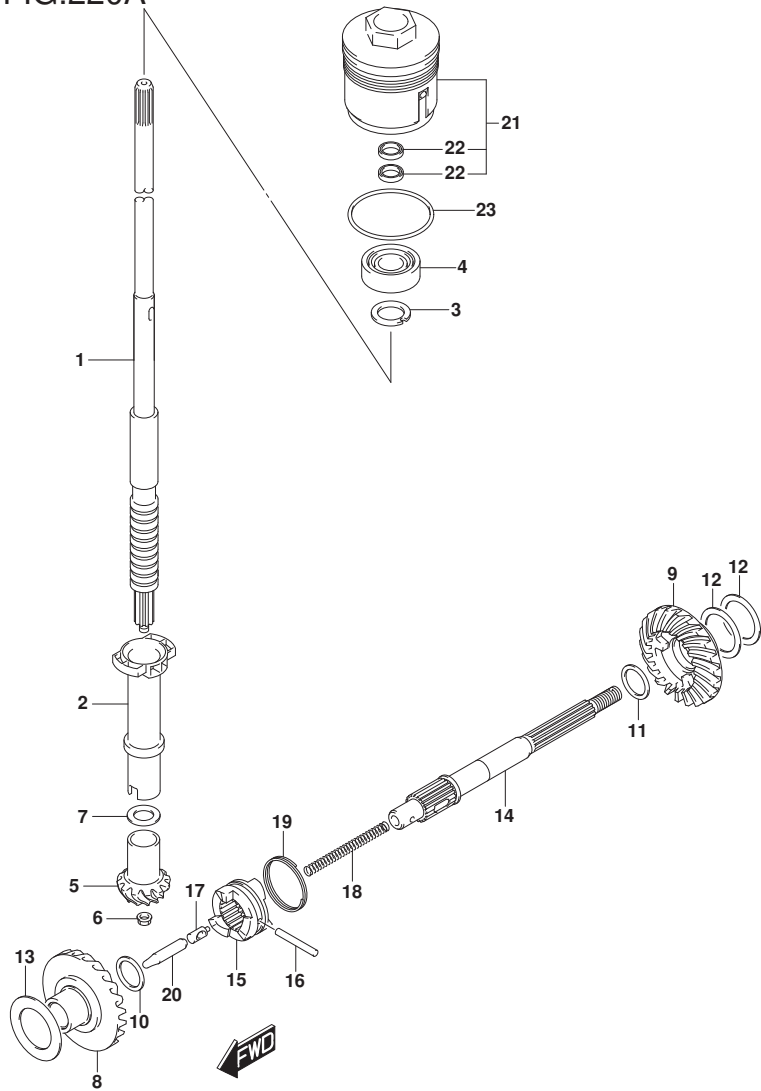

DF25A_30A_P01_022_220A
TRANSMISSION

FIG.220A (1-D-14) TRANSMISSION (DF25A,DF25AR,DF25AT,DF25ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
15	57621-91L21	SHIFTER, CLUTCH DOG	1	
16	09202-05021	PIN (5X34)	1	
17	09209-08016	PIN	1	
18	09440-07074	SPRING	1	
19	09440-35004	SPRING	1	
20	57631-95JL0	ROD, PUSH	1	
21	56130-94L00	HOUSING, DR SFT OIL SEAL	1	
22	09282-17006	.OIL SEAL (17X30X4.5)	2	
23	09280-50009	O RING (D:3.1,ID:48.7)	1	

DF25A P01
DF25AR P01
DF25AT P01
DF25ATH P01

FIG.220B


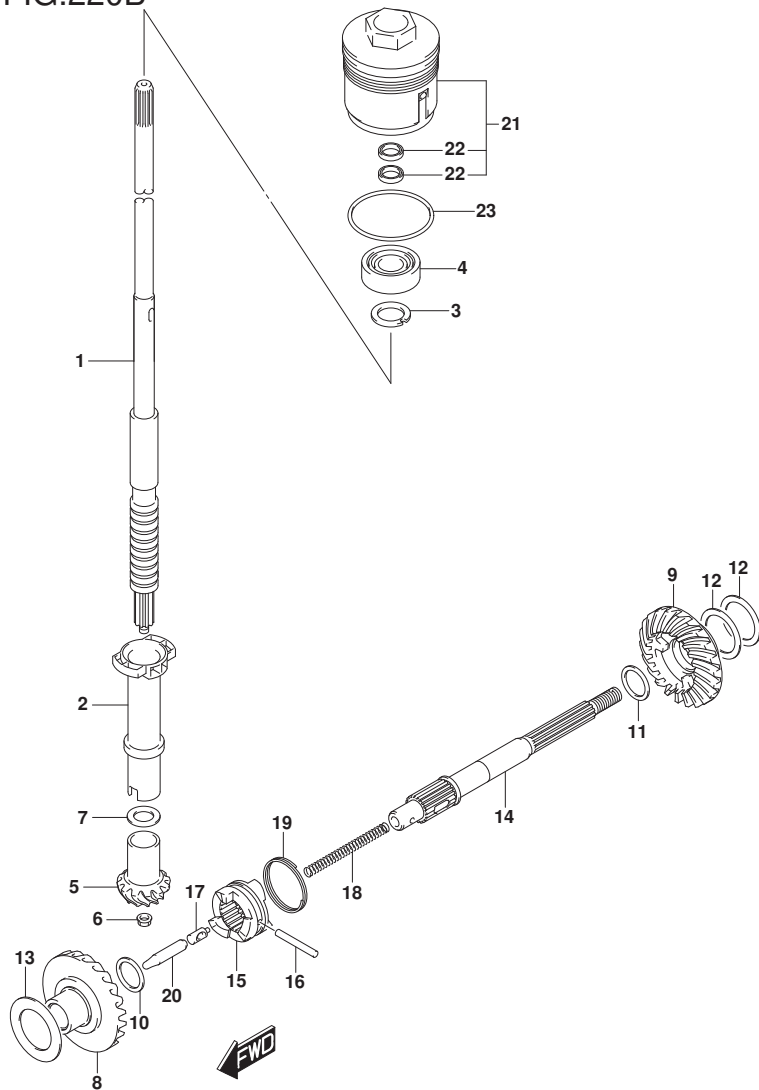


FIG.220B (1-E-2) TRANSMISSION (DF30A,DF30AR,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	57110-94L01	SHAFT, DRIVE (NT:10)	1	W/TRANSOM(S)
1-2	57110-94L11	SHAFT, DRIVE (NT:10)	1	W/TRANSOM(L)
2	57133-94L00	COLLAR, DRIVE SHAFT	1	
3	09166-17005	WASHER	1	
4	09265-17002	BEARING (17X40X17.25)	1	
5	57311-91L00	PINION (NT:11)	1	
6	09159-08046	NUT	1	
7-1	09160-15030	WASHER (15X20X1.7)	1	
7-2	09160-15031	WASHER (15X20X1.8)	1	
7-3	09160-15032	WASHER (15X20X1.9)	1	
7-4	08211-15203	WASHER (15X20X2.0)	1	
7-5	09160-15033	WASHER (15X20X2.1)	1	
7-6	08211-15204	WASHER (15X20X2.2)	1	
7-7	09160-15053	WASHER (15X20X2.3)	1	
7-8	09160-15054	WASHER (15X20X2.4)	1	
8	57510-94L00	GEAR, FORWARD (NT:23)	1	
9	57521-94L00	GEAR, REVERSE (NT:23)	1	
10	09181-16008	SHIM (16X24X2)	1	FWD
11-1	09160-20068	WASHER (ID:20,OD:25.6,T:1.6)	1	REV
11-2	09160-20069	WASHER (ID:20,OD:25.6,T:1.8)	1	REV
11-3	09160-20070	WASHER (ID:20,OD:25.6,T:2.0)	1	REV
11-4	09160-20071	WASHER (ID:20,OD:25.6,T:2.2)	1	REV
11-5	09160-20072	WASHER (ID:20,OD:25.6,T:2.4)	1	REV
11-6	09160-20073	WASHER (ID:20,OD:25.6,T:2.6)	1	REV
12-1	08221-30404	SHIM (30X40X0.2)	2	REV
12-2	09181-30158	SHIM (30X40X0.5)	1	REV
12-3	09181-30162	SHIM (30X40X0.8)	1	REV
13-1	09181-25190	SHIM (25X36X0.8)	1	FWD
13-2	09181-25248	SHIM (25X40X0.9)	1	FWD
13-3	09181-25251	SHIM (25X40X1)	1	FWD
13-4	09160-25032	SHIM (25X40X1.1)	1	FWD
13-5	09160-25033	SHIM (25X40X1.2)	1	FWD
13-6	09160-25034	SHIM (25X40X1.3)	1	FWD
13-7	09160-25035	SHIM (25X40X1.4)	1	FWD
13-8	09181-25268	SHIM (25X40X1.5)	1	FWD
14	57610-96311	SHAFT, PROPELLER	1	

FIG.220B

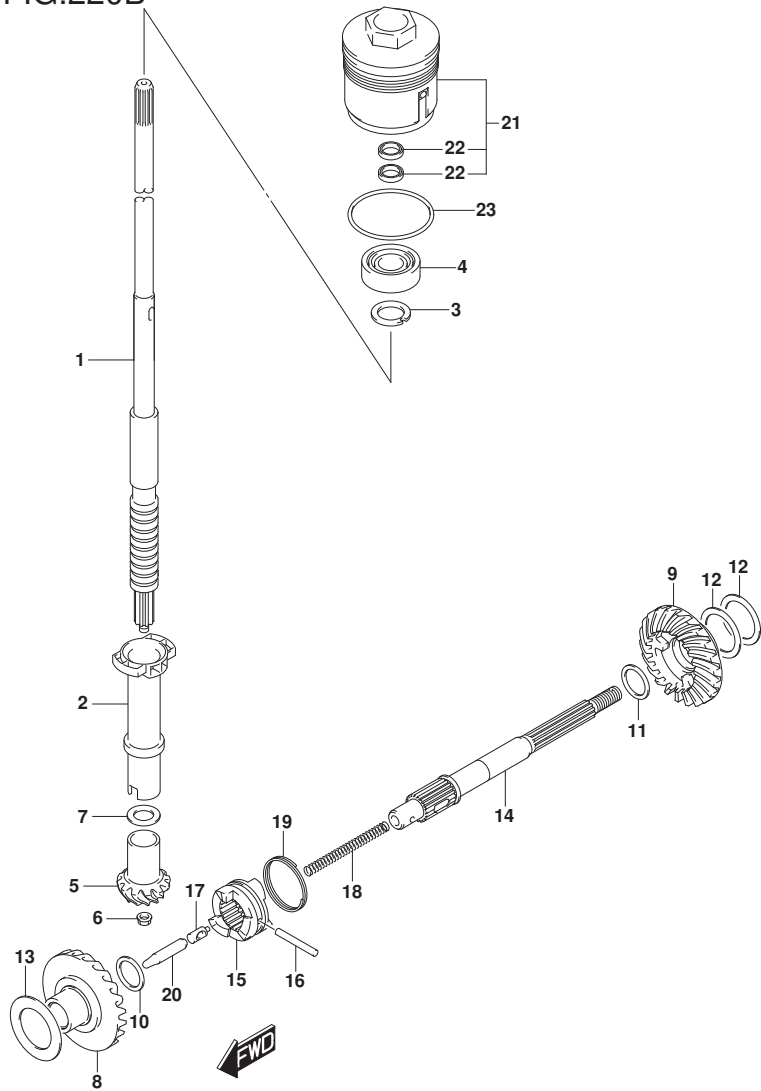

DF25A_30A_P01_022_220B
TRANSMISSION

FIG.220B (1-E-3) TRANSMISSION (DF30A,DF30AR,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
15	57621-91L21	SHIFTER, CLUTCH DOG	1	
16	09202-05021	PIN (5X34)	1	
17	09209-08016	PIN	1	
18	09440-07074	SPRING	1	
19	09440-35004	SPRING	1	
20	57631-95JL0	ROD, PUSH	1	
21	56130-94L00	HOUSING, DR SFT OIL SEAL	1	
22	09282-17006	.OIL SEAL (17X30X4.5)	2	
23	09280-50009	O RING (D:3.1,ID:48.7)	1	

DF30A P40
DF30AR P01
DF30AT P01
DF30ATH P01

This diagram illustrates the exploded view of a mechanical assembly, likely a planetary gear set. The components are numbered as follows:

- 1**: Main vertical shaft.
- 2**: Housing or support sleeve for the lower part of the shaft.
- 3**: Small ring or washer.
- 4**: Ring or sleeve component.
- 5**: Gear component.
- 6**: Small pin or screw.
- 7**: Ring or sleeve component.
- 8**: Gear component.
- 9**: Gear component.
- 10**: Ring or sleeve component.
- 11**: Ring or sleeve component.
- 12**: Gear component.
- 13**: Gear component.
- 14**: Horizontal shaft.
- 15**: Gear component.
- 16**: Ring or sleeve component.
- 17**: Pin or screw.
- 18**: Spring or coiled wire.
- 19**: Ring or sleeve component.
- 20**: Pin or screw.
- 21**: Housing or support sleeve for the upper part of the shaft.
- 22**: Small ring or washer.
- 23**: Ring or sleeve component.

A 'FWD' arrow is located at the bottom left, indicating the forward direction of rotation or movement.

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	57110-94L01	SHAFT, DRIVE (NT:10)	1	W/TRANSOM(S)
1-2	57110-94L11	SHAFT, DRIVE (NT:10)	1	W/TRANSOM(L)
1-3	57110-94L21	SHAFT, DRIVE (NT:10)	1	W/TRANSOM(X):(020,021)
2	57133-94L00	COLLAR, DRIVE SHAFT	1	
3	09166-17005	WASHER	1	
4	09265-17002	BEARING (17X40X17.25)	1	
5	57311-91L00	PINION (NT:11)	1	
6	09159-08046	NUT	1	
7-1	09160-15030	WASHER (15X20X1.7)	1	
7-2	09160-15031	WASHER (15X20X1.8)	1	
7-3	09160-15032	WASHER (15X20X1.9)	1	
7-4	08211-15203	WASHER (15X20X2.0)	1	
7-5	09160-15033	WASHER (15X20X2.1)	1	
7-6	08211-15204	WASHER (15X20X2.2)	1	
7-7	09160-15053	WASHER (15X20X2.3)	1	
7-8	09160-15054	WASHER (15X20X2.4)	1	
8	57510-94L00	GEAR, FORWARD (NT:23)	1	
9	57521-94L00	GEAR, REVERSE (NT:23)	1	
10	09181-16008	SHIM (16X24X2)	1	FWD
11-1	09160-20068	WASHER (ID:20,OD:25.6,T:1.6)	1	REV
11-2	09160-20069	WASHER (ID:20,OD:25.6,T:1.8)	1	REV
11-3	09160-20070	WASHER (ID:20,OD:25.6,T:2.0)	1	REV
11-4	09160-20071	WASHER (ID:20,OD:25.6,T:2.2)	1	REV
11-5	09160-20072	WASHER (ID:20,OD:25.6,T:2.4)	1	REV
11-6	09160-20073	WASHER (ID:20,OD:25.6,T:2.6)	1	REV
12-1	08221-30404	SHIM (30X40X0.2)	2	REV
12-2	09181-30158	SHIM (30X40X0.5)	1	REV
12-3	09181-30162	SHIM (30X40X0.8)	1	REV
13-1	09181-25190	SHIM (25X36X0.8)	1	FWD
13-2	09181-25248	SHIM (25X40X0.9)	1	FWD
13-3	09181-25251	SHIM (25X40X1)	1	FWD
13-4	09160-25032	SHIM (25X40X1.1)	1	FWD
13-5	09160-25033	SHIM (25X40X1.2)	1	FWD
13-6	09160-25034	SHIM (25X40X1.3)	1	FWD
13-7	09160-25035	SHIM (25X40X1.4)	1	FWD
13-8	09181-25268	SHIM (25X40X1.5)	1	FWD

FIG.220C

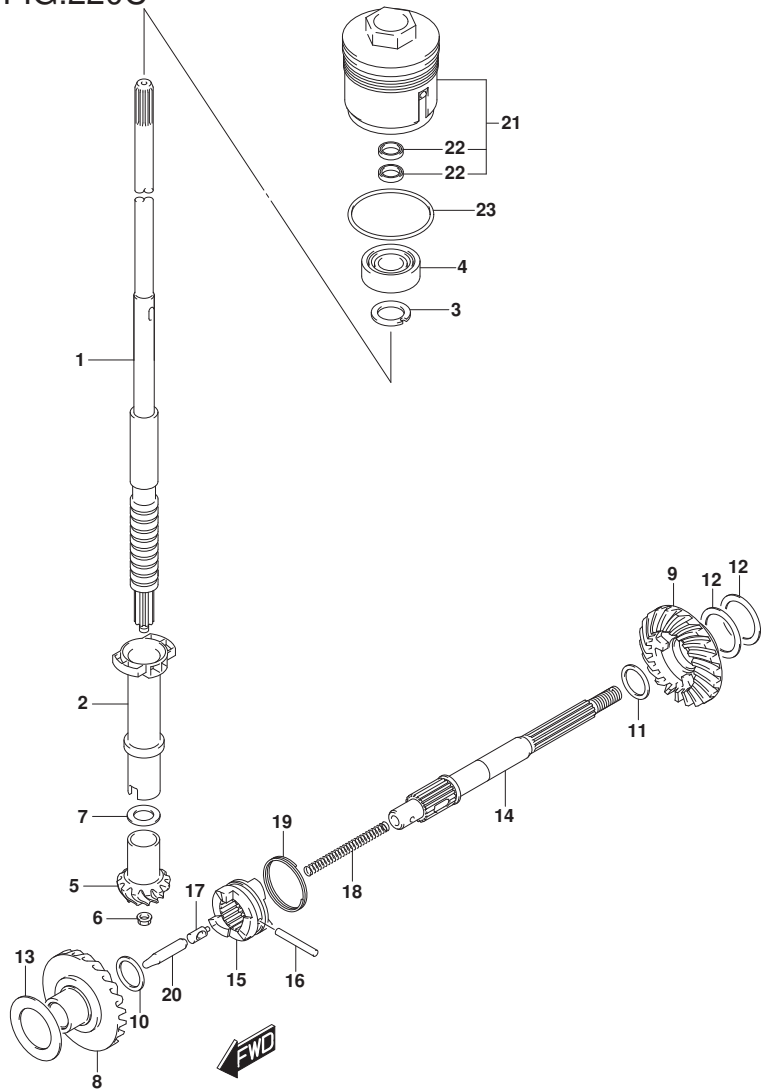


FIG.220C (1-E-5) TRANSMISSION (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
14	57610-96311	SHAFT, PROPELLER	1	
15	57621-91L21	SHIFTER, CLUTCH DOG	1	
16	09202-05021	PIN (5X34)	1	
17	09209-08016	PIN	1	
18	09440-07074	SPRING	1	
19	09440-35004	SPRING	1	
20	57631-95JL0	ROD, PUSH	1	
21	56130-94L00	HOUSING, DR SFT OIL SEAL	1	
22	09282-17006	.OIL SEAL (17X30X4.5)	2	
23	09280-50009	O RING (D:3.1,ID:48.7)	1	

DF30AQ P01

FIG.301A

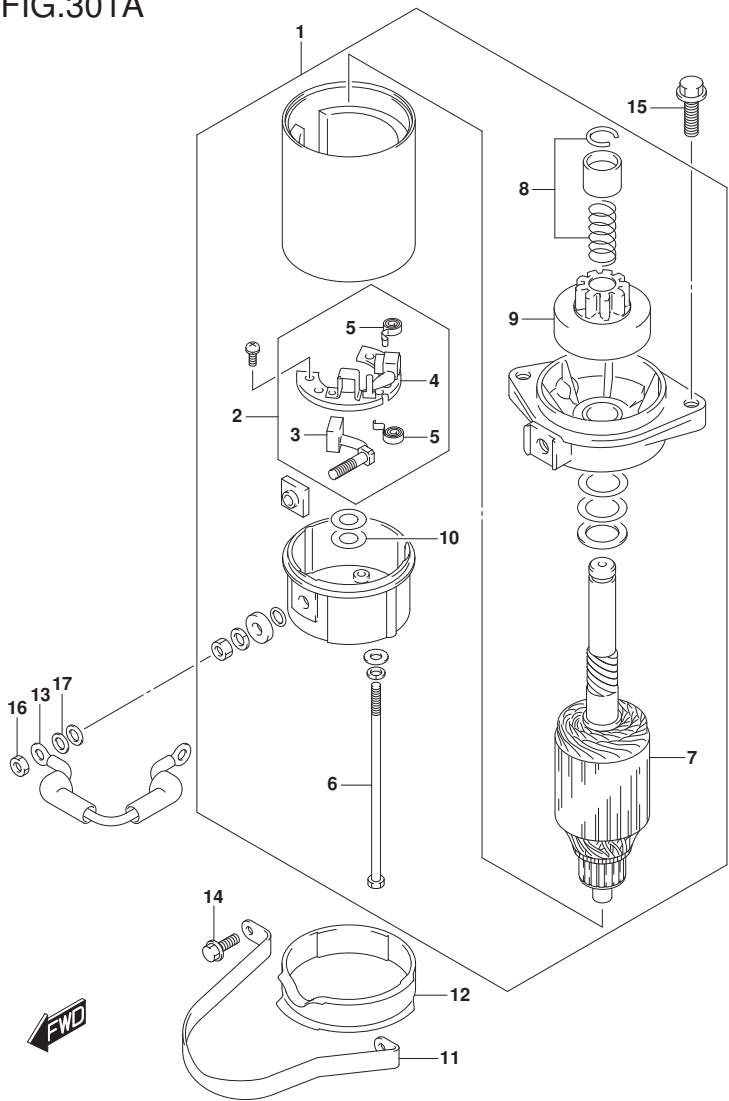


FIG.301A (1-E-6) STARTING MOTOR (DF25A,DF25AR,DF25ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	31100-94402	MOTOR ASSY, STARTING	1	
2	31173-89J00	.HOLDER ASSY, BRUSH	1	
3	31131-96300	..BRUSH, PLUS	1	
4	31132-96300	..BRUSH, MINUS	1	
5	31135-89J00	..SPRING	2	
6	31281-93340	.BOLT, THROUGH	2	
7	31310-96300	ARMATURE	1	
8	31312-96300	.STOPPER SET, PINION	1	
9	31320-94400	.PINION ASSY	1	
10	31360-96300	.WASHER SET	1	
11	31912-94L00	BAND, STARTER MOTOR	1	
12	31918-94402	DAMPER, LOWER	1	LOWER
13	33820-89E01	CABLE, PLUS TERM TO RELAY	1	
14	01550-06167	BOLT (6X16)	2	
15	01550-08257	BOLT (8X25)	2	
16	08310-00067	NUT	1	
17	08321-01067	LOCK WASHER	1	

DF25A P01
DF25AR P01
DF25ATH P01

FIG.301B

FIG.301B (1-E-7) STARTING MOTOR (DF25AT,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	31100-94402	MOTOR ASSY, STARTING	1	
2	31173-89J00	.HOLDER ASSY, BRUSH	1	
3	31131-96300	..BRUSH, PLUS	1	
4	31132-96300	..BRUSH, MINUS	1	
5	31135-89J00	..SPRING	2	
6	31281-93340	.BOLT, THROUGH	2	
7	31310-96300	ARMATURE	1	
8	31312-96300	.STOPPER SET, PINION	1	
9	31320-94400	.PINION ASSY	1	
10	31360-96300	.WASHER SET	1	
11	31912-94L00	BAND, STARTER MOTOR	1	
12	31918-94402	DAMPER, LOWER	1	LOWER
13	33820-89E01	CABLE, PLUS TERM TO RELAY	1	
14	01550-06167	BOLT (6X16)	2	
15	01550-08257	BOLT (8X25)	2	
16	08310-00067	NUT	1	
17	08321-01067	LOCK WASHER	1	
18	36617-94L00	BRACKET, HARNESS	1	
19	01550-0616C	BOLT	1	

DF25AT P01
DF30AT P01

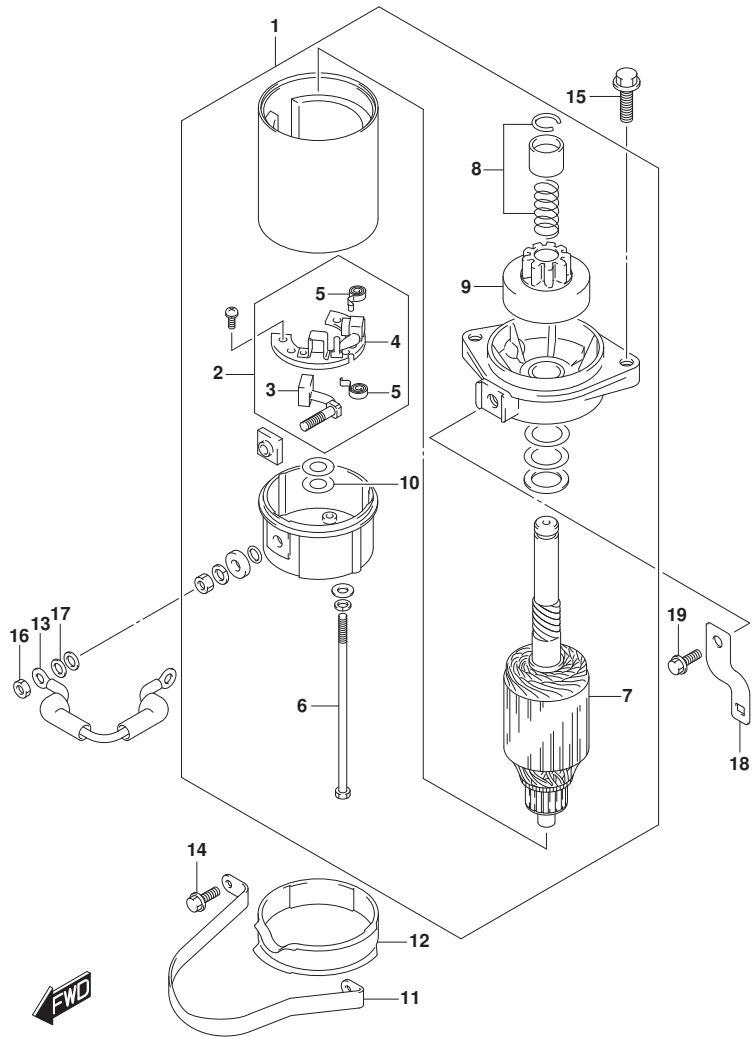


FIG.301C

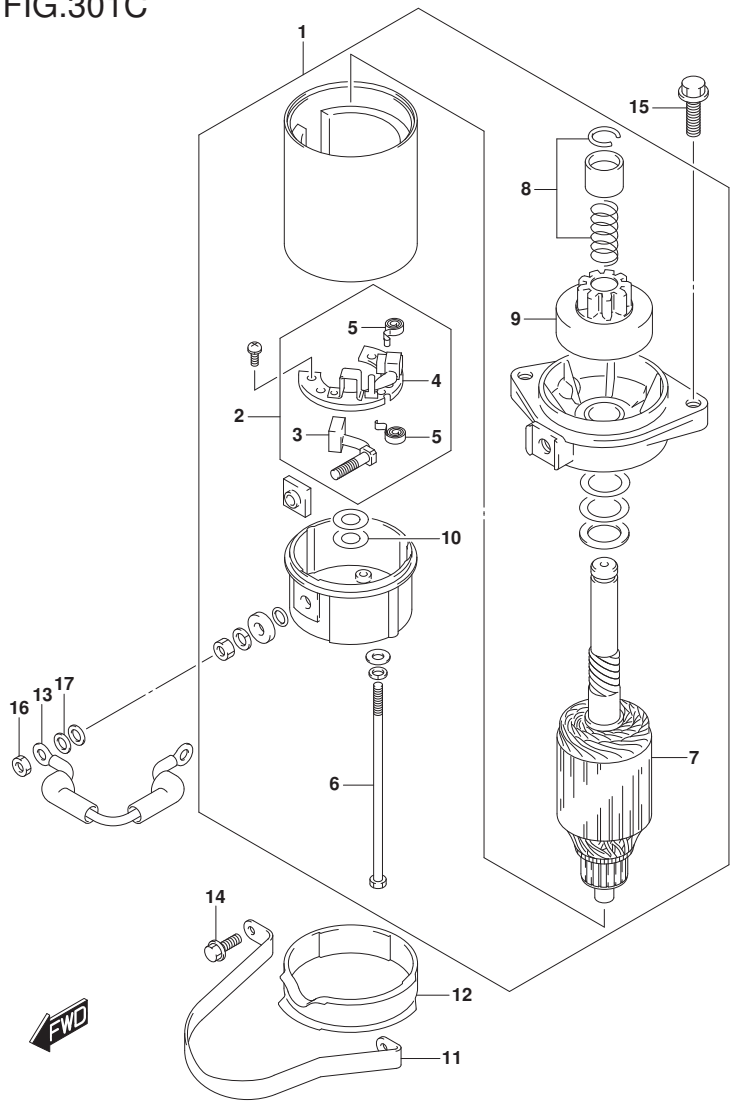


FIG.301C (1-E-8) STARTING MOTOR (DF30A,DF30AR,DF30ATH,DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	31100-94402	MOTOR ASSY, STARTING	1	
2	31173-89J00	.HOLDER ASSY, BRUSH	1	
3	31131-96300	..BRUSH, PLUS	1	
4	31132-96300	..BRUSH, MINUS	1	
5	31135-89J00	..SPRING	2	
6	31281-93340	.BOLT, THROUGH	2	
7	31310-96300	ARMATURE	1	
8	31312-96300	.STOPPER SET, PINION	1	
9	31320-94400	.PINION ASSY	1	
10	31360-96300	.WASHER SET	1	
11	31912-94L00	BAND, STARTER MOTOR	1	
12	31918-94402	DAMPER, LOWER	1	LOWER
13	33820-89E01	CABLE, PLUS TERM TO RELAY	1	
14	01550-06167	BOLT (6X16)	2	
15	01550-08257	BOLT (8X25)	2	
16	08310-00067	NUT	1	
17	08321-01067	LOCK WASHER	1	

DF30A P40
DF30AQ P01
DF30AR P01
DF30ATH P01

FIG.303A

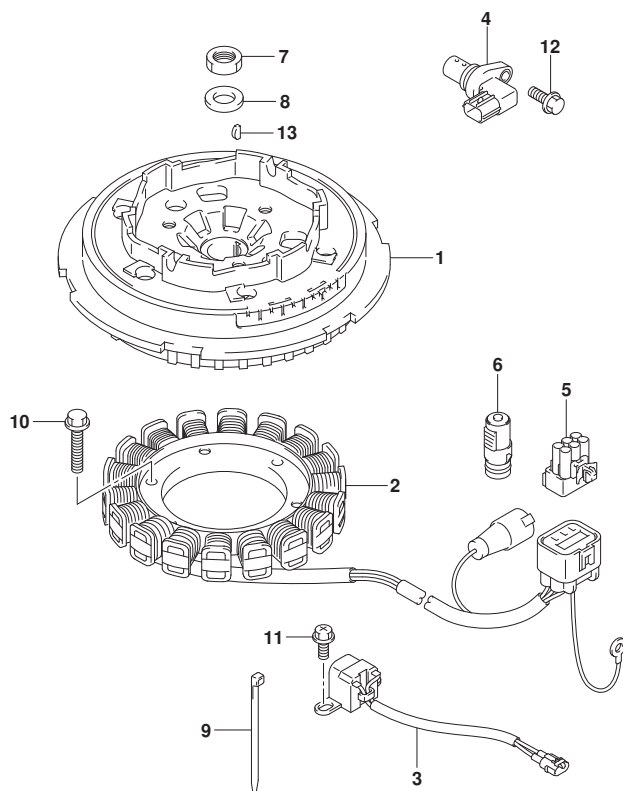


FIG.303A (1-E-9) MAGNETO (W/MANUAL STARTER)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	32102-94L00	FLYWHEEL, MAGNETO	1	
2	32120-94L00	COIL, STATOR	1	
3	32160-94L01	COIL, IGN TIMING	1	
4	33220-64L00	SENSOR ASSY, POSN	1	
5	36690-94L00	CONNECTOR ASSY, DUMMY	1	
6	36690-94L10	CONNECTOR ASSY, DUMMY	1	
7	09140-14008	NUT (M14)	1	
8	09160-15057	WASHER (15X27X4)	1	
9	09407-14407	CLAMP (L:145)	1	
10	01547-0625A	BOLT	3	
11	01550-0512C	BOLT	2	KEROSENE
12	01550-0616C	BOLT	1	
13	08341-31039	KEY	1	

DF25A P01
DF30A P40
DF30AQ P01



FIG.303B

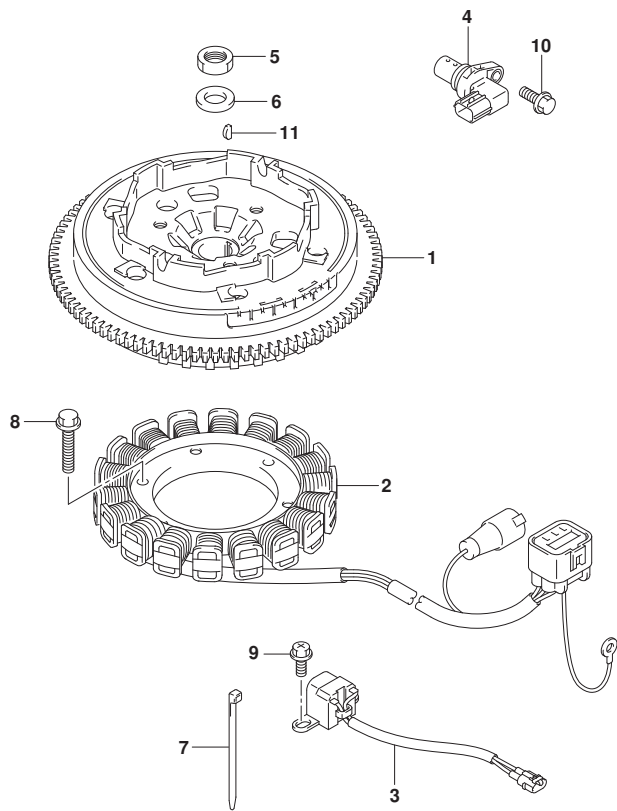



FIG.303B (1-E-10) MAGNETO (W/ELECTRIC STARTER)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	32102-94L10	FLYWHEEL, MAGNETO	1	
2	32120-94L00	COIL, STATOR	1	
3	32160-94L01	COIL, IGN TIMING	1	
4	33220-64L00	SENSOR ASSY, POSN	1	
5	09140-14008	NUT (M14)	1	
6	09160-15057	WASHER (15X27X4)	1	
7	09407-14407	CLAMP (L:145)	1	
8	01547-0625A	BOLT	3	
9	01550-0512C	BOLT	2	KEROSENE
10	01550-0616C	BOLT	1	
11	08341-31039	KEY	1	

- DF25A P01
- DF25AR P01
- DF25AT P01
- DF25ATH P01
- DF30A P40
- DF30AQ P01
- DF30AR P01
- DF30AT P01
- DF30ATH P01



FIG.310A

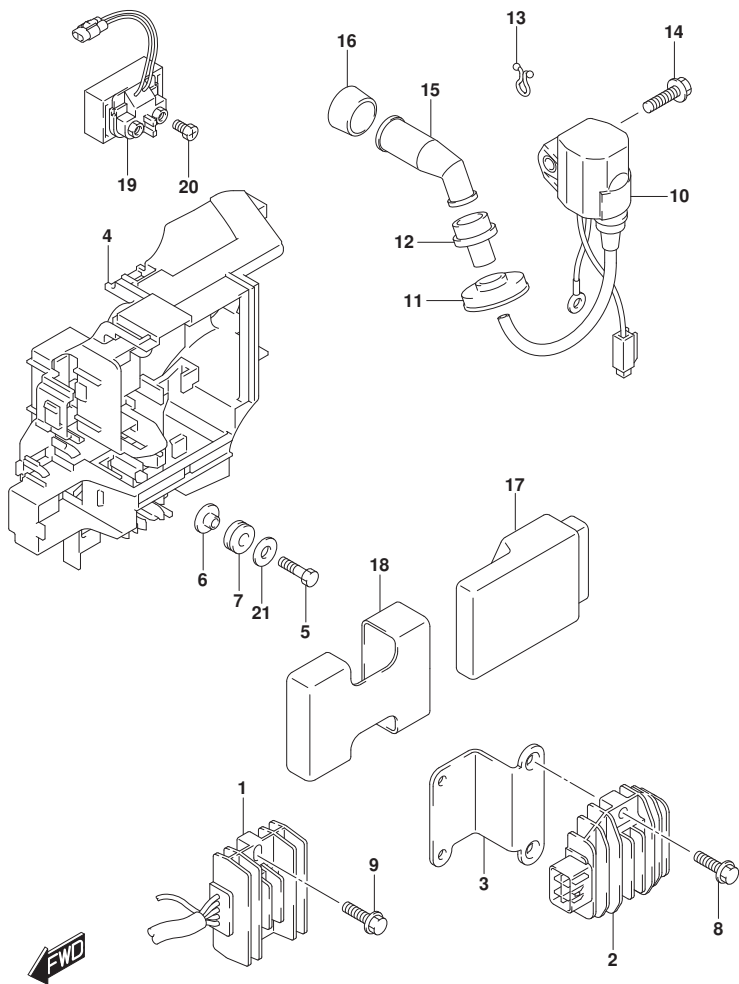

DF25A_30A_P01_022_310A
RECTIFIER/IGNITION COIL

FIG.310A (1-E-11) RECTIFIER/IGNITION COIL (DF25A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	32800-94L01	RECTIFIER & REGULATOR ASSY	1	
2	32800-88L01	RECTIFIER & REGULATOR ASSY	1	W/ELECTRIC STARTER
3	32815-94L01	BRACKET, RECTIFIER	1	W/ELECTRIC STARTER
4	32890-94L00	HOLDER, ELECTRIC PARTS	1	
5	01550-06207	BOLT (6X20)	3	
6	09169-06095	WASHER (ID:6.3,L:7.6)	3	
7	09320-08515	CUSHION	3	
8	01550-0620C	BOLT	2	W/ELECTRIC STARTER
9	01550-06257	BOLT (6X25)	2	
10	33410-94L00	COIL, IGNITION	3	
11	33446-94L00	PROTECTOR, HIGH TENSION CORD	3	
12	33542-16H00	SEAL, HIGH TENSION CORD	3	
13	09408-00020	CLIP (ID:8.3)	2	
14	01550-06207	BOLT (6X20)	3	
15	33510-16H10	CAP ASSY, SPARK PLUG	3	
16	33541-16H00	SEAL, SPARK PLUG	3	
17	33920-94L60	UNIT, ENGINE CONTROL	1	
18	33925-94L00	CUSHION, ENGINE CONTROL UNIT	1	
19	31800-94L01	RELAY ASSY, STARTER MOTOR	1	W/ELECTRIC STARTER
20	09128-06093	SCREW (6X8)	2	W/ELECTRIC STARTER
21	08322-01067	WASHER	3	

DF25A P01

FIG.310B

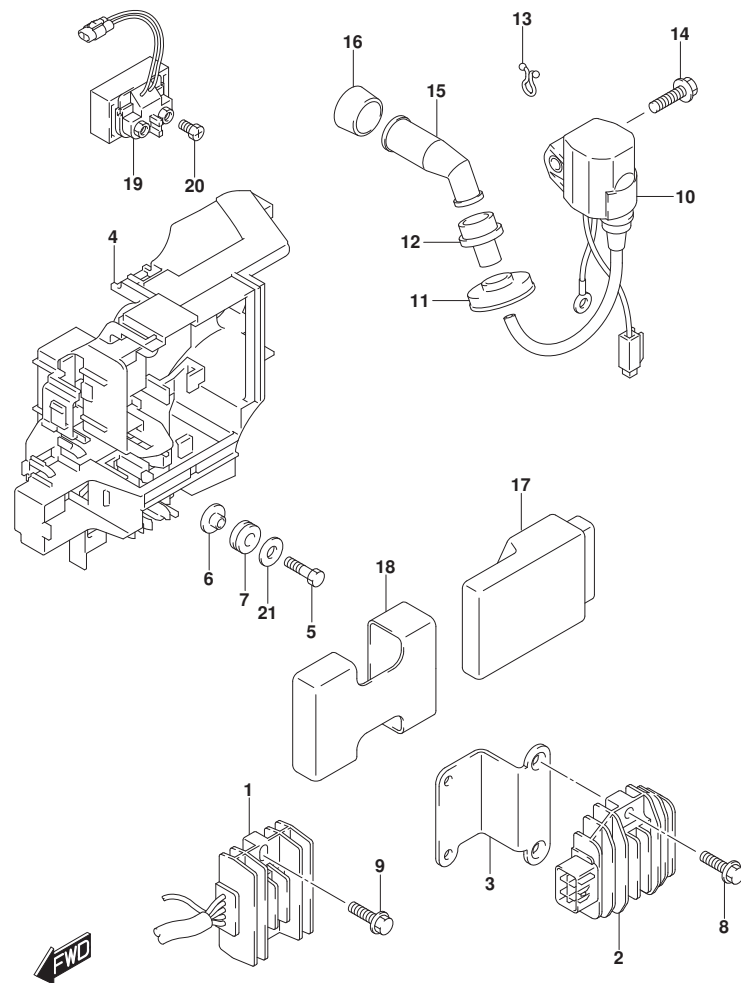


FIG.310B (1-E-12) RECTIFIER/IGNITION COIL (DF25AR,DF25AT,DF25ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	32800-94L01	RECTIFIER & REGULATOR ASSY	1	
2	32800-88L01	RECTIFIER & REGULATOR ASSY	1	
3	32815-94L01	BRACKET, RECTIFIER	1	
4	32890-94L00	HOLDER, ELECTRIC PARTS	1	
5	01550-06207	BOLT (6X20)	3	
6	09169-06095	WASHER (ID:6.3,L:7.6)	3	
7	09320-08515	CUSHION	3	
8	01550-0620C	BOLT	2	
9	01550-06257	BOLT (6X25)	2	
10	33410-94L00	COIL, IGNITION	3	
11	33446-94L00	PROTECTOR, HIGH TENSION CORD	3	
12	33542-16H00	SEAL, HIGH TENSION CORD	3	
13	09408-00020	CLIP (ID:8.3)	2	
14	01550-06207	BOLT (6X20)	3	
15	33510-16H10	CAP ASSY, SPARK PLUG	3	
16	33541-16H00	SEAL, SPARK PLUG	3	
17	33920-94L60	UNIT, ENGINE CONTROL	1	
18	33925-94L00	CUSHION, ENGINE CONTROL UNIT	1	
19	31800-94L01	RELAY ASSY, STARTER MOTOR	1	
20	09128-06093	SCREW (6X8)	2	
21	08322-01067	WASHER	3	

DF25AR P01
DF25AT P01
DF25ATH P01

FIG.310C

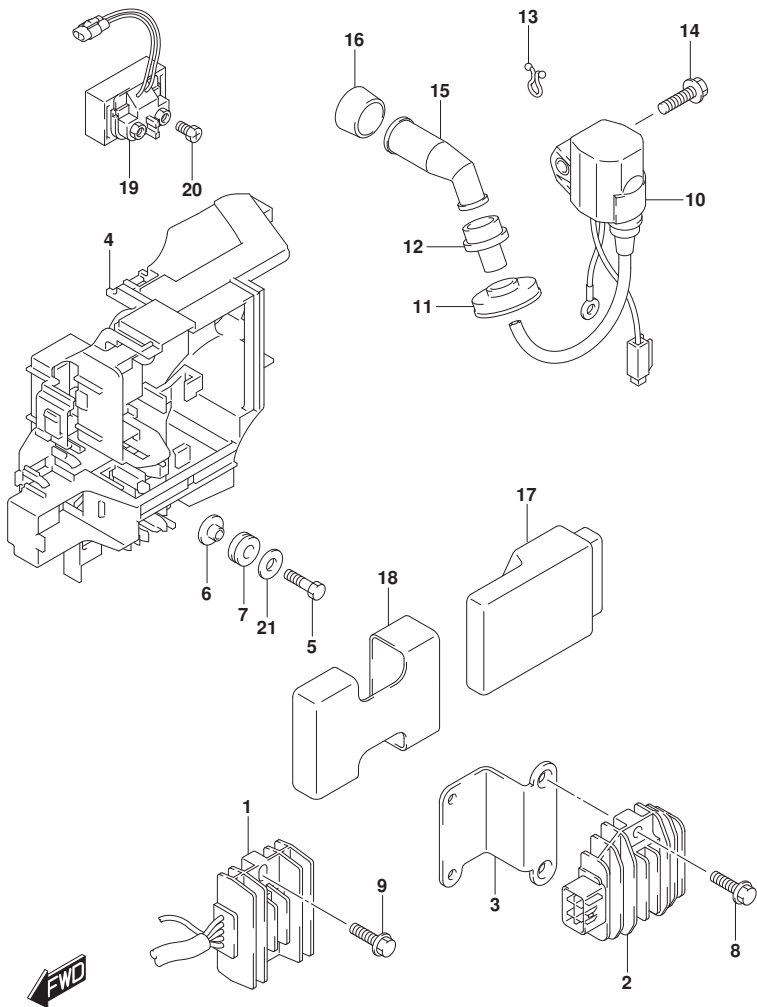


FIG.310C (1-E-13) RECTIFIER/IGNITION COIL (DF30A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	32800-94L01	RECTIFIER & REGULATOR ASSY	1	
2	32800-88L01	RECTIFIER & REGULATOR ASSY	1	W/ELECTRIC STARTER
3	32815-94L01	BRACKET, RECTIFIER	1	W/ELECTRIC STARTER
4	32890-94L00	HOLDER, ELECTRIC PARTS	1	
5	01550-06207	BOLT (6X20)	3	
6	09169-06095	WASHER (ID:6.3,L:7.6)	3	
7	09320-08515	CUSHION	3	
8	01550-0620C	BOLT	2	W/ELECTRIC STARTER
9	01550-06257	BOLT (6X25)	2	
10	33410-94L00	COIL, IGNITION	3	
11	33446-94L00	PROTECTOR, HIGH TENSION CORD	3	
12	33542-16H00	SEAL, HIGH TENSION CORD	3	
13	09408-00020	CLIP (ID:8.3)	2	
14	01550-06207	BOLT (6X20)	3	
15	33510-16H10	CAP ASSY, SPARK PLUG	3	
16	33541-16H00	SEAL, SPARK PLUG	3	
17	33920-94L80	UNIT, ENGINE CONTROL	1	
18	33925-94L00	CUSHION, ENGINE CONTROL UNIT	1	
19	31800-94L01	RELAY ASSY, STARTER MOTOR	1	W/ELECTRIC STARTER
20	09128-06093	SCREW (6X8)	2	W/ELECTRIC STARTER
21	08322-01067	WASHER	3	

DF30A P40

FIG.310D

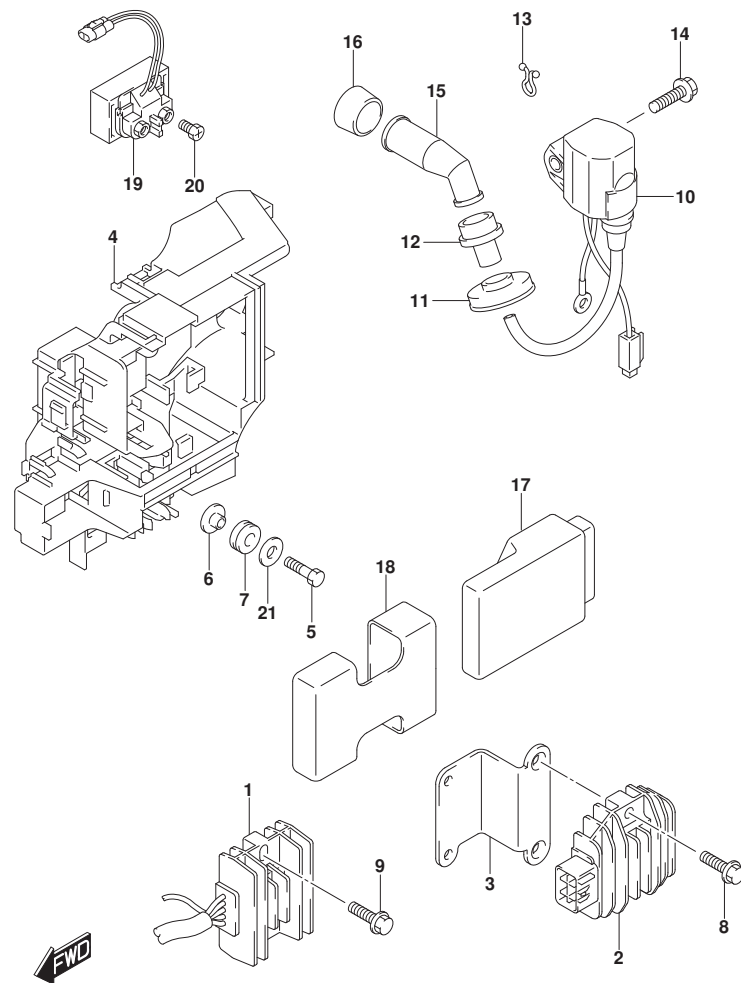


FIG.310D (1-E-14) RECTIFIER/IGNITION COIL (DF30AR,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	32800-94L01	RECTIFIER & REGULATOR ASSY	1	
2	32800-88L01	RECTIFIER & REGULATOR ASSY	1	
3	32815-94L01	BRACKET, RECTIFIER	1	
4	32890-94L00	HOLDER, ELECTRIC PARTS	1	
5	01550-06207	BOLT (6X20)	3	
6	09169-06095	WASHER (ID:6.3,L:7.6)	3	
7	09320-08515	CUSHION	3	
8	01550-0620C	BOLT	2	
9	01550-06257	BOLT (6X25)	2	
10	33410-94L00	COIL, IGNITION	3	
11	33446-94L00	PROTECTOR, HIGH TENSION CORD	3	
12	33542-16H00	SEAL, HIGH TENSION CORD	3	
13	09408-00020	CLIP (ID:8.3)	2	
14	01550-06207	BOLT (6X20)	3	
15	33510-16H10	CAP ASSY, SPARK PLUG	3	
16	33541-16H00	SEAL, SPARK PLUG	3	
17	33920-94L70	UNIT, ENGINE CONTROL	1	
18	33925-94L00	CUSHION, ENGINE CONTROL UNIT	1	
19	31800-94L01	RELAY ASSY, STARTER MOTOR	1	
20	09128-06093	SCREW (6X8)	2	
21	08322-01067	WASHER	3	

DF30AR P01
DF30AT P01
DF30ATH P01

FIG.310E

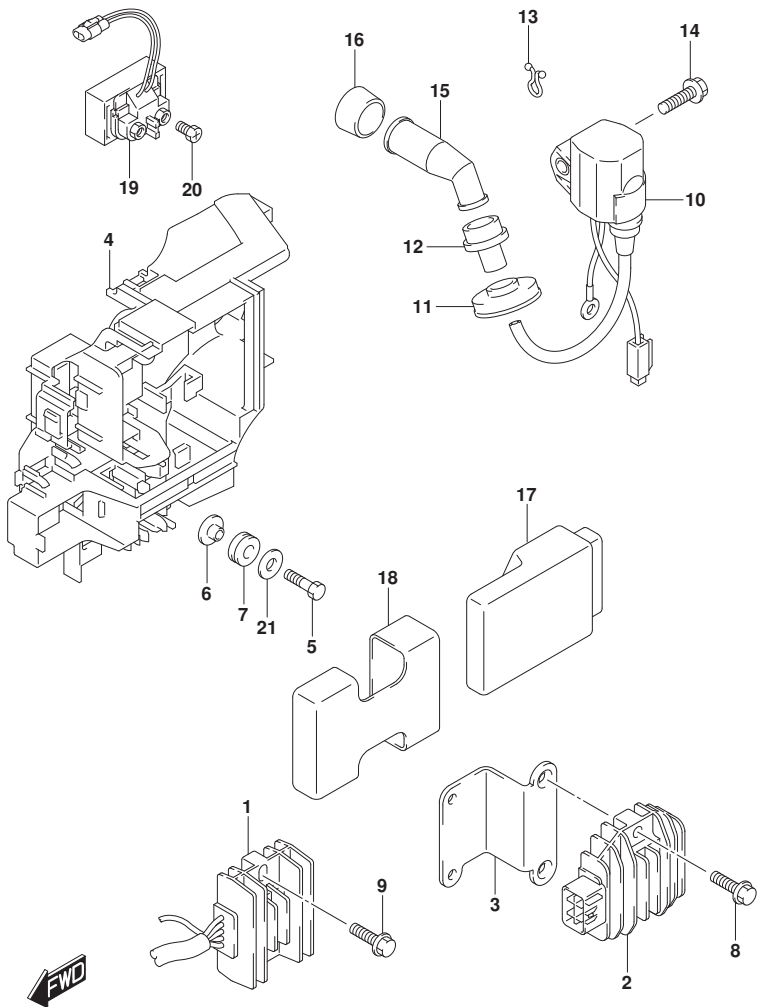


FIG.310E (1-F-2) RECTIFIER/IGNITION COIL (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	32800-94L01	RECTIFIER & REGULATOR ASSY	1	
2	32800-88L01	RECTIFIER & REGULATOR ASSY	1	W/ELECTRIC STARTER
3	32815-94L01	BRACKET, RECTIFIER	1	W/ELECTRIC STARTER
4	32890-94L00	HOLDER, ELECTRIC PARTS	1	
5	01550-06207	BOLT (6X20)	3	
6	09169-06095	WASHER (ID:6.3,L:7.6)	3	
7	09320-08515	CUSHION	3	
8	01550-0620C	BOLT	2	W/ELECTRIC STARTER
9	01550-06257	BOLT (6X25)	2	
10	33410-94L00	COIL, IGNITION	3	
11	33446-94L00	PROTECTOR, HIGH TENSION CORD	3	
12	33542-16H00	SEAL, HIGH TENSION CORD	3	
13	09408-00020	CLIP (ID:8.3)	2	
14	01550-06207	BOLT (6X20)	3	
15	33510-16H10	CAP ASSY, SPARK PLUG	3	
16	33541-16H00	SEAL, SPARK PLUG	3	
17	33920-94L70	UNIT, ENGINE CONTROL	1	
18	33925-94L00	CUSHION, ENGINE CONTROL UNIT	1	
19	31800-94L01	RELAY ASSY, STARTER MOTOR	1	W/ELECTRIC STARTER
20	09128-06093	SCREW (6X8)	2	W/ELECTRIC STARTER
21	08322-01067	WASHER	3	

DF30AQ P01

FIG.322A


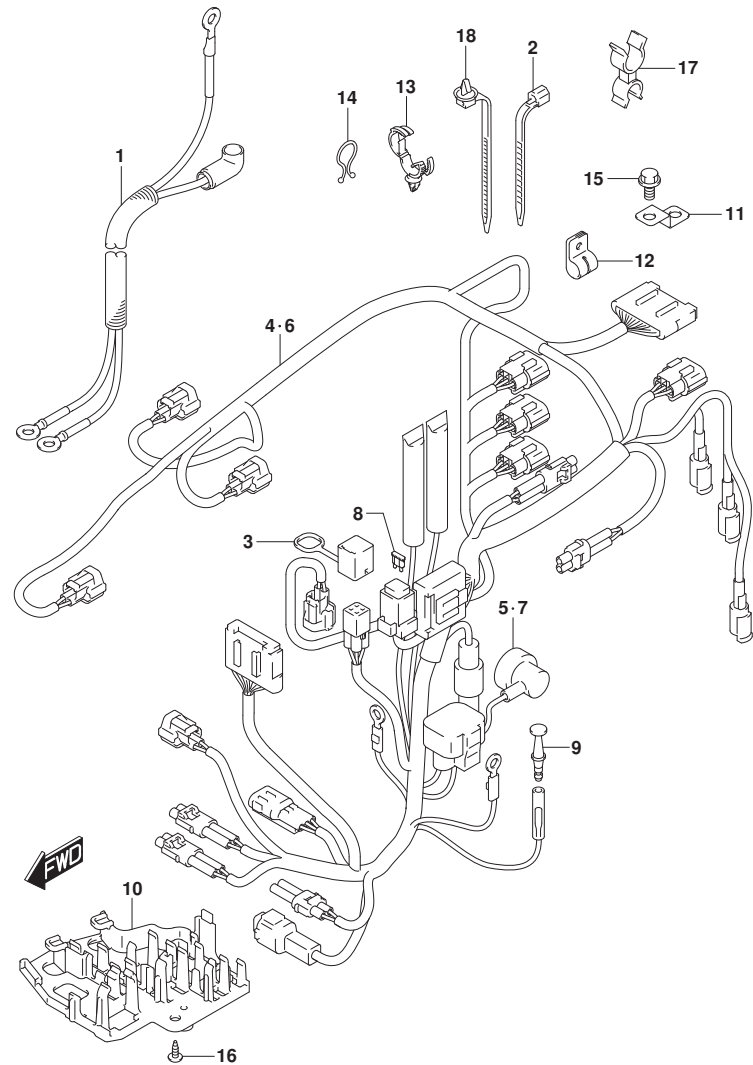


FIG.322A (1-F-3) HARNESS (DF25A,DF30A,DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	33810-94L01	CABLE, STARTER	1	W/ELECTRIC STARTER
2	09407-18402	CLAMP (L:165)	1	W/ELECTRIC STARTER
3	33634-94L00	CAP, SERVICE CONNECTOR	1	
4	36610-94L01	HARNESS ASSY, WIRING	1	W/MANUAL STARTER
5	36618-43410	.CAP, OIL PRESSURE SWITCH	1	W/MANUAL STARTER
6	36610-94L11	HARNESS ASSY, WIRING	1	W/ELECTRIC STARTER
7	36618-43410	.CAP, OIL PRESSURE SWITCH	1	W/ELECTRIC STARTER
8	09481-30501	.FUSE (30A)	1	W/ELECTRIC STARTER
9	36615-96300	TERMINAL	1	
10	36616-94L00	HOLDER, CONNECTOR	1	
11	36617-93J10	BRACKET, HARNESS	1	
12	09403-08417	CLAMP	1	
13	09403-20308	CLAMP	1	
14	09408-00008	CLIP (ID:20)	3	
15	01550-0612C	BOLT	1	
16	03542-05169	SCREW	2	
17	09408-00054	CLAMP	1	
18	36991-94L00	CLAMP, HARNESS	1	

DF25A P01
DF30A P40
DF30AQ P01

FIG.322B

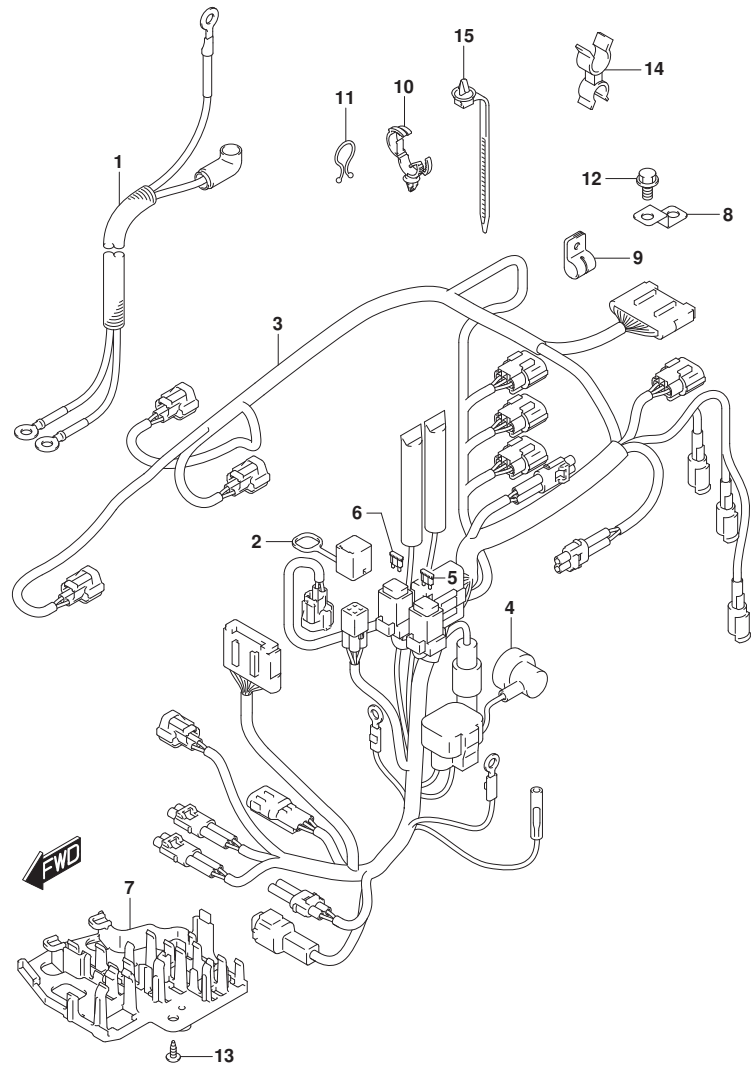


DF25A_30A_P01_022_322B
HARNESS

FIG.322B (1-F-4) HARNESS (DF25AR,DF30AR)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	33810-94L01	CABLE, STARTER	1	
2	33634-94L00	CAP, SERVICE CONNECTOR	1	
3	36610-94L21	HARNESS ASSY, WIRING	1	
4	36618-43410	.CAP, OIL PRESSURE SWITCH	1	
5	09481-10501	.FUSE (10A)	1	
6	09481-30501	.FUSE (30A)	1	
7	36616-94L00	HOLDER, CONNECTOR	1	
8	36617-93J10	BRACKET, HARNESS	1	
9	09403-08417	CLAMP	1	
10	09403-20308	CLAMP	1	
11	09408-00008	CLIP (ID:20)	3	
12	01550-0612C	BOLT	1	
13	03542-05169	SCREW	2	
14	09408-00054	CLAMP	1	
15	36991-94L00	CLAMP, HARNESS	1	

DF25AR P01
DF30AR P01

FIG.322C

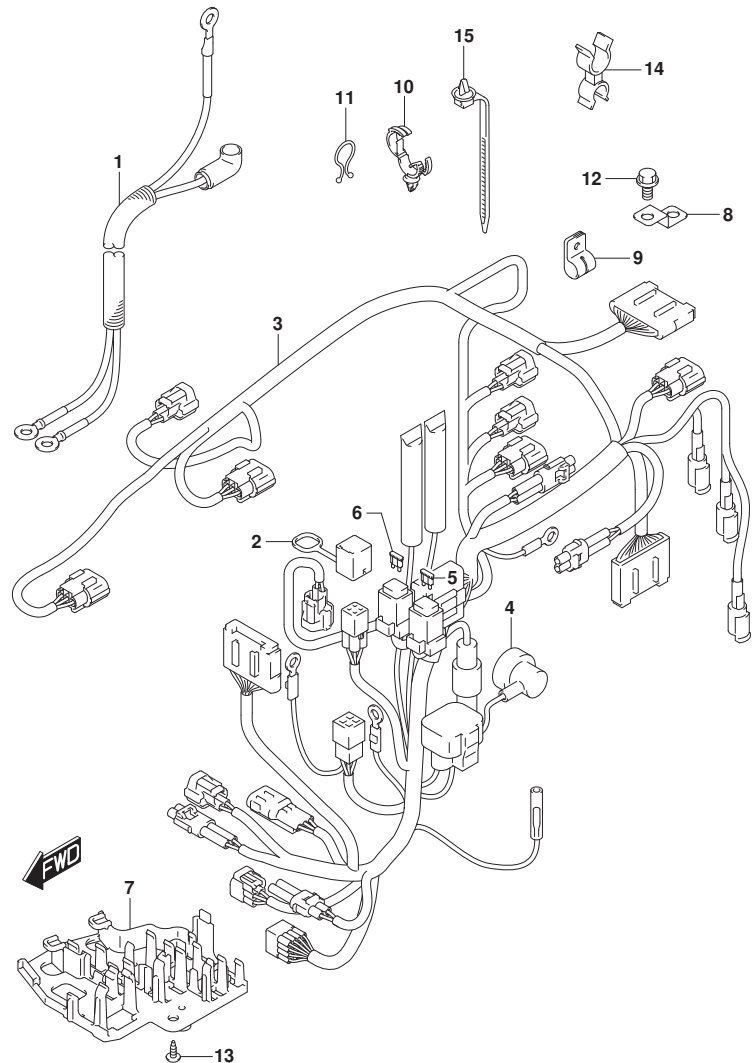


DF25A_30A_P01_022_322C
HARNESS

FIG.322C (1-F-5) HARNESS (DF25AT,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	33810-94L01	CABLE, STARTER	1	
2	33634-94L00	CAP, SERVICE CONNECTOR	1	
3	36610-94L42	HARNESS ASSY, WIRING	1	
4	36618-43410	.CAP, OIL PRESSURE SWITCH	1	
5	09481-10501	.FUSE (10A)	1	
6	09481-30501	.FUSE (30A)	1	
7	36616-94L00	HOLDER, CONNECTOR	1	
8	36617-93J10	BRACKET, HARNESS	1	
9	09403-08417	CLAMP	1	
10	09403-20308	CLAMP	1	
11	09408-00008	CLIP (ID:20)	3	
12	01550-0612C	BOLT	1	
13	03542-05169	SCREW	2	
14	09408-00054	CLAMP	1	
15	36991-94L00	CLAMP, HARNESS	1	

DF25AT P01
DF30AT P01

FIG.322D

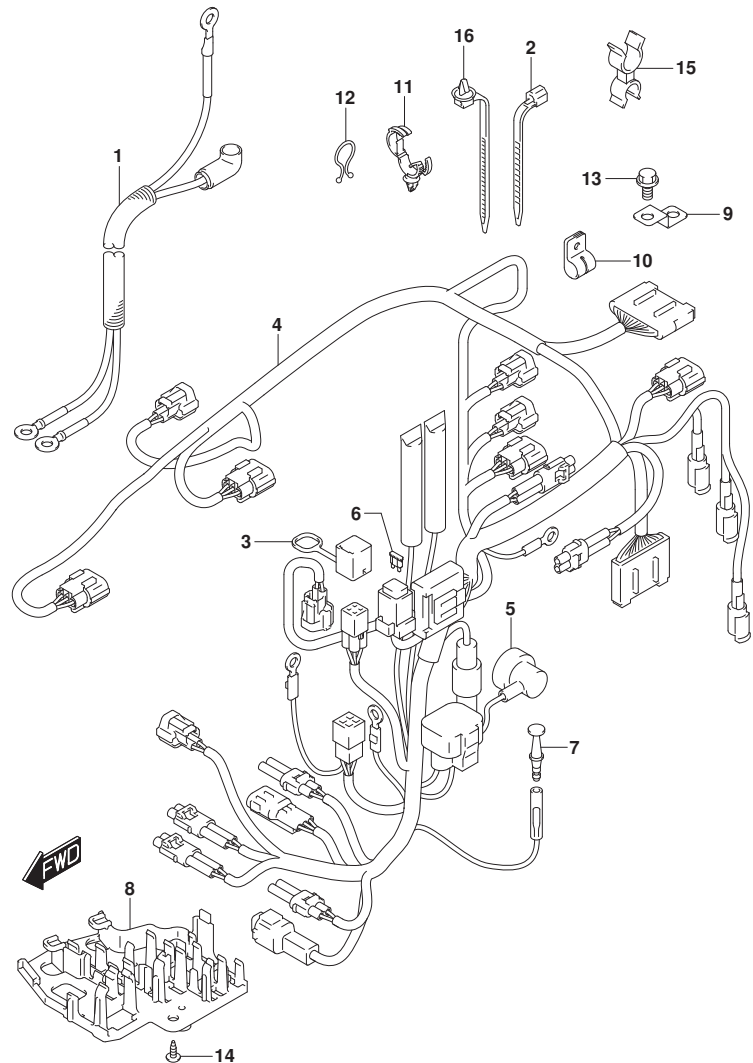

DF25A_30A_P01_022_322D
HARNESS

FIG.322D (1-F-6) HARNESS (DF25ATH,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	33810-94L01	CABLE, STARTER	1	
2	09407-18402	CLAMP (L:165)	1	
3	33634-94L00	CAP, SERVICE CONNECTOR	1	
4	36610-94L32	HARNESS ASSY, WIRING	1	
5	36618-43410	.CAP, OIL PRESSURE SWITCH	1	
6	09481-30501	.FUSE (30A)	1	
7	36615-96300	TERMINAL	1	
8	36616-94L00	HOLDER, CONNECTOR	1	
9	36617-93J10	BRACKET, HARNESS	1	
10	09403-08417	CLAMP	1	
11	09403-20308	CLAMP	1	
12	09408-00008	CLIP (ID:20)	3	
13	01550-0612C	BOLT	1	
14	03542-05169	SCREW	2	
15	09408-00054	CLAMP	1	
16	36991-94L00	CLAMP, HARNESS	1	

DF25ATH P01
DF30ATH P01

FIG.327A

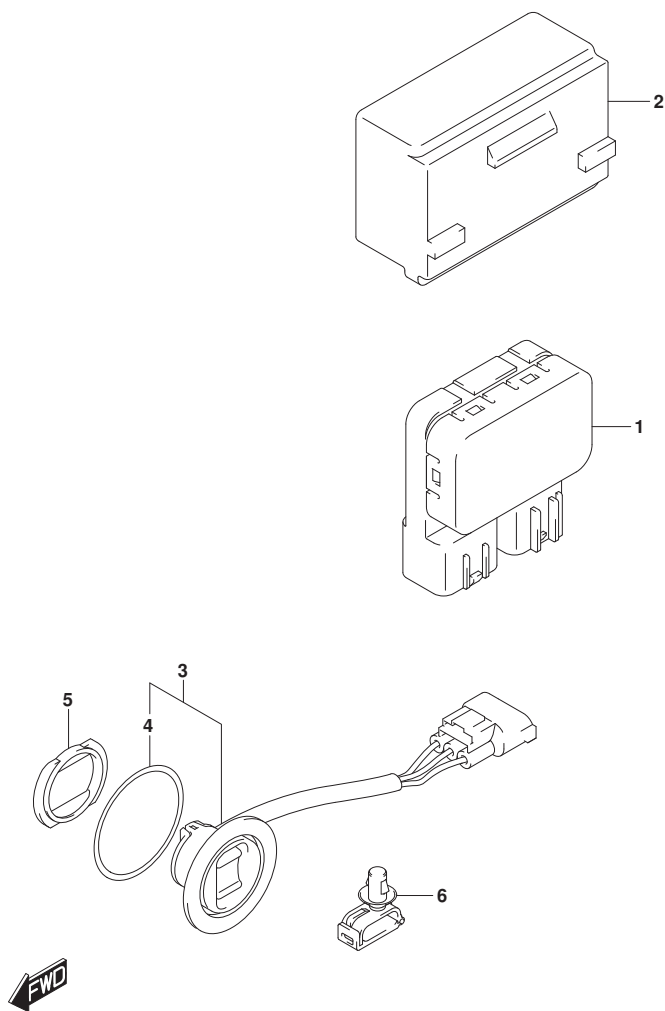


FIG.327A (1-F-7) PTT SWITCH (DF25AT,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	38410-93J21	RELAY ASSY, PTT	1	
2	38415-94L00	HOLDER, PTT RELAY	1	
3	37850-92J00	SWITCH ASSY, PTT	1	
4	37856-92J00	.TAPE, PTT SWITCH	1	
5	37857-92J01	BUSH, PTT SWITCH	1	
6	09403-07340	CLAMP	1	

DF25AT P01
DF30AT P01

FIG.327B

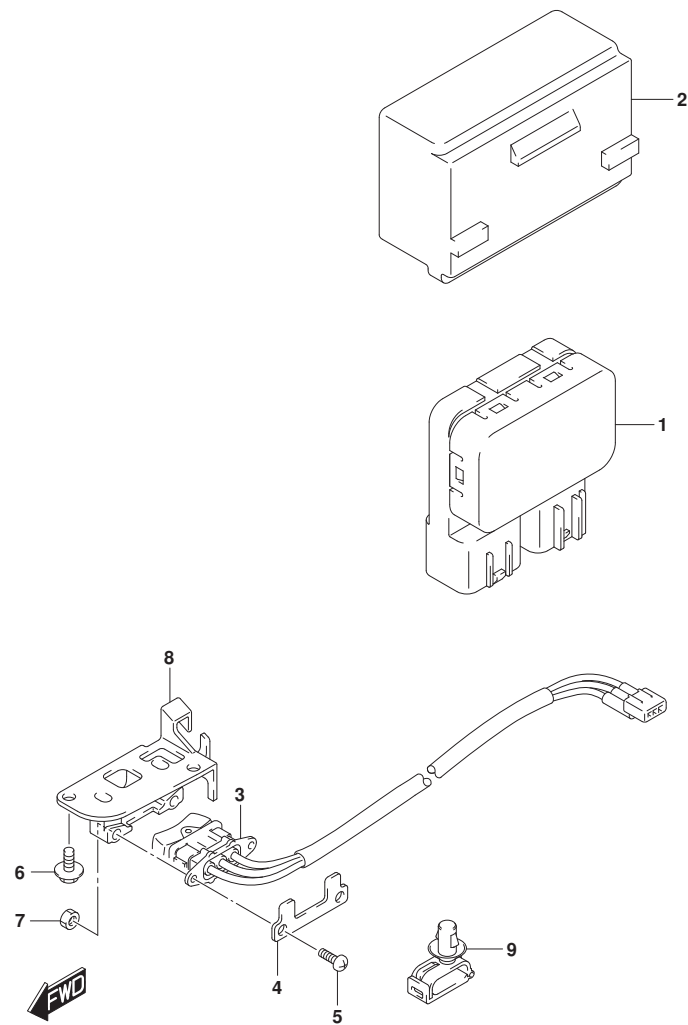


FIG.327B (1-F-8) PTT SWITCH (DF25ATH,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	38410-93J21	RELAY ASSY, PTT	1	
2	38415-94L00	HOLDER, PTT RELAY	1	
3	37850-94L01	SWITCH ASSY, PT	1	
4	37852-94JB0	BRACKET, PT SW	1	
5	09125-05046	SCREW (5X12)	2	
6	29103-93J00	BOLT (6X12)	2	
7	09140-05005	NUT (M5)	2	
8	37851-89L00	HOLDER, PT SW	1	
9	09403-07340	CLAMP	1	

DF25ATH P01
DF30ATH P01

FIG.334A

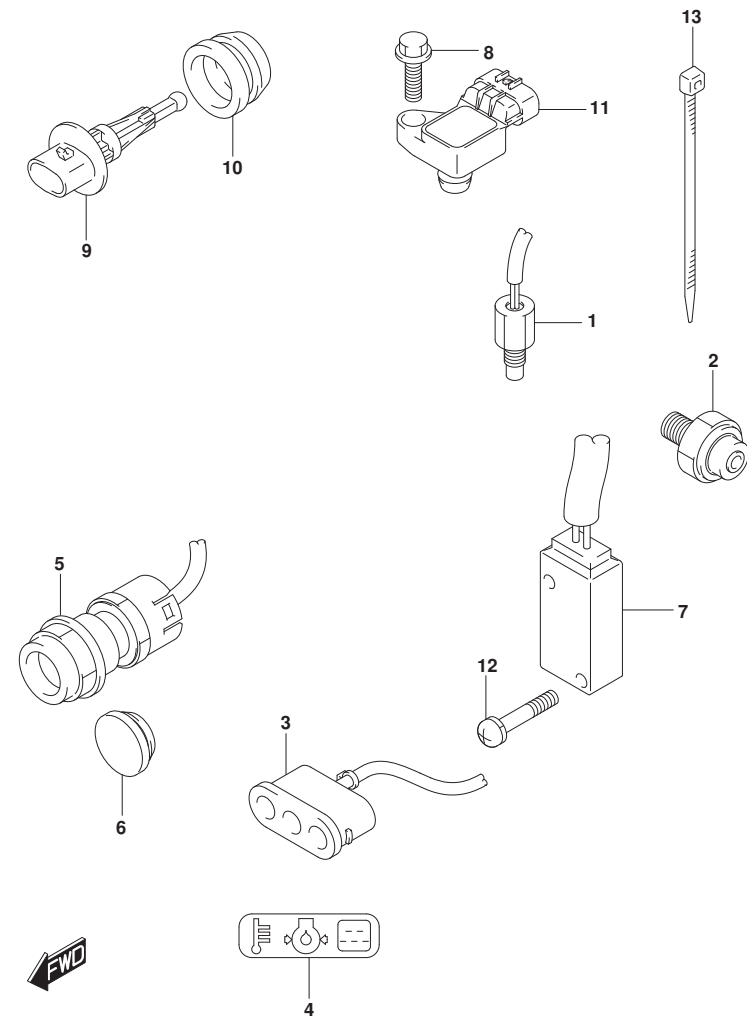


FIG.334A (1-F-9) SENSOR/SWITCH (DF25A,DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13640-32G20	SENSOR, ENGINE TEMP	1	
2	37820-89L00	SWITCH ASSY, OIL PRESSURE	1	
3	36360-94L00	INDICATOR, WARNING	1	
4	36367-89L00-YAY	LABEL, WARNING (BLACK)	1	
5	37161-89L02	SWITCH ASSY, STARTER MOTOR	1	W/ELECTRIC STARTER
6	37163-89L00	PLUG, STARTING SWITCH HOLE	1	W/MANUAL STARTER
7	37721-94L00	SWITCH ASSY, NEUTRAL	1	
8	01550-0620C	BOLT	1	
9	13650-52G00	SENSOR, INLET AIR TEMP	1	
10	13655-87J01	GROMMET, INLET AIR TEMP SNSR	1	
11	18590-58M00	SENSOR, MAP	1	
12	09137-03008	SCREW (3X18)	2	
13	09407-14407	CLAMP (L:145)	1	

DF25A P01
DF30AQ P01

FIG.334B

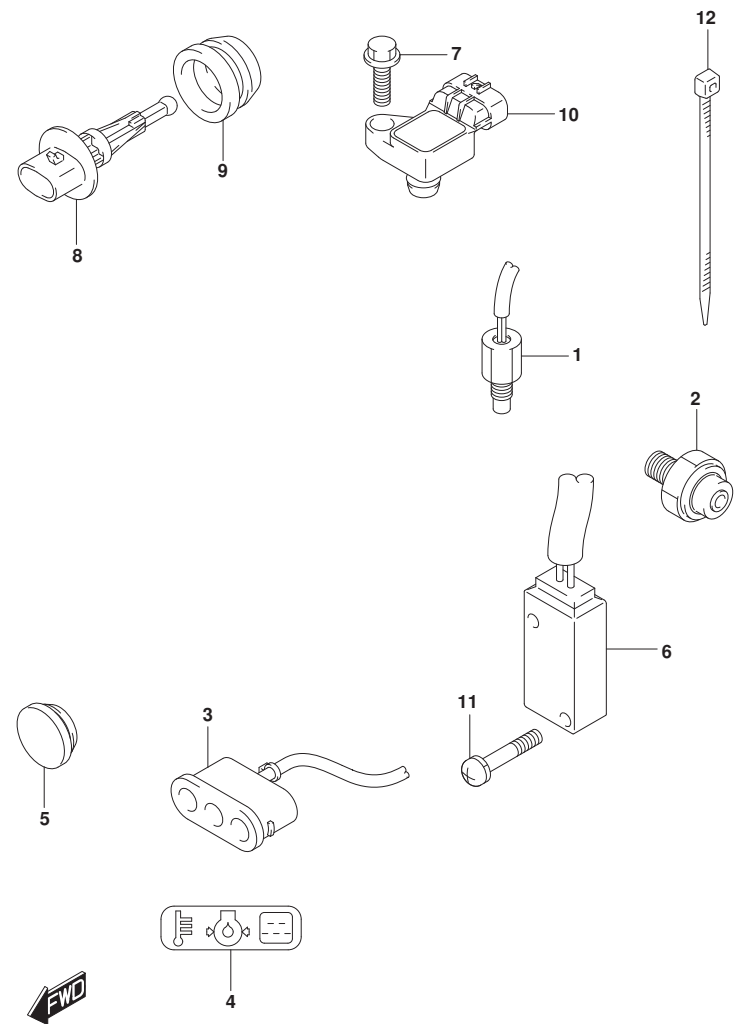


FIG.334B (1-F-10) SENSOR/SWITCH (DF25AR,DF30AR)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13640-32G20	SENSOR, ENGINE TEMP	1	
2	37820-89L00	SWITCH ASSY, OIL PRESSURE	1	
3	36360-94L00	INDICATOR, WARNING	1	
4	36367-89L00-YAY	LABEL, WARNING (BLACK)	1	
5	37163-89L00	PLUG, STARTING SWITCH HOLE	1	
6	37721-94L00	SWITCH ASSY, NEUTRAL	1	
7	01550-0620C	BOLT	1	
8	13650-52G00	SENSOR, INLET AIR TEMP	1	
9	13655-87J01	GROMMET, INLET AIR TEMP SNSR	1	
10	18590-58M00	SENSOR, MAP	1	
11	09137-03008	SCREW (3X18)	2	
12	09407-14407	CLAMP (L:145)	1	

DF25AR P01
DF30AR P01

FIG.334C

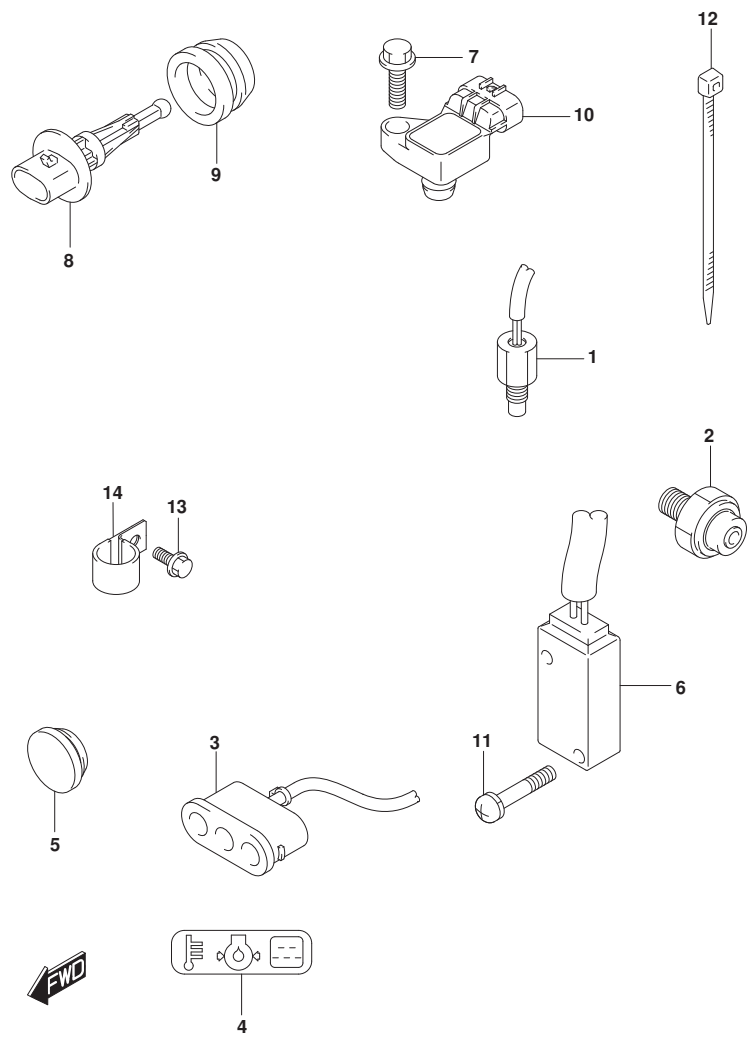


FIG.334C (1-F-11) SENSOR/SWITCH (DF25AT,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13640-32G20	SENSOR, ENGINE TEMP	1	
2	37820-89L00	SWITCH ASSY, OIL PRESSURE	1	
3	36360-94L00	INDICATOR, WARNING	1	
4-1	36367-89L00-YAY	LABEL, WARNING (BLACK)	1	
4-2	36367-89L00-Y5S	LABEL, WARNING (WHITE)	1	
5	37163-89L00	PLUG, STARTING SWITCH HOLE	1	
6	37721-94L00	SWITCH ASSY, NEUTRAL	1	
7	01550-0620C	BOLT	1	
8	13650-52G00	SENSOR, INLET AIR TEMP	1	
9	13655-87J01	GROMMET, INLET AIR TEMP SNSR	1	
10	18590-58M00	SENSOR, MAP	1	
11	09137-03008	SCREW (3X18)	2	
12	09407-14407	CLAMP (L:145)	1	
13	29103-93J00	BOLT (6X12)	1	
14	09403-13413	CLAMP	1	

DF25AT P01
DF30AT P01

FIG.334D

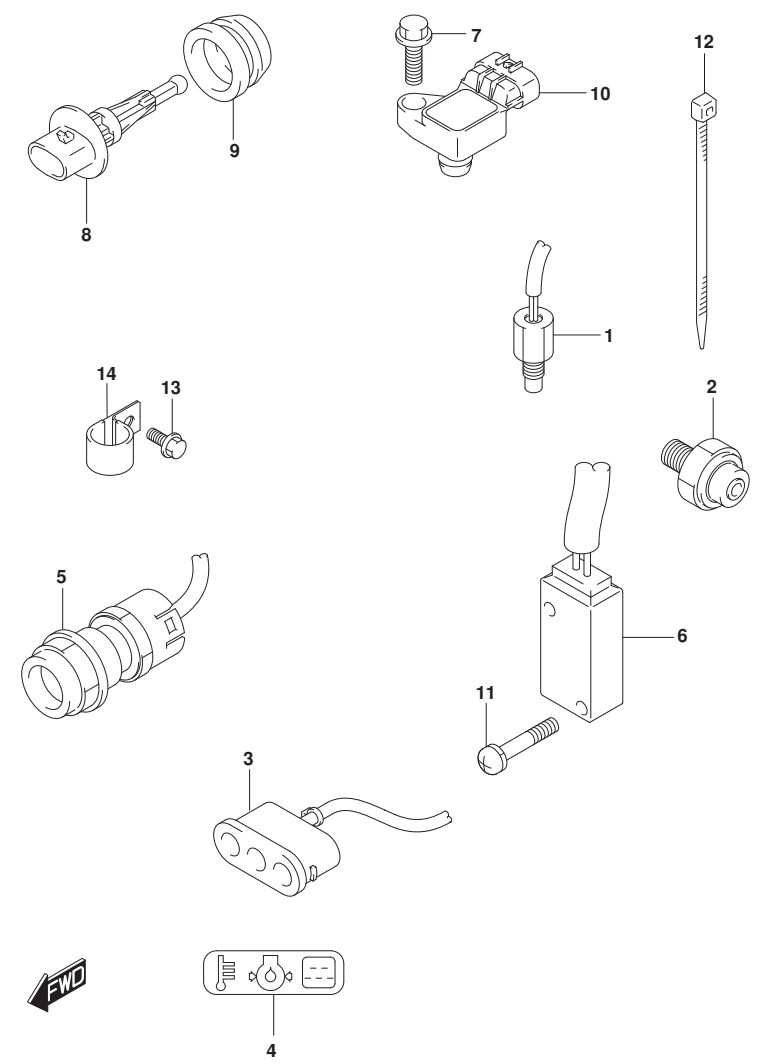


FIG.334D (1-F-12) SENSOR/SWITCH (DF25ATH,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13640-32G20	SENSOR, ENGINE TEMP	1	
2	37820-89L00	SWITCH ASSY, OIL PRESSURE	1	
3	36360-94L00	INDICATOR, WARNING	1	
4-1	36367-89L00-YAY	LABEL, WARNING (BLACK)	1	
4-2	36367-89L00-Y5S	LABEL, WARNING (WHITE)	1	
5	37161-89L02	SWITCH ASSY, STARTER MOTOR	1	
6	37721-94L00	SWITCH ASSY, NEUTRAL	1	
7	01550-0620C	BOLT	1	
8	13650-52G00	SENSOR, INLET AIR TEMP	1	
9	13655-87J01	GROMMET, INLET AIR TEMP SNSR	1	
10	18590-58M00	SENSOR, MAP	1	
11	09137-03008	SCREW (3X18)	2	
12	09407-14407	CLAMP (L:145)	1	
13	29103-93J00	BOLT (6X12)	1	
14	09403-13413	CLAMP	1	

DF25ATH P01
DF30ATH P01

FIG.334E


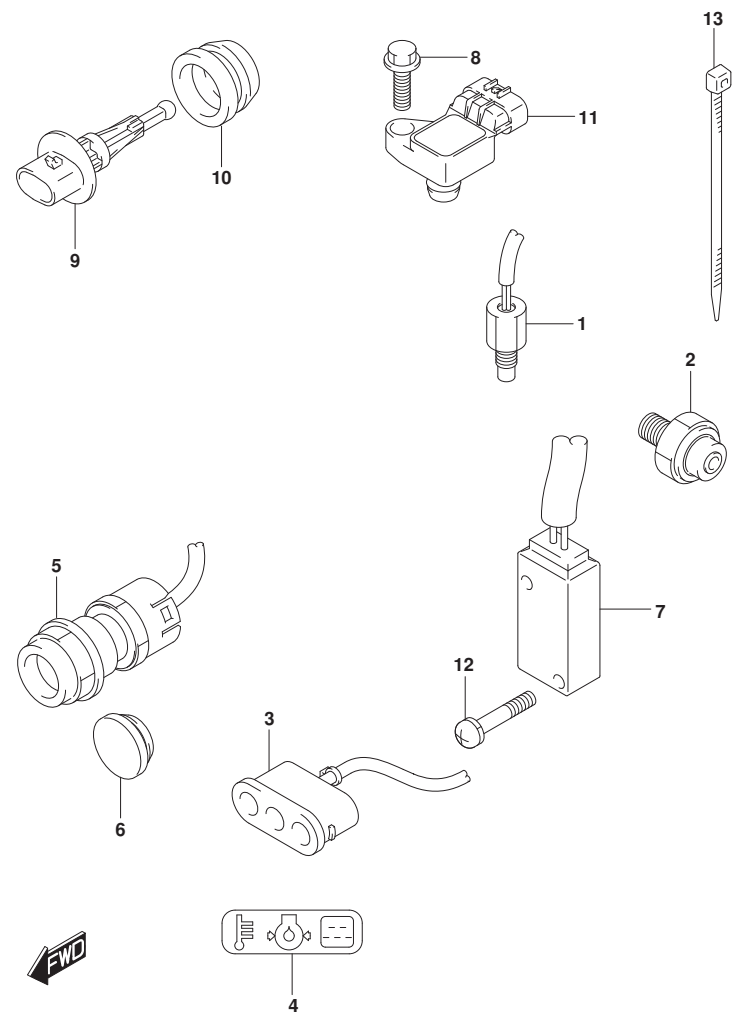


FIG.334E (1-F-13) SENSOR/SWITCH (DF30A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	13640-32G20	SENSOR, ENGINE TEMP	1	
2	37820-89L00	SWITCH ASSY, OIL PRESSURE	1	
3	36360-94L00	INDICATOR, WARNING	1	
4-1	36367-89L00-YAY	LABEL, WARNING (BLACK)	1	
4-2	36367-89L00-Y5S	LABEL, WARNING (WHITE)	1	
5	37161-89L02	SWITCH ASSY, STARTER MOTOR	1	W/ELECTRIC STARTER
6	37163-89L00	PLUG, STARTING SWITCH HOLE	1	W/MANUAL STARTER
7	37721-94L00	SWITCH ASSY, NEUTRAL	1	
8	01550-0620C	BOLT	1	
9	13650-52G00	SENSOR, INLET AIR TEMP	1	
10	13655-87J01	GROMMET, INLET AIR TEMP SNSR	1	
11	18590-58M00	SENSOR, MAP	1	
12	09137-03008	SCREW (3X18)	2	
13	09407-14407	CLAMP (L:145)	1	

DF30A P40

FIG.335A (1-F-14) CLAMP BRACKET (DF25A,DF25AR,DF30AR)

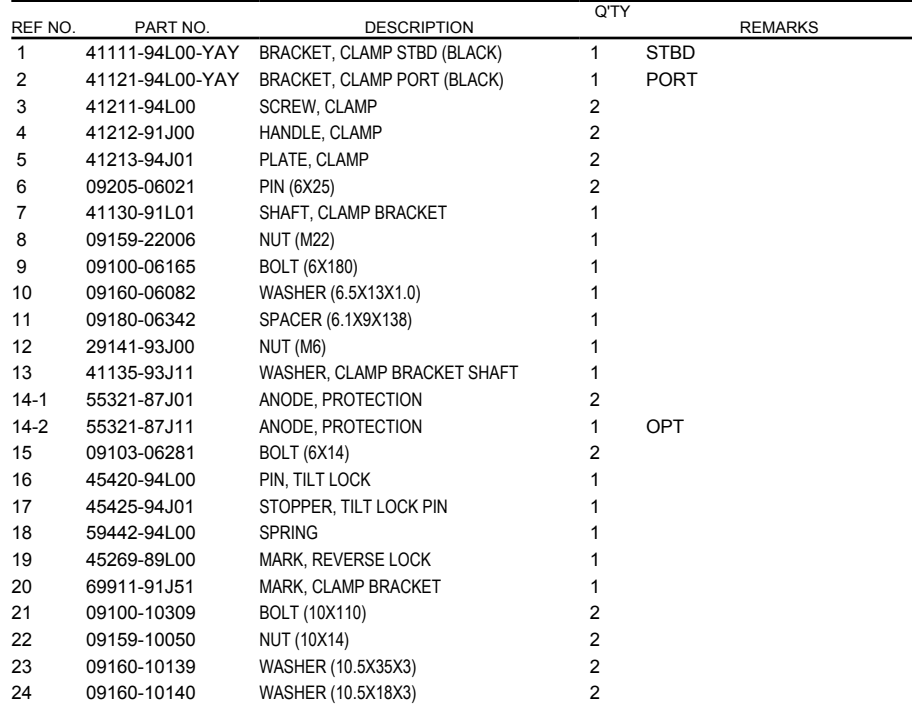

DF25A_30A_P01_022

FIG.335B


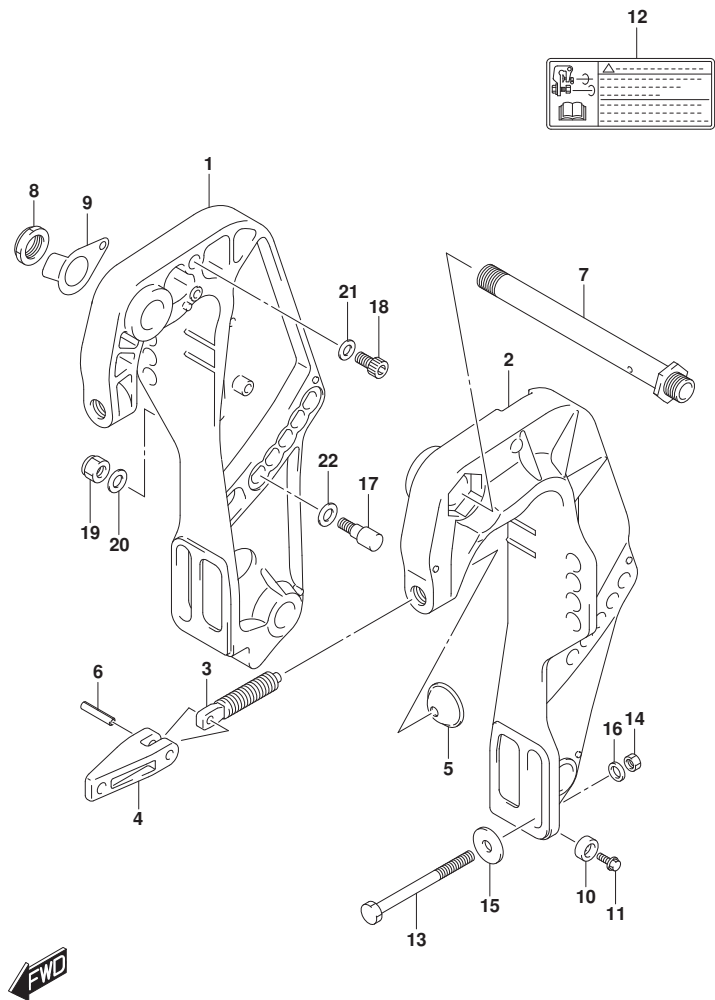


FIG.335B (1-G-2) CLAMP BRACKET (DF25AT,DF25ATH,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	41111-94LA0-YAY	BRACKET, CLAMP STBD (BLACK)	1	STBD
1-2	41111-94LA0-Y5S	BRACKET, CLAMP STBD (WHITE)	1	STBD
2-1	41121-94LA1-YAY	BRACKET, CLAMP PORT (BLACK)	1	PORT
2-2	41121-94LA1-Y5S	BRACKET, CLAMP PORT (WHITE)	1	PORT
3	41211-94LA0	SCREW, CLAMP	2	
4	41212-91J00	HANDLE, CLAMP	2	
5	41213-94J01	PLATE, CLAMP	2	
6	09205-06021	PIN (6X25)	2	
7	41130-94LA0	SHAFT, CLAMP BRACKET	1	
8	09159-22006	NUT (M22)	1	
9	41135-93J11	WASHER, CLAMP BRACKET SHAFT	1	
10-1	55321-87J01	ANODE, PROTECTION	2	
10-2	55321-87J11	ANODE, PROTECTION	1	OPT
11	09103-06281	BOLT (6X14)	2	
12	69911-91J51	MARK, CLAMP BRACKET	1	
13-1	09100-12093	BOLT (12X100)	4	020
13-2	09100-12132	BOLT (12X100)	4	021,022
14	09159-12014	NUT (12X17)	4	
15	09160-12128	WASHER (12.5X35X3)	4	
16	09160-12126	WASHER (12.5X22X3)	4	
17	45421-94LA0	PIN, TILT LOCK	2	
18	09106-10065	BOLT (10X20)	2	
19	09159-10050	NUT (10X14)	2	
20	09160-10082	WASHER (10.5X19X2.0)	2	
21	09160-10082	WASHER (10.5X19X2.0)	2	
22	09160-12066	WASHER (12.5X22X2.5)	2	

DF25AT P01
DF25ATH P01
DF30AT P01
DF30ATH P01

FIG.335C (1-G-3) CLAMP BRACKET (DF30A)

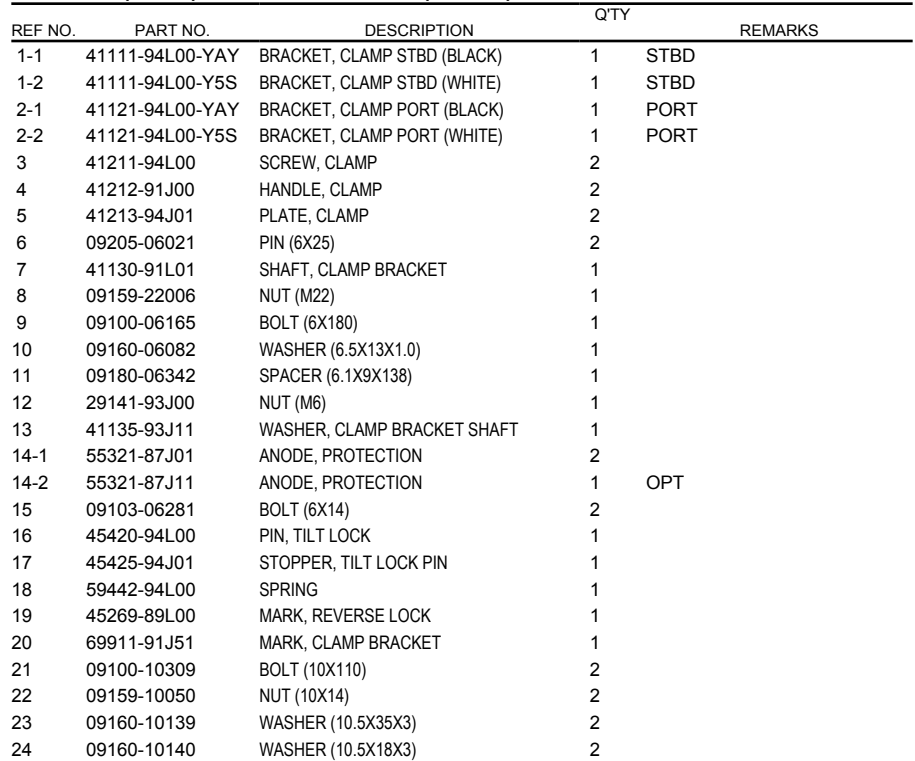

DF25A_30A_P01_022

FIG.335D

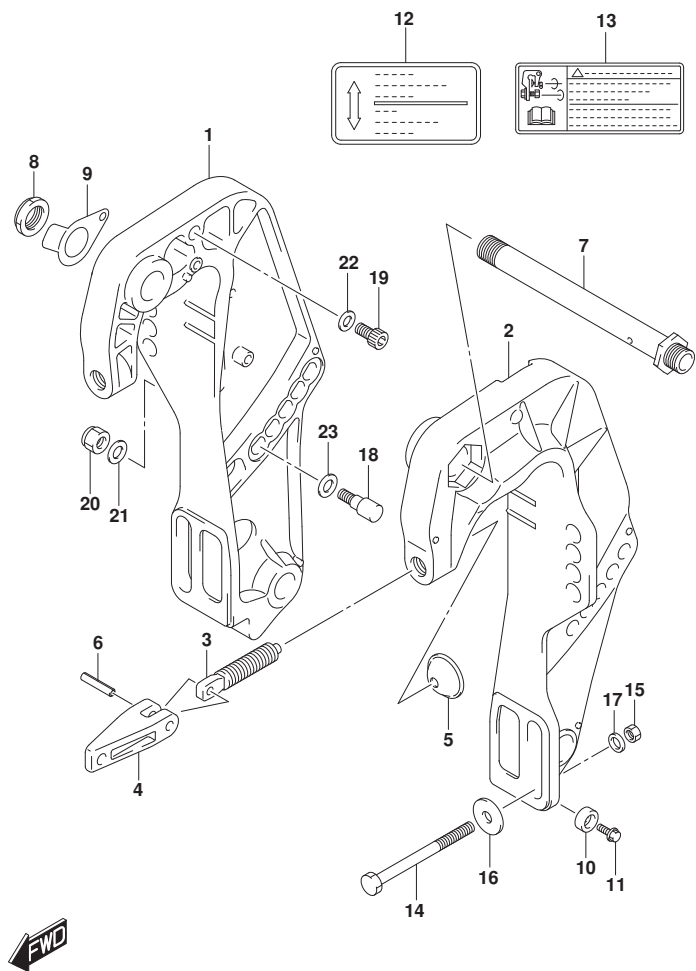


FIG.335D (1-G-4) CLAMP BRACKET (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	41111-94LA0-YAY	BRACKET, CLAMP STBD (BLACK)	1	STBD
2	41121-94LA1-YAY	BRACKET, CLAMP PORT (BLACK)	1	PORT
3	41211-94LA0	SCREW, CLAMP	2	
4	41212-91J00	HANDLE, CLAMP	2	
5	41213-94J01	PLATE, CLAMP	2	
6	09205-06021	PIN (6X25)	2	
7	41130-94LA0	SHAFT, CLAMP BRACKET	1	
8	09159-22006	NUT (M22)	1	
9	41135-93J11	WASHER, CLAMP BRACKET SHAFT	1	
10-1	55321-87J01	ANODE, PROTECTION	2	
10-2	55321-87J11	ANODE, PROTECTION	1	OPT
11	09103-06281	BOLT (6X14)	2	
12	43241-87J00	MARK, RELEASE LEVER	1	
13	69911-91J51	MARK, CLAMP BRACKET	1	
14-1	09100-12093	BOLT (12X100)	4	020
14-2	09100-12132	BOLT (12X100)	4	021,022
15	09159-12014	NUT (12X17)	4	
16	09160-12128	WASHER (12.5X35X3)	4	
17	09160-12126	WASHER (12.5X22X3)	4	
18	45421-94LA0	PIN, TILT LOCK	2	
19	09106-10065	BOLT (10X20)	2	
20	09159-10050	NUT (10X14)	2	
21	09160-10082	WASHER (10.5X19X2.0)	2	
22	09160-10082	WASHER (10.5X19X2.0)	2	
23	09160-12066	WASHER (12.5X22X2.5)	2	

DF30AQ P01

FIG.336A

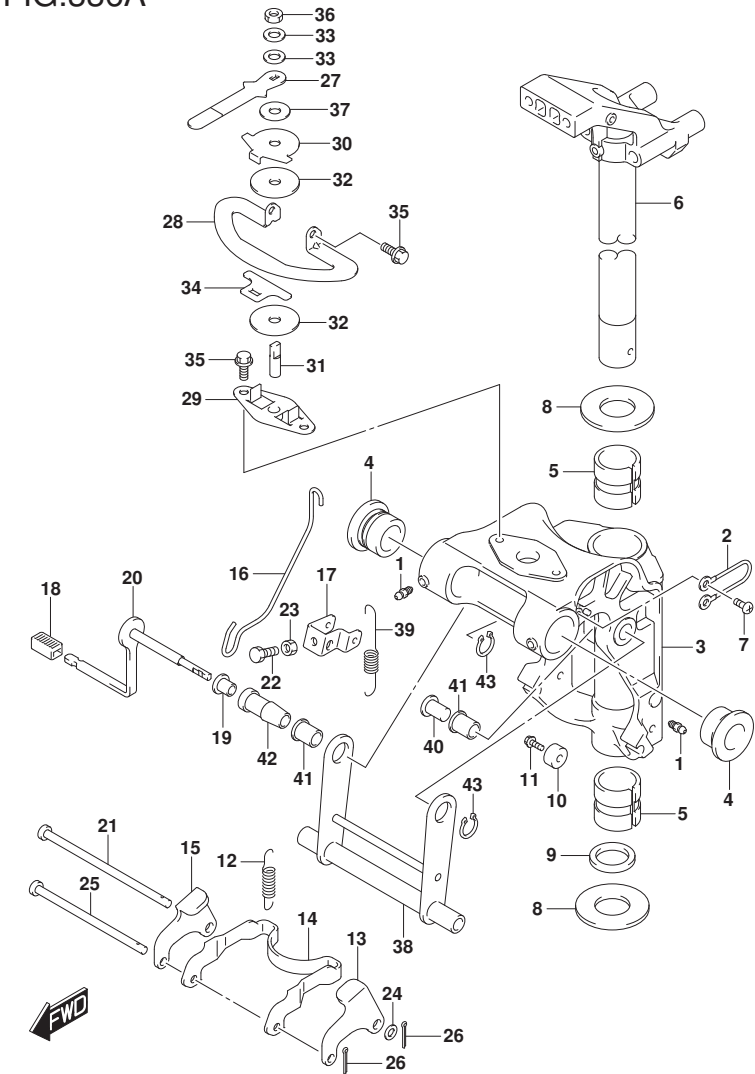


FIG.336A (1-G-5) SWIVEL BRACKET (DF25A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	22511-99011	NIPPLE, GREASE	4	
2	36894-87D00	LEAD (L:165)	1	
3-1	43111-94L00-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(S)
3-2	43111-94L10-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(L)
4	43211-87JL0	BUSH, SWIVEL BRACKET	2	
5	43711-94L00	BUSH, STEERING	2	
6-1	43750-94L00-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(S)
6-2	43750-94L10-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(L)
7	09125-06063	SCREW (6X10)	2	
8	09160-30057	WASHER (30.9X50X1.5)	2	
9	09282-30008	SEAL (30.6X43X5)	1	
10-1	55321-87J01	ANODE, PROTECTION	1	W/TRANSOM(L)
10-2	55321-87J11	ANODE, PROTECTION	1	OPT
11	09103-06281	BOLT (6X14)	1	W/TRANSOM(L)
12	45211-94L00	SPRING, REVERSE LOCK ARM	2	
13	45221-94L01	LINK, REVERSE LOCK ARM PORT	1	PORT
14	45231-94L00	ARM, REVERSE LOCK	1	
15	45241-94L01	LINK, REVERSE LOCK ARM STBD	1	STBD
16	45252-94L00	LINK, RELEASE LEVER	1	
17	45253-94L00	ARM, RELEASE	1	
18	45255-94L00	RUBBER, RELEASE LEVER	1	
19	45257-94L00	BUSH, RELEASE LEVER	1	
20	45260-94L00	LEVER, RELEASE	1	
21	59211-94L00	PIN, REVERSE LOCK ARM LINK	1	
22	09100-06113	BOLT (6X16)	1	
23	09140-06020	NUT	1	
24	09160-06082	WASHER (6.5X13X1.0)	1	
25	09200-06072	PIN (6X105.5)	1	
26	09204-01002	PIN	2	
27	43411-89L00	LEVER, STEERING ADJUSTER	1	
28	43415-94L01	PLATE, STRG ADJUSTER	1	
29	43420-89L00	PLATE, STRG ADJ FRICTION	1	
30	43425-89L00	PLATE, STRG ADJ UPPER	1	
31	43512-89L00	SHAFT, STRG ADJ THREAD	1	
32	43515-88L00	WASHER, STRG ADJ FRICTION PLATE	2	

FIG.336A

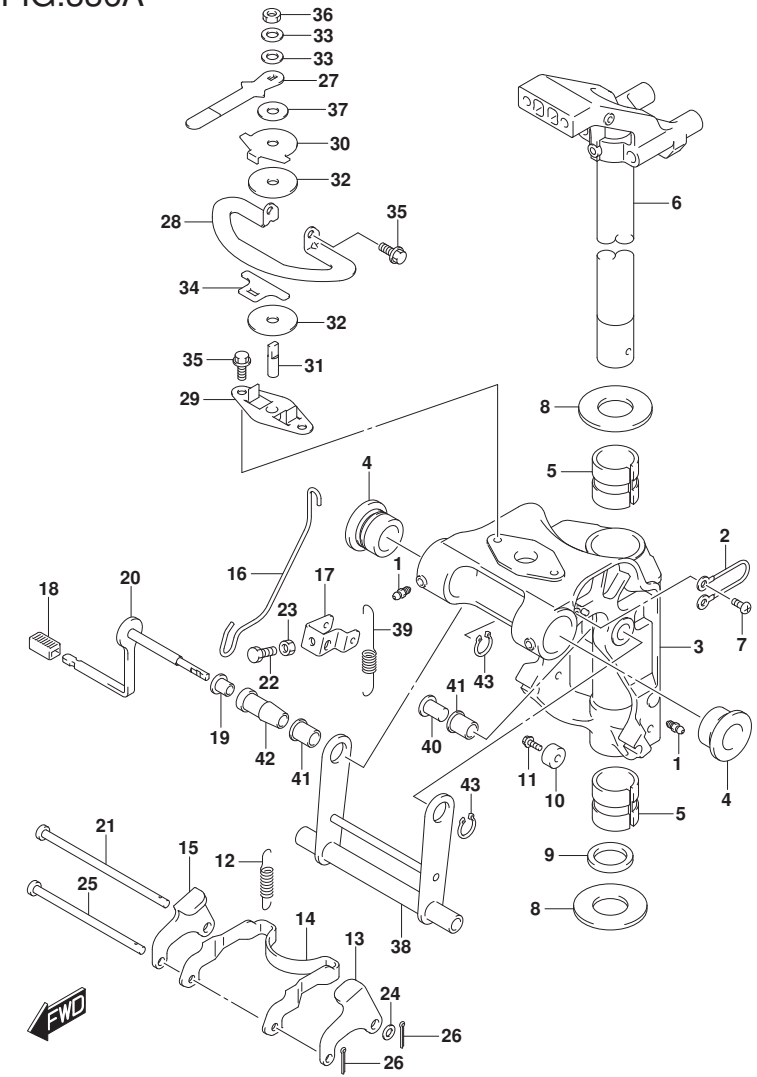


FIG.336A (1-G-6) SWIVEL BRACKET (DF25A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
33	43516-89J00	WASHER, STEERING ADJUSTER	2	
34	43517-89L00	SPACER, STEERING ADJUSTER	1	
35	09116-06225	BOLT (6X16)	4	
36	09159-08L02	NUT	1	
37	09161-08019	WASHER (8.2X18X1.2)	1	
38	45710-94L00	ARM, SHALLOW WATER DRIVE	1	
39	45722-94L00	SPRING, SHALLOW WATER DRIVE	1	
		ARM		
40	45741-94L00	PIN, SHALLOW DRIVE WATER ARM	1	
41	45751-94L00	BUSH, SHALLOW WATER DRIVE ARM	2	
42	45761-94L00	SPACER, SHALLOW WATER DRIVE	1	
		ARM		
43	09380-12002	SNAP RING	2	

DF25A P01

FIG.336B


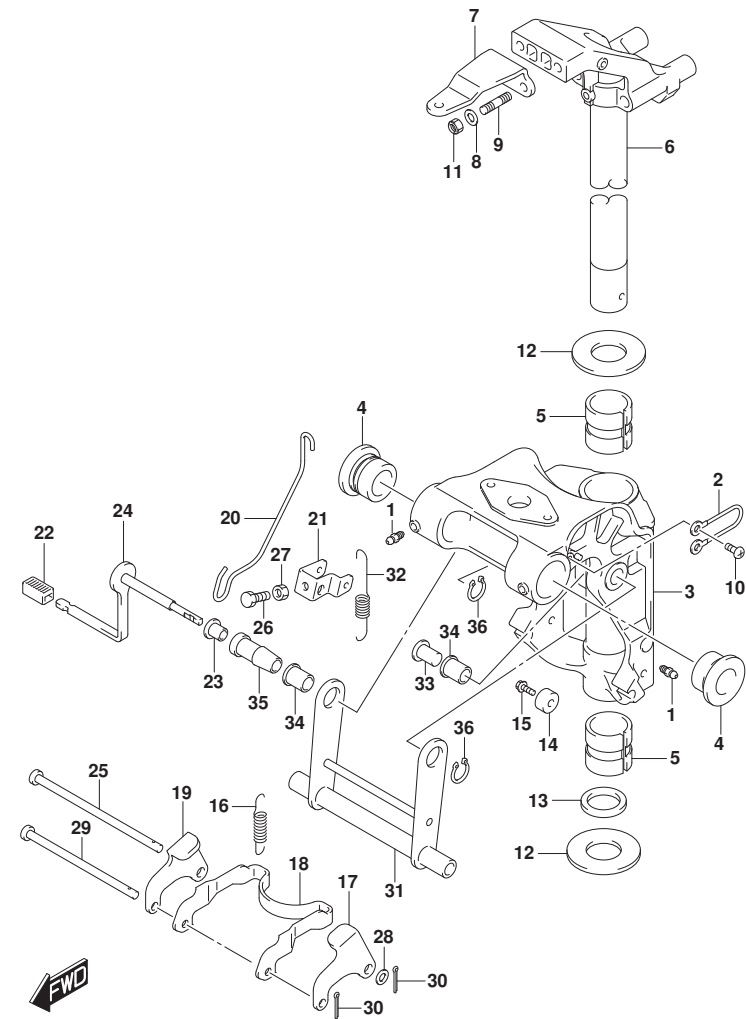


FIG.336B (1-G-7) SWIVEL BRACKET (DF25AR,DF30AR)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	22511-99011	NIPPLE, GREASE	4	
2	36894-87D00	LEAD (L:165)	1	
3-1	43111-94L00-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(S)
3-2	43111-94L10-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(L)
4	43211-87JL0	BUSH, SWIVEL BRACKET	2	
5	43711-94L00	BUSH, STEERING	2	
6-1	43750-94L00-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(S)
6-2	43750-94L10-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(L)
7	43755-94L00	ATTACHMENT, STEERING BRACKET	1	
8	09160-08082	WASHER (8.5X16X1.2)	2	
9	09108-08286	STUD BOLT	2	
10	09125-06063	SCREW (6X10)	2	
11	09159-08059	NUT (M8)	2	
12	09160-30057	WASHER (30.9X50X1.5)	2	
13	09282-30008	SEAL (30.6X43X5)	1	
14-1	55321-87J01	ANODE, PROTECTION	1	W/TRANSOM(L)
14-2	55321-87J11	ANODE, PROTECTION	1	OPT
15	09103-06281	BOLT (6X14)	1	W/TRANSOM(L)
16	45211-94L00	SPRING, REVERSE LOCK ARM	2	
17	45221-94L01	LINK, REVERSE LOCK ARM PORT	1	PORT
18	45231-94L00	ARM, REVERSE LOCK	1	
19	45241-94L01	LINK, REVERSE LOCK ARM STBD	1	STBD
20	45252-94L00	LINK, RELEASE LEVER	1	
21	45253-94L00	ARM, RELEASE	1	
22	45255-94L00	RUBBER, RELEASE LEVER	1	
23	45257-94L00	BUSH, RELEASE LEVER	1	
24	45260-94L00	LEVER, RELEASE	1	
25	59211-94L00	PIN, REVERSE LOCK ARM LINK	1	
26	09100-06113	BOLT (6X16)	1	
27	09140-06020	NUT	1	
28	09160-06082	WASHER (6.5X13X1.0)	1	
29	09200-06072	PIN (6X105.5)	1	
30	09204-01002	PIN	2	
31	45710-94L00	ARM, SHALLOW WATER DRIVE	1	
32	45722-94L00	SPRING, SHALLOW WATER DRIVE ARM	1	

FIG.336B (1-G-8) SWIVEL BRACKET (DF25AR,DF30AR)

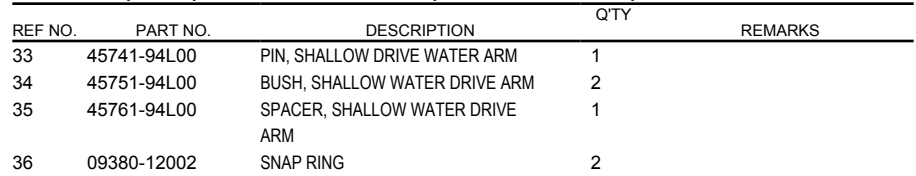

DF25A_30A_P01_022

FIG.336C

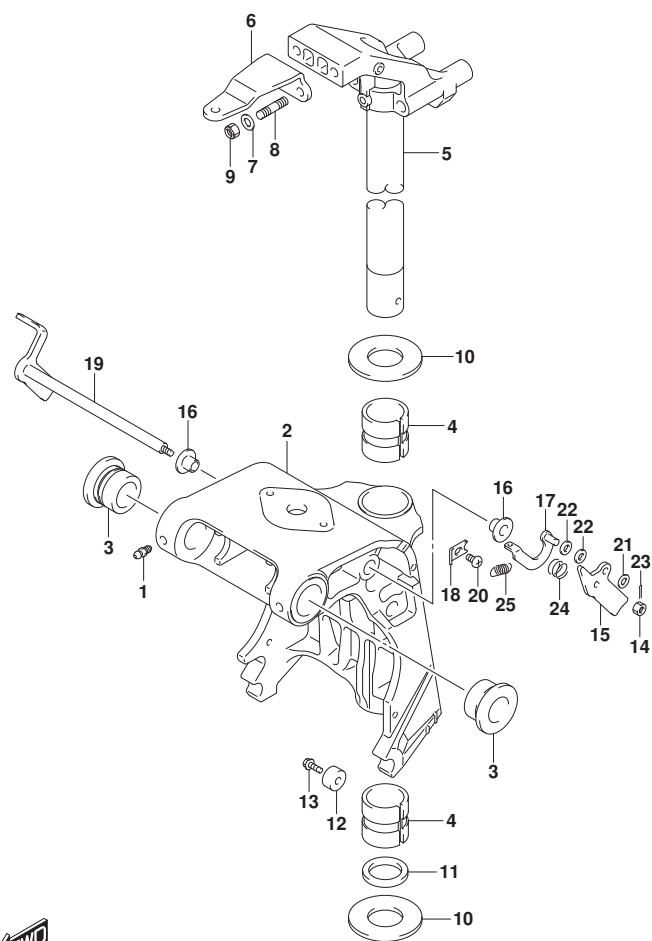


FIG.336C (1-G-9) SWIVEL BRACKET (DF25AT,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	22511-99011	NIPPLE, GREASE	4	
2-1	43111-94LA0-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(S)
2-2	43111-94LA0-Y5S	BRACKET, SWIVEL (WHITE)	1	W/TRANSOM(S)
2-3	43111-94LB0-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(L)
2-4	43111-94LB0-Y5S	BRACKET, SWIVEL (WHITE)	1	W/TRANSOM(L)
3	43211-87JL0	BUSH, SWIVEL BRACKET	2	
4	43711-94L00	BUSH, STEERING	2	
5-1	43750-94L00-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(S)
5-2	43750-94L00-Y5S	BRACKET, STEERING (WHITE)	1	W/TRANSOM(S)
5-3	43750-94L10-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(L)
5-4	43750-94L10-Y5S	BRACKET, STEERING (WHITE)	1	W/TRANSOM(L)
6	43755-94L00	ATTACHMENT, STEERING BRACKET	1	
7	09160-08082	WASHER (8.5X16X1.2)	2	
8	09108-08286	STUD BOLT	2	
9	09159-08059	NUT (M8)	2	
10	09160-30057	WASHER (30.9X50X1.5)	2	
11	09282-30008	SEAL (30.6X43X5)	1	
12-1	55321-87J01	ANODE, PROTECTION	1	
12-2	55321-87J11	ANODE, PROTECTION	1	OPT
13	09103-06281	BOLT (6X14)	1	
14	29141-93J00	NUT (M6)	1	
15	41221-94LA0	LEVER, TILT LOCK PORT	1	PORT
16	41224-94LA0	BUSH, TILT STOPPER ROD	2	
17	41230-94LA0	LINK, TILT LOCK LEVER	1	
18	41233-94LA0	BRACKET, TILT LOCK SPRING	1	
19	41280-94LA0	LEVER, TILT LOCK	1	
20	09125-06063	SCREW (6X10)	1	
21	09160-06082	WASHER (6.5X13X1.0)	1	
22	09160-06170	WASHER (6.5X13X2)	2	
23	09204-01006	PIN	1	
24	09440-13057	SPRING	1	

FIG.336C

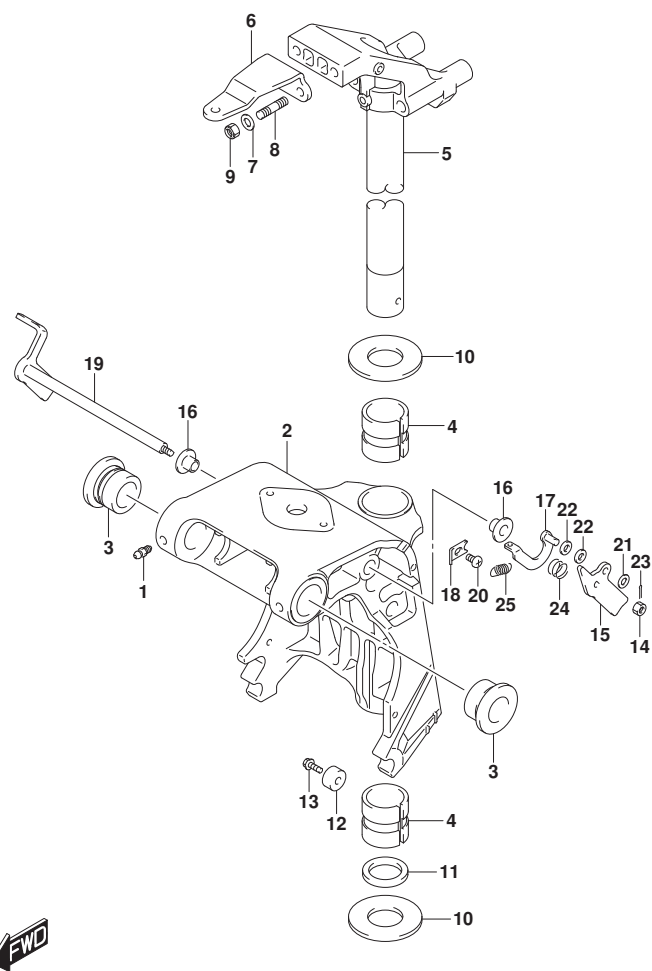


FIG.336C (1-G-10) SWIVEL BRACKET (DF25AT,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
25	09443-10043	SPRING	1	

DF25AT P01
DF30AT P01

FIG.336D

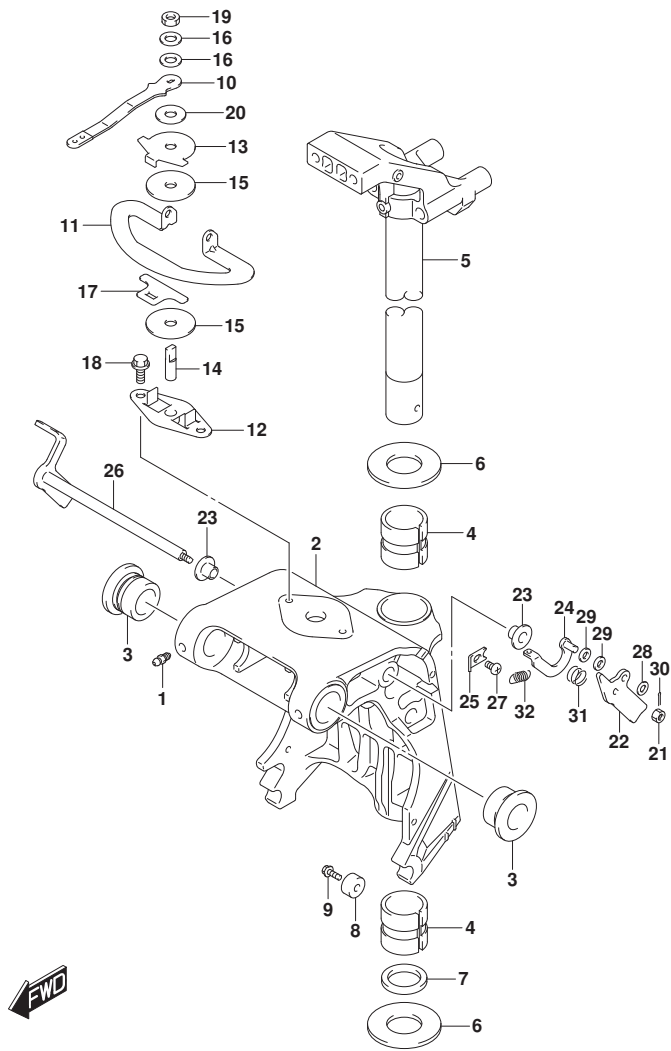


FIG.336D (1-G-11) SWIVEL BRACKET (DF25ATH,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	22511-99011	NIPPLE, GREASE	4	
2-1	43111-94LA0-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(S)
2-2	43111-94LA0-Y5S	BRACKET, SWIVEL (WHITE)	1	W/TRANSOM(S)
2-3	43111-94LB0-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(L)
2-4	43111-94LB0-Y5S	BRACKET, SWIVEL (WHITE)	1	W/TRANSOM(L)
3	43211-87JL0	BUSH, SWIVEL BRACKET	2	
4	43711-94L00	BUSH, STEERING	2	
5-1	43750-94L00-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(S)
5-2	43750-94L00-Y5S	BRACKET, STEERING (WHITE)	1	W/TRANSOM(S)
5-3	43750-94L10-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(L)
5-4	43750-94L10-Y5S	BRACKET, STEERING (WHITE)	1	W/TRANSOM(L)
6	09160-30057	WASHER (30.9X50X1.5)	2	
7	09282-30008	SEAL (30.6X43X5)	1	
8-1	55321-87J01	ANODE, PROTECTION	1	
8-2	55321-87J11	ANODE, PROTECTION	1	OPT
9	09103-06281	BOLT (6X14)	1	
10	43411-89LA0	LEVER, STEERING ADJUSTER	1	
11	43415-94L01	PLATE, STRG ADJUSTER	1	
12	43420-89L00	PLATE, STRG ADJ FRICTION	1	
13	43425-89L00	PLATE, STRG ADJ UPPER	1	
14	43512-89L00	SHAFT, STRG ADJ THREAD	1	
15	43515-88L00	WASHER, STRG ADJ FRICTION	2	
16	43516-89J00	WASHER, STEERING ADJUSTER	2	
17	43517-89L00	SPACER, STEERING ADJUSTER	1	
18	09116-06225	BOLT (6X16)	4	
19	09159-08L02	NUT	1	
20	09161-08019	WASHER (8.2X18X1.2)	1	
21	29141-93J00	NUT (M6)	1	
22	41221-94LA0	LEVER, TILT LOCK PORT	1	PORT
23	41224-94LA0	BUSH, TILT STOPPER ROD	2	
24	41230-94LA0	LINK, TILT LOCK LEVER	1	
25	41233-94LA0	BRACKET, TILT LOCK SPRING	1	
26	41280-94LA0	LEVER, TILT LOCK	1	
27	09125-06063	SCREW (6X10)	1	
28	09160-06082	WASHER (6.5X13X1.0)	1	

FIG.336D

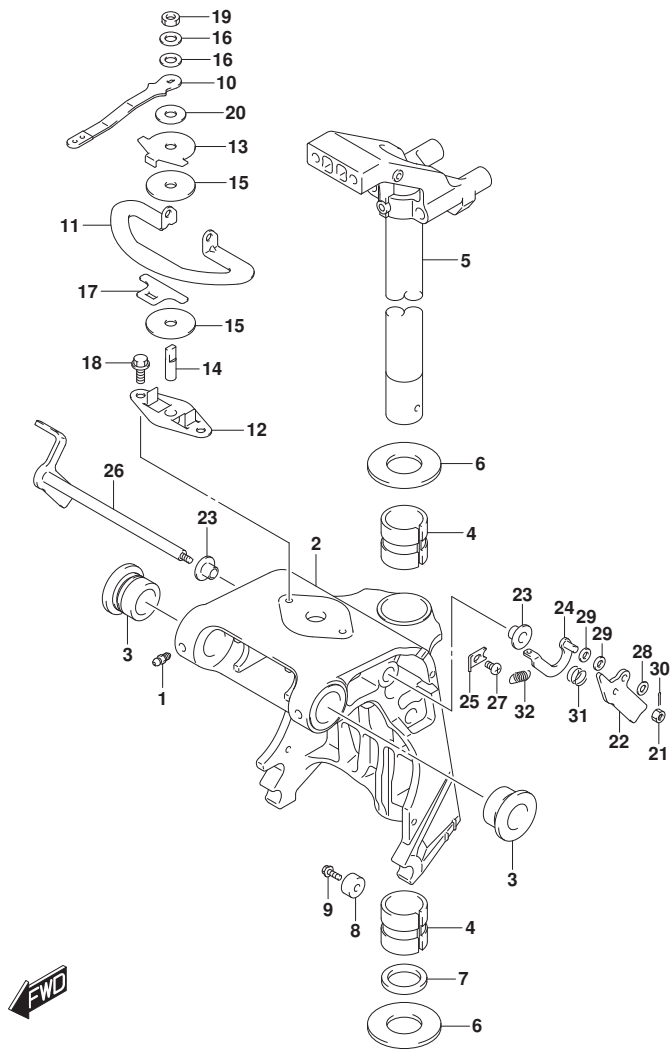


FIG.336D (1-G-12) SWIVEL BRACKET (DF25ATH,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
29	09160-06170	WASHER (6.5X13X2)	2	
30	09204-01006	PIN	1	
31	09440-13057	SPRING	1	
32	09443-10043	SPRING	1	

DF25ATH P01
DF30ATH P01

FIG.336E

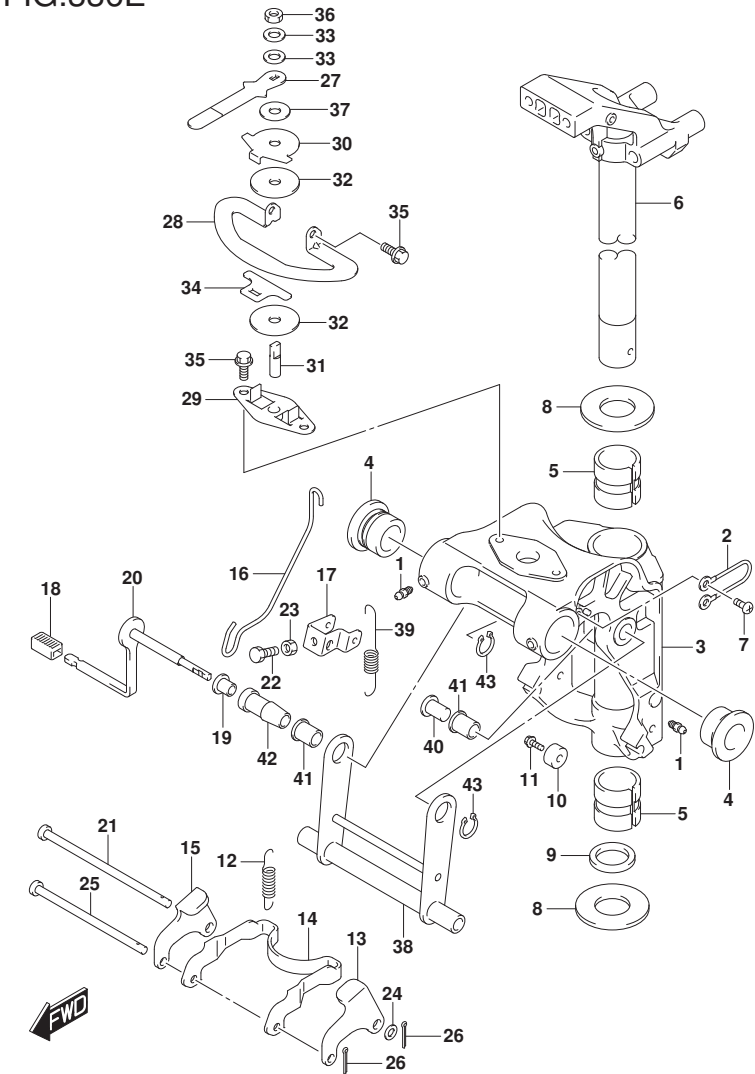


FIG.336E (1-G-13) SWIVEL BRACKET (DF30A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	22511-99011	NIPPLE, GREASE	4	
2	36894-87D00	LEAD (L:165)	1	
3-1	43111-94L00-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(S)
3-2	43111-94L00-Y5S	BRACKET, SWIVEL (WHITE)	1	W/TRANSOM(S)
3-3	43111-94L10-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(L)
3-4	43111-94L10-Y5S	BRACKET, SWIVEL (WHITE)	1	W/TRANSOM(L)
4	43211-87JL0	BUSH, SWIVEL BRACKET	2	
5	43711-94L00	BUSH, STEERING	2	
6-1	43750-94L00-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(S)
6-2	43750-94L00-Y5S	BRACKET, STEERING (WHITE)	1	W/TRANSOM(S)
6-3	43750-94L10-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(L)
6-4	43750-94L10-Y5S	BRACKET, STEERING (WHITE)	1	W/TRANSOM(L)
7	09125-06063	SCREW (6X10)	2	
8	09160-30057	WASHER (30.9X50X1.5)	2	
9	09282-30008	SEAL (30.6X43X5)	1	
10-1	55321-87J01	ANODE, PROTECTION	1	W/TRANSOM(L)
10-2	55321-87J11	ANODE, PROTECTION	1	OPT
11	09103-06281	BOLT (6X14)	1	W/TRANSOM(L)
12	45211-94L00	SPRING, REVERSE LOCK ARM	2	
13	45221-94L01	LINK, REVERSE LOCK ARM PORT	1	PORT
14	45231-94L00	ARM, REVERSE LOCK	1	
15	45241-94L01	LINK, REVERSE LOCK ARM STBD	1	STBD
16	45252-94L00	LINK, RELEASE LEVER	1	
17	45253-94L00	ARM, RELEASE	1	
18	45255-94L00	RUBBER, RELEASE LEVER	1	
19	45257-94L00	BUSH, RELEASE LEVER	1	
20	45260-94L00	LEVER, RELEASE	1	
21	59211-94L00	PIN, REVERSE LOCK ARM LINK	1	
22	09100-06113	BOLT (6X16)	1	
23	09140-06020	NUT	1	
24	09160-06082	WASHER (6.5X13X1.0)	1	
25	09200-06072	PIN (6X105.5)	1	
26	09204-01002	PIN	2	
27	43411-89L00	LEVER, STEERING ADJUSTER	1	
28	43415-94L01	PLATE, STRG ADJUSTER	1	
29	43420-89L00	PLATE, STRG ADJ FRICTION	1	

FIG.336E

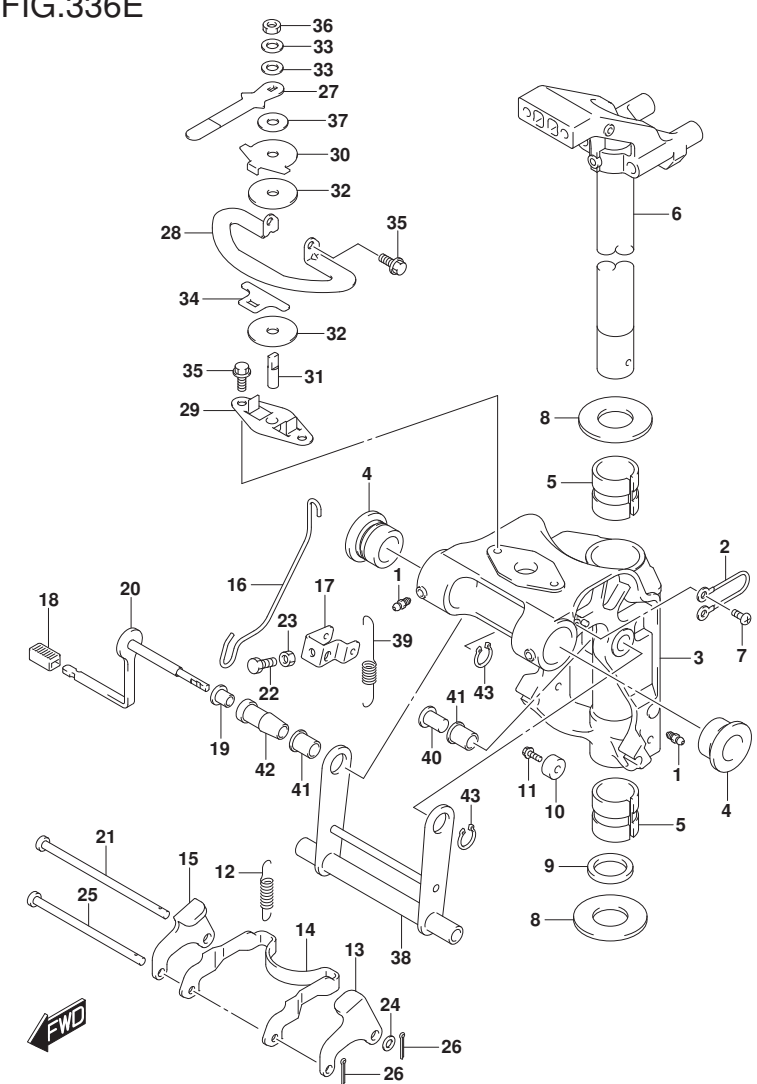


FIG.336E (1-G-14) SWIVEL BRACKET (DF30A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
30	43425-89L00	PLATE, STRG ADJ UPPER	1	
31	43512-89L00	SHAFT, STRG ADJ THREAD	1	
32	43515-88L00	WASHER, STRG ADJ FRICTION PLATE	2	
33	43516-89J00	WASHER, STEERING ADJUSTER	2	
34	43517-89L00	SPACER, STEERING ADJUSTER	1	
35	09116-06225	BOLT (6X16)	4	
36	09159-08L02	NUT	1	
37	09161-08019	WASHER (8.2X18X1.2)	1	
38	45710-94L00	ARM, SHALLOW WATER DRIVE	1	
39	45722-94L00	SPRING, SHALLOW WATER DRIVE ARM	1	
40	45741-94L00	PIN, SHALLOW DRIVE WATER ARM	1	
41	45751-94L00	BUSH, SHALLOW WATER DRIVE ARM	2	
42	45761-94L00	SPACER, SHALLOW WATER DRIVE ARM	1	
43	09380-12002	SNAP RING	2	

DF30A P40

FIG.336F

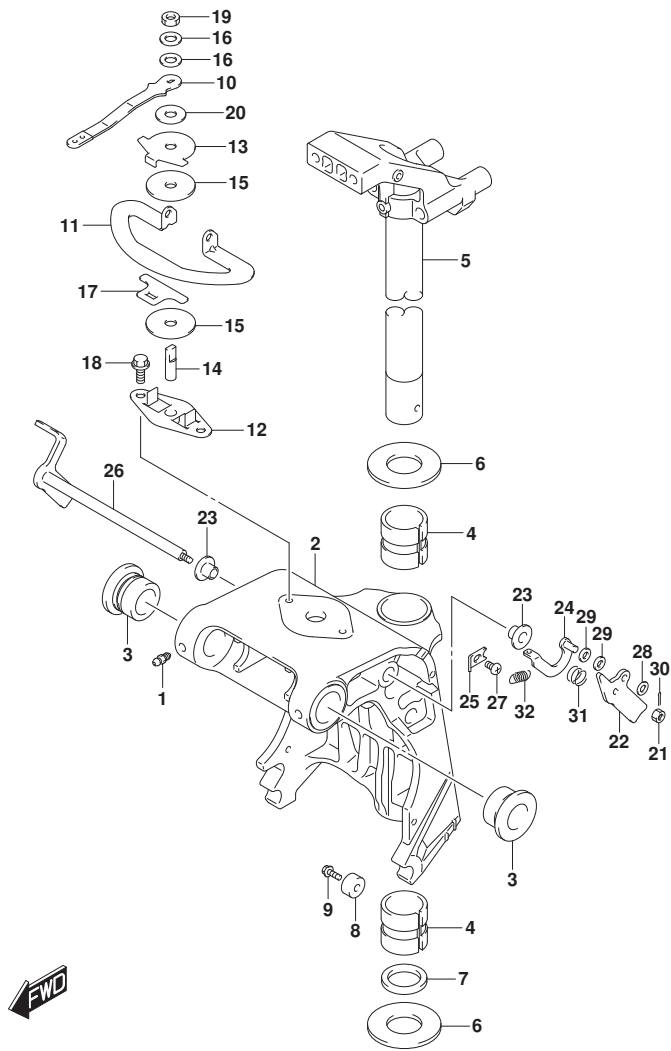


FIG.336F (1-H-2) SWIVEL BRACKET (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	22511-99011	NIPPLE, GREASE	4	
2-1	43111-94LA0-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(S)
2-2	43111-94LB0-YAY	BRACKET, SWIVEL (BLACK)	1	W/TRANSOM(L),W/TRANSOM(X)
3	43211-87JL0	BUSH, SWIVEL BRACKET	2	
4	43711-94L00	BUSH, STEERING	2	
5-1	43750-94L00-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(S)
5-2	43750-94L10-YAY	BRACKET, STEERING (BLACK)	1	W/TRANSOM(L),W/TRANSOM(X)
6	09160-30057	WASHER (30.9X50X1.5)	2	
7	09282-30008	SEAL (30.6X43X5)	1	
8-1	55321-87J01	ANODE, PROTECTION	1	
8-2	55321-87J11	ANODE, PROTECTION	1	OPT
9	09103-06281	BOLT (6X14)	1	
10	43411-89LA0	LEVER, STEERING ADJUSTER	1	
11	43415-94L01	PLATE, STRG ADJUSTER	1	
12	43420-89L00	PLATE, STRG ADJ FRICTION	1	
13	43425-89L00	PLATE, STRG ADJ UPPER	1	
14	43512-89L00	SHAFT, STRG ADJ THREAD	1	
15	43515-88L00	WASHER, STRG ADJ FRICTION PLATE	2	
16	43516-89J00	WASHER, STEERING ADJUSTER	2	
17	43517-89L00	SPACER, STEERING ADJUSTER	1	
18	09116-06225	BOLT (6X16)	4	
19	09159-08L02	NUT	1	
20	09161-08019	WASHER (8.2X18X1.2)	1	
21	29141-93J00	NUT (M6)	1	
22	41221-94LA0	LEVER, TILT LOCK PORT	1	PORT
23	41224-94LA0	BUSH, TILT STOPPER ROD	2	
24	41230-94LA0	LINK, TILT LOCK LEVER	1	
25	41233-94LA0	BRACKET, TILT LOCK SPRING	1	
26	41280-94LA0	LEVER, TILT LOCK	1	
27	09125-06063	SCREW (6X10)	1	
28	09160-06082	WASHER (6.5X13X1.0)	1	
29	09160-06170	WASHER (6.5X13X2)	2	
30	09204-01006	PIN	1	
31	09440-13057	SPRING	1	

FIG.336F


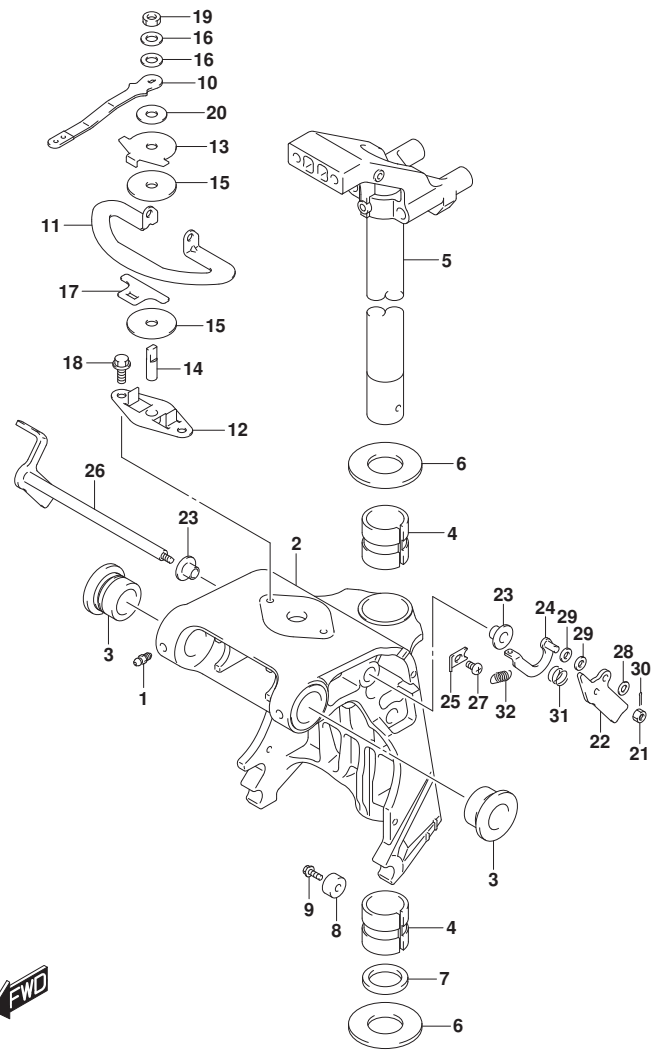


FIG.336F (1-H-3) SWIVEL BRACKET (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
32	09443-10043	SPRING	1	

DF30AQ P01

FIG.338A

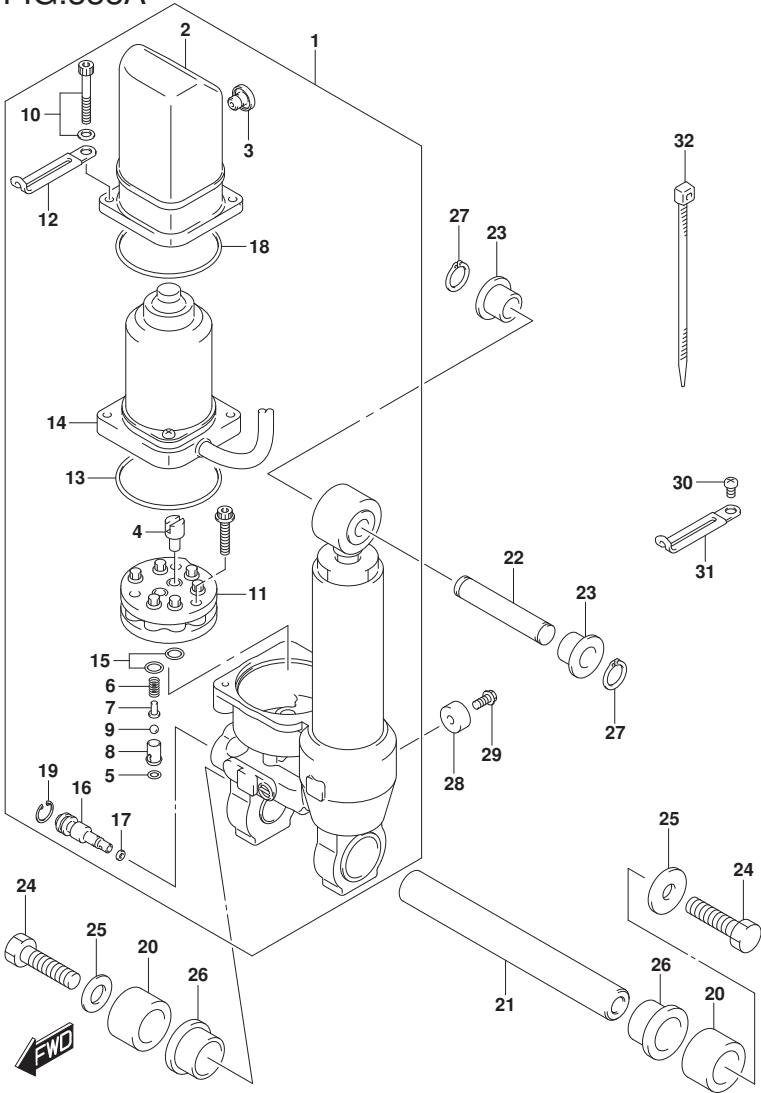

DF25A_30A_P01_022_338A
TILT CYLINDER

FIG.338A (1-H-4) TILT CYLINDER (DF25AT,DF25ATH,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	48000-94L04	POWER TILT ASSY	1	
2	48571-89J01	.RESERVOIR	1	
3	48572-89J01	.PLUG	1	
4	48583-95E00	.JOINT, DRIVE	1	
5	48818-97E00	.O RING, VALVE HSG	1	
6	48823-89J00	.SPRING, PRESSURE	1	
7	48832-89J00	.VALVE, PRESSURE	1	
8	48834-89J00	.SHEET, VALVE	1	
9	48842-89J00	.BALL, PRESSURE VALVE	1	
10	48861-89J01	.BOLT, RESERVOIR	2	
11	48510-89J00	.PUMP ASSY	1	
12	29404-93J11	.CLAMP (L:65)	1	
13	31123-89J10	.O RING	1	
14	38100-94L02	.MOTOR ASSY, PT	1	
15	48518-87D00	.O RING	1	
16	48551-89J00	.VALVE, MANUAL	1	
17	48553-97E00	.SEAL, WASHER	1	
18	48585-89J00	.O RING, RESERVOIR	1	
19	48681-87J11	.CIRCLIP	1	
20	47226-94L00	SPACER, TILT CYL LOWER PORT	2	LOWER
21	48121-94LA0	SHAFT, TILT CYL LOWER	1	LOWER
22	48321-94L00	SHAFT, TILT CYL UPPER	1	UPPER
23	48325-94L00	BUSH, TILT CYL UPPER	2	UPPER
24	09100-10323	BOLT (10X35)	2	
25	09160-10158	WASHER (10.5X30X3)	2	
26	48326-94L00	BUSH, TILT CYL LOWER	2	
27	09380-12002	SNAP RING	2	
28	55321-87J01	ANODE, PROTECTION	1	
29	09103-06281	BOLT (6X14)	1	
30	09125-06063	SCREW (6X10)	1	
31	09404-06032	CLAMP (L:65)	1	

DF25A_30A_P01_022

FIG.338A

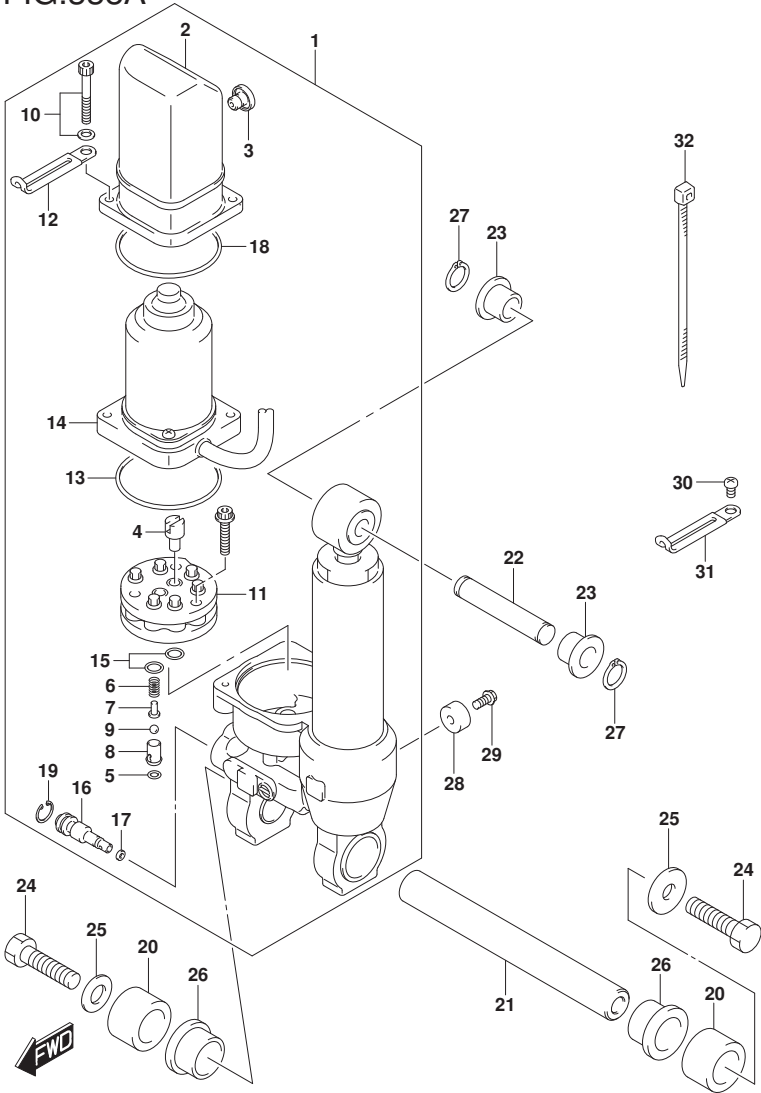


FIG.338A (1-H-5) TILT CYLINDER (DF25AT,DF25ATH,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
32	09407-14407	CLAMP (L:145)	1	

DF25AT P01
DF25ATH P01
DF30AT P01
DF30ATH P01

FIG.339A

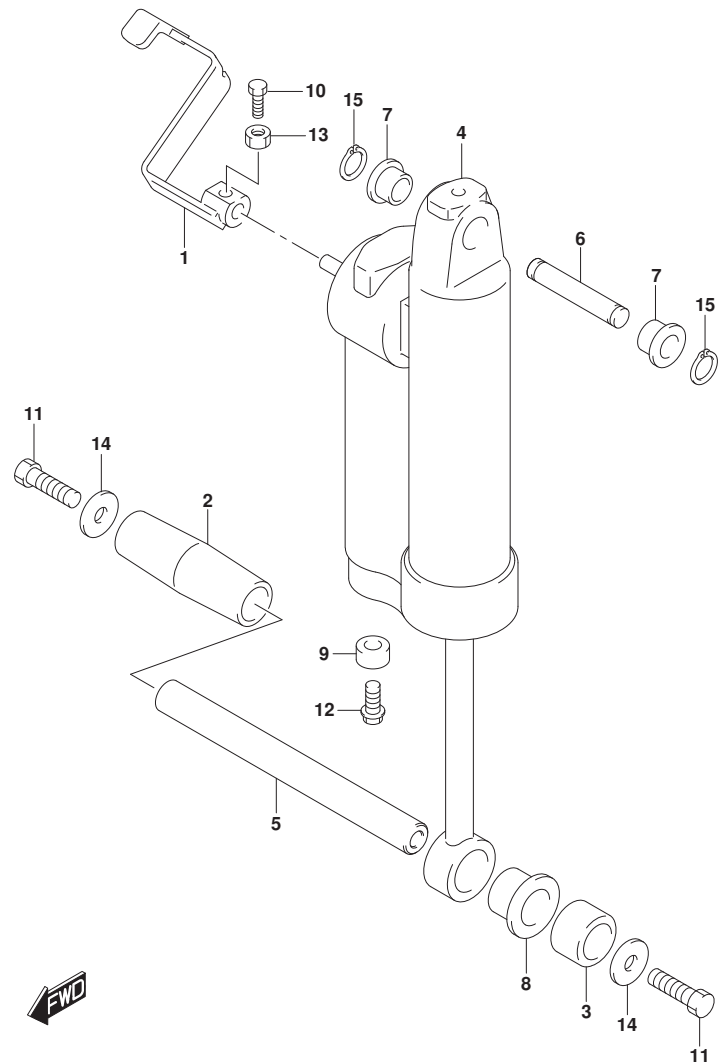


FIG.339A (1-H-6) GAS CYLINDER (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	45260-94LA0	LEVER, RELEASE	1	
2	47225-94L00	SPACER, TILT CYL LOWER STBD	1	LOWER,STBD
3	47226-94L00	SPACER, TILT CYL LOWER PORT	1	LOWER,PORT
4	47400-95J02	CYLINDER ASSY, GAS	1	
5	48121-94LA0	SHAFT, TILT CYL LOWER	1	LOWER
6	48321-94L00	SHAFT, TILT CYL UPPER	1	UPPER
7	48325-94L00	BUSH, TILT CYL UPPER	2	UPPER
8	48326-94L00	BUSH, TILT CYL LOWER	1	LOWER
9	55321-87J01	ANODE, PROTECTION	1	
10	09100-06113	BOLT (6X16)	1	
11	09100-10323	BOLT (10X35)	2	
12	09103-06281	BOLT (6X14)	1	
13	09140-06020	NUT	1	
14	09160-10158	WASHER (10.5X30X3)	2	
15	09380-12002	SNAP RING	2	

DF30AQ P01

FIG.340A

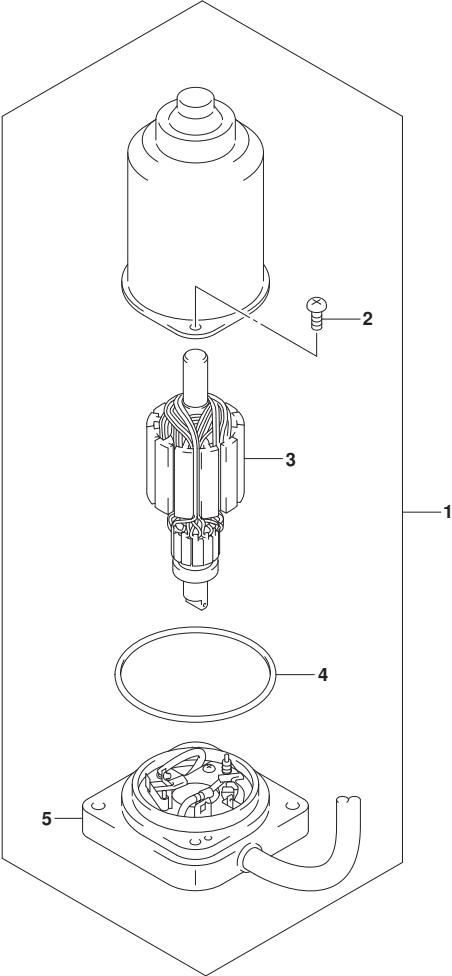


FIG.340A (1-H-7) PTT MOTOR (DF25AT,DF25ATH,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	38100-94L02	MOTOR ASSY, PT	1	
2	31111-89J00	.SCREW	2	
3	31311-89J00	.ARMATURE	1	
4	31123-89J00	.O RING	1	
5	31173-94L02	.BRACKET, PT MOTOR	1	

DF25AT P01
DF25ATH P01
DF30AT P01
DF30ATH P01



FIG.401A

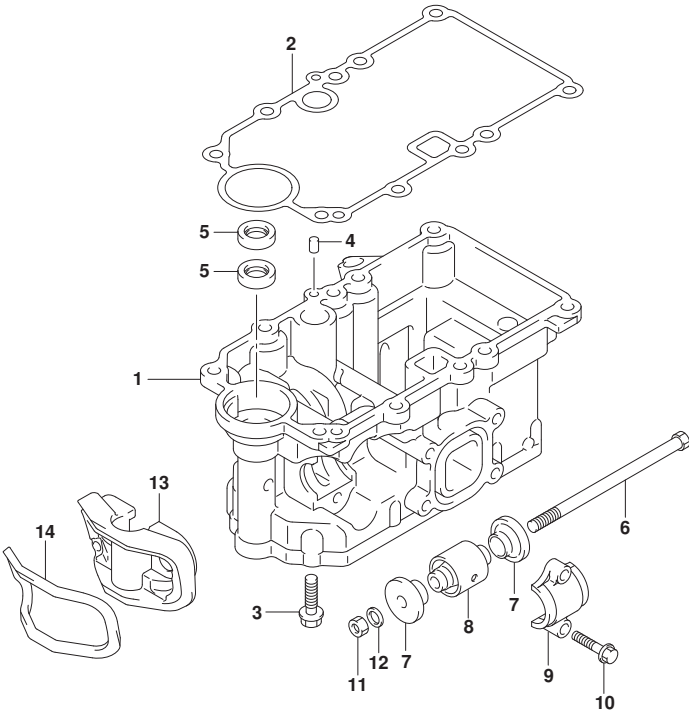


FIG.401A (1-H-8) ENGINE HOLDER

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	51110-94L00	HOLDER, ENGINE	1	020,021
1-2	51110-94L10	HOLDER, ENGINE	1	022
2	51211-94L00	GASKET, ENGINE HOLDER	1	
3	09116-08150	BOLT (8X27)	10	
4	09202-06023	PIN (6X10)	2	
5	09282-15009	OIL SEAL (14.7X25X6.5)	2	
6	54112-94L00	BOLT, UPPER MOUNT	2	UPPER
7	54125-94L00	STOPPER, UPPER MOUNT THRUST	4	UPPER
8	54130-94L00	MOUNT, UPPER	2	UPPER
9	54137-94L00	COVER, UPPER MOUNT	2	UPPER
10	09116-08152	BOLT (8X35)	4	
11	09140-10031	NUT (M10)	2	
12	09160-10156	WASHER (10.3X16.5X2.5)	2	
13	54144-94L00	SEAL, UPPER MOUNT	1	UPPER
14	54145-94L00	SEAL, UPPER MOUNT NO.2	1	UPPER



FIG.405A

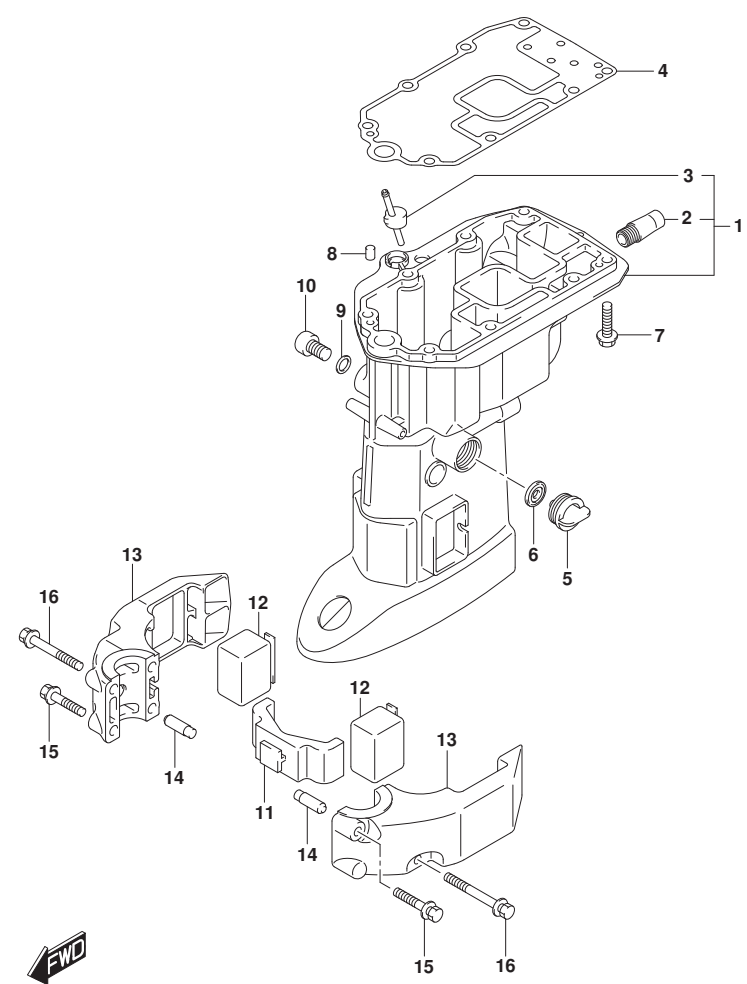


FIG.405A (1-H-9) DRIVE SHAFT HOUSING (DF25A,DF25AR,DF30AR)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	52110-94L01-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(S):(020,021)
1-2	52110-94L20-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(S):022
1-3	52110-94L11-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(L):(020,021)
1-4	52110-94L30-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(L):022
2	43112-94L01	.PIPE, EXHAUST	1	
3	61155-94L00	.TUBE, WATER INSP	1	
4	52113-94L00	GASKET, DRIVE SHAFT HOUSING	1	
5	17913-93J00	PLUG, WATER	1	
6	17914-93J01	GASKET, WATER PLUG	1	
7	09116-08151	BOLT (8X30)	8	
8	09202-06023	PIN (6X10)	2	
9	09168-12017	GASKET (12X17X1)	1	
10	09248-12009	PLUG (12X18.65)	1	
11	54151-94L00	MOUNT, LOWER THRUST	1	LOWER
12	54167-94L00	MOUNT, LOWER SIDE	2	LOWER
13	54211-94L00-YAY	COVER, LOWER MOUNT (BLACK)	2	LOWER
14	54213-93901	PIN, LOWER MOUNT COVER KNOCK	2	
15	09116-08154	BOLT (8X40)	2	
16	09116-08162	BOLT (8X65)	2	

DF25A P01
DF25AR P01
DF30AR P01

FIG.405B

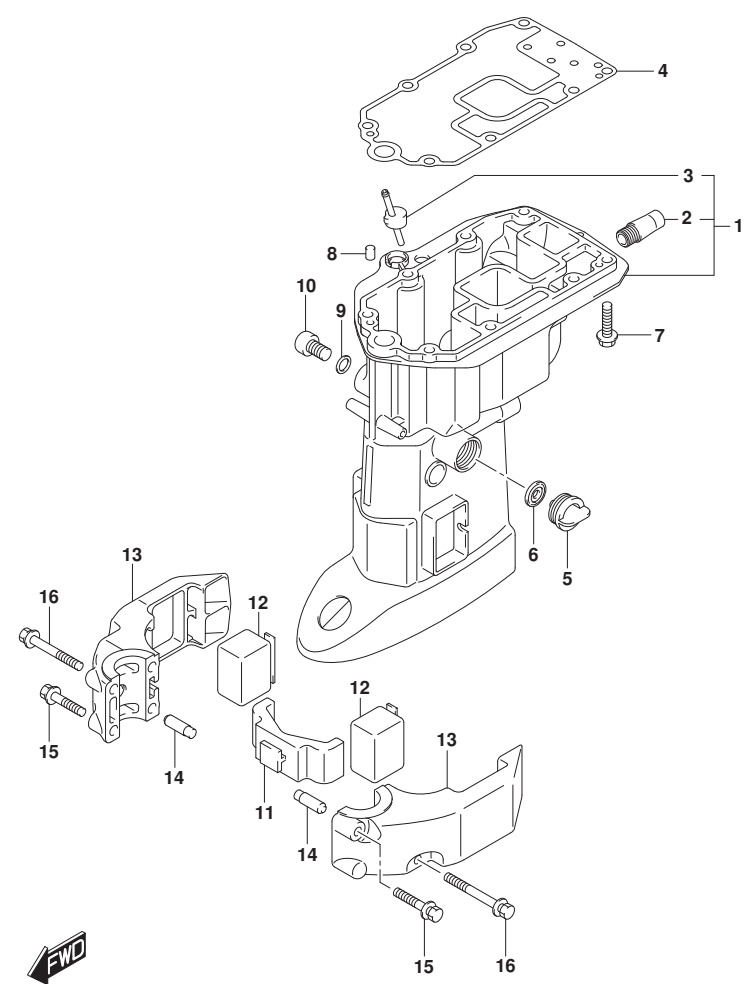


FIG.405B (1-H-10) DRIVE SHAFT HOUSING (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	52110-94L01-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(S):(020,021)
1-2	52110-94L20-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(S):022
1-3	52110-94L01-Y5S	HOUSING, DRIVE SHAFT (WHITE)	1	W/TRANSOM(S)
1-4	52110-94L11-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(L):(020,021)
1-5	52110-94L30-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(L):022
1-6	52110-94L11-Y5S	HOUSING, DRIVE SHAFT (WHITE)	1	W/TRANSOM(L)
2	43112-94L01	.PIPE, EXHAUST	1	
3	61155-94L00	.TUBE, WATER INSP	1	
4	52113-94L00	GASKET, DRIVE SHAFT HOUSING	1	
5	17913-93J00	PLUG, WATER	1	
6	17914-93J01	GASKET, WATER PLUG	1	
7	09116-08151	BOLT (8X30)	8	
8	09202-06023	PIN (6X10)	2	
9	09168-12017	GASKET (12X17X1)	1	
10	09248-12009	PLUG (12X18.65)	1	
11	54151-94L00	MOUNT, LOWER THRUST	1	LOWER
12	54167-94L00	MOUNT, LOWER SIDE	2	LOWER
13-1	54211-94L00-YAY	COVER, LOWER MOUNT (BLACK)	2	LOWER
13-2	54211-94L00-Y5S	COVER, LOWER MOUNT (WHITE)	2	LOWER
14	54213-93901	PIN, LOWER MOUNT COVER KNOCK	2	
15	09116-08154	BOLT (8X40)	2	
16	09116-08162	BOLT (8X65)	2	

NOTE : DF25AT,DF25ATH,DF30A,DF30AT,DF30ATH

DF25AT P01
DF25ATH P01
DF30A P40
DF30AT P01
DF30ATH P01

FIG.405C

FIG.405C (1-H-11) DRIVE SHAFT HOUSING (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	52110-94L01-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(S):(020,021)
1-2	52110-94L20-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(S):022
1-3	52110-94L11-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(L):(020,021), W/TRANSOM(X)
1-4	52110-94L30-YAY	HOUSING, DRIVE SHAFT (BLACK)	1	W/TRANSOM(L):022
2	43112-94L01	.PIPE, EXHAUST	1	
3	61155-94L00	.TUBE, WATER INSP	1	
4	52113-94L00	GASKET, DRIVE SHAFT HOUSING	1	
5	17913-93J00	PLUG, WATER	1	
6	17914-93J01	GASKET, WATER PLUG	1	
7	09116-08151	BOLT (8X30)	8	
8	09202-06023	PIN (6X10)	2	
9	09168-12017	GASKET (12X17X1)	1	
10	09248-12009	PLUG (12X18.65)	1	
11	54151-94L00	MOUNT, LOWER THRUST	1	LOWER
12	54167-94L00	MOUNT, LOWER SIDE	2	LOWER
13	54211-94L00-YAY	COVER, LOWER MOUNT (BLACK)	2	LOWER
14	54213-93901	PIN, LOWER MOUNT COVER KNOCK	2	
15	09116-08154	BOLT (8X40)	2	
16	09116-08162	BOLT (8X65)	2	
17	52131-94L00-YAY	CASE, EXTENSION (BLACK)	1	W/TRANSOM(X)
18	57130-96300	BUSH, DRIVE SHAFT	1	W/TRANSOM(X)
19	09108-08104	STUD BOLT (8X157)	6	W/TRANSOM(X)
20	09202-06023	PIN (6X10)	2	W/TRANSOM(X)

DF30AQ P01


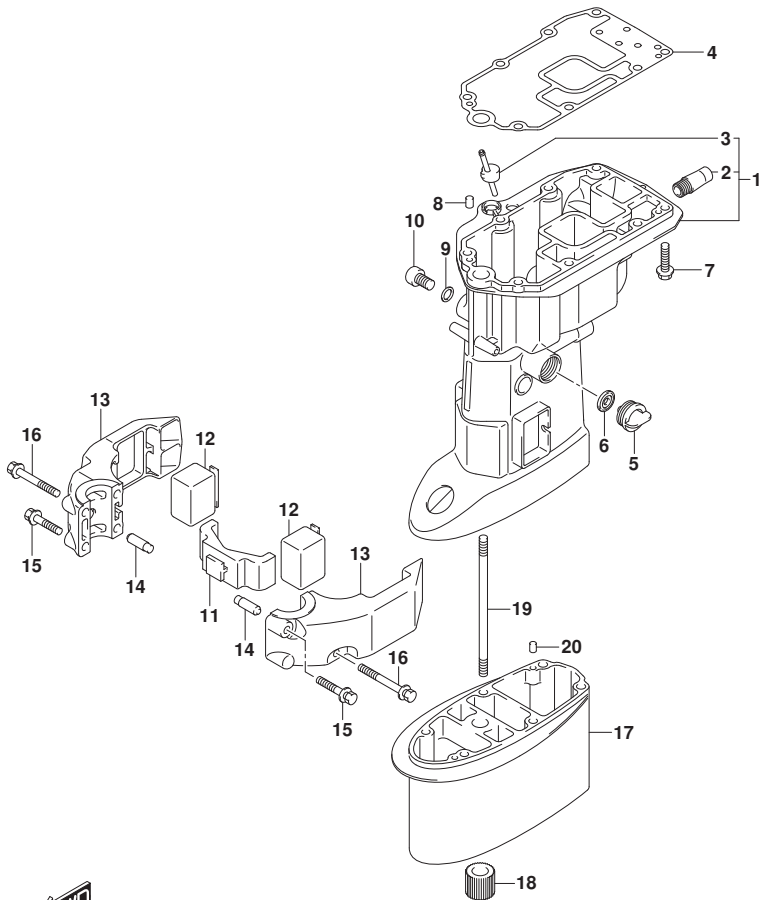


FIG.407A

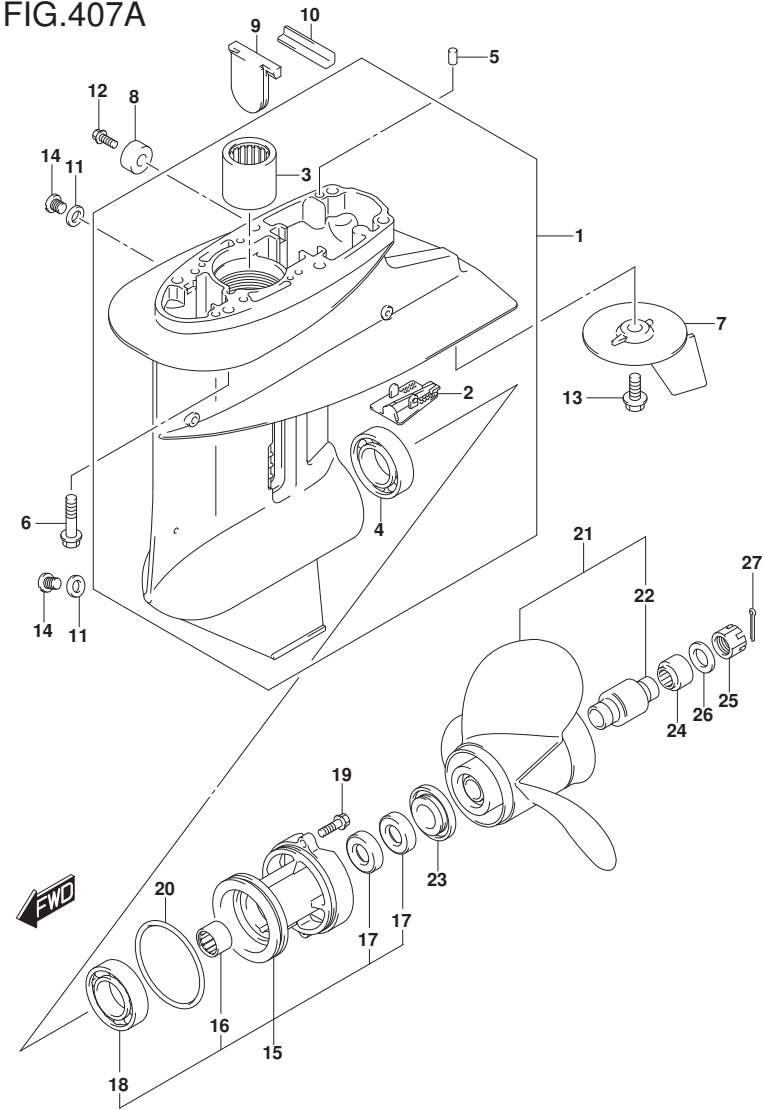

DF25A_30A_P01_022_407A
GEAR CASE

FIG.407A (1-H-12) GEAR CASE (DF25A,DF25AR,DF30AR)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	55100-94L00-YAY	CASE ASSY, GEAR (BLACK)	1	
2	55114-963L0	.COVER, GEAR CASE UNDER	1	
3	09263-20046	.BEARING (20.6X27X25.4)	1	
4	09265-25047	.BEARING (25X52X16.25)	1	
5	09202-06023	PIN (6X10)	2	
6	09116-08154	BOLT (8X40)	6	
7	55125-96310	TAB, TRIM	1	
8	55321-87J01	ANODE, PROTECTION	1	
9	55332-94L00	RUBBER, EXHAUST SEAL	1	
10	55333-94L10	PLATE, EXHAUST SEAL	1	
11	59178-97J00	GASKET, DRAIN PLUG	2	
12	09103-06281	BOLT (6X14)	1	
13-1	09116-08137	BOLT (8X22)	1	020
13-2	09116-08148	BOLT (8X22)	1	021,022
14	09248-08001	PLUG (8X7.5)	2	
15	56120-91L11-YAY	HOUSING, PROPELLER SHAFT BRG (BLACK)	1	
16	09263-20047	.BEARING (20X26X20)	1	
17	09289-20L01	.OIL SEAL (20X34X6.5)	2	
18	08113-60060	.BEARING	1	
19	09116-06229	BOLT (6X25)	2	
20	09280-75002	O RING (D:3.5,ID:68.6)	1	
21-1	58100-91L40-019	PROPELLER (3X10-1/4X10)	1	
21-2	58100-91L50-019	PROPELLER (3X10-1/4X11)	1	
21-3	58100-91L20-019	PROPELLER (3X10-1/4X12)	1	
21-4	58100-91L30-019	PROPELLER (3X10-1/4X13)	1	
21-5	58100-95D01-019	PROPELLER (3X10-1/4X14)	1	
21-6	58100-96372-019	PROPELLER (3X10-1/4X9)	1	
21-7	58100-96472-019	PROPELLER (3X10-1/4X10)	1	
21-8	58100-96482-019	PROPELLER (3X10-1/4X12)	1	
21-9	58100-96492-019	PROPELLER (3X10-1/4X13)	1	OPT
21-10	58100-96462-019	PROPELLER (3X10-1/4X15)	1	OPT
22	58120-96401	.BUSH, PROPELLER	1	
23	57632-91L00	STOPPER, PROPELLER BUSH	1	
24	57633-96300	SPACER, PROPELLER NUT	1	
25	09141-14008	NUT	1	

FIG.407A

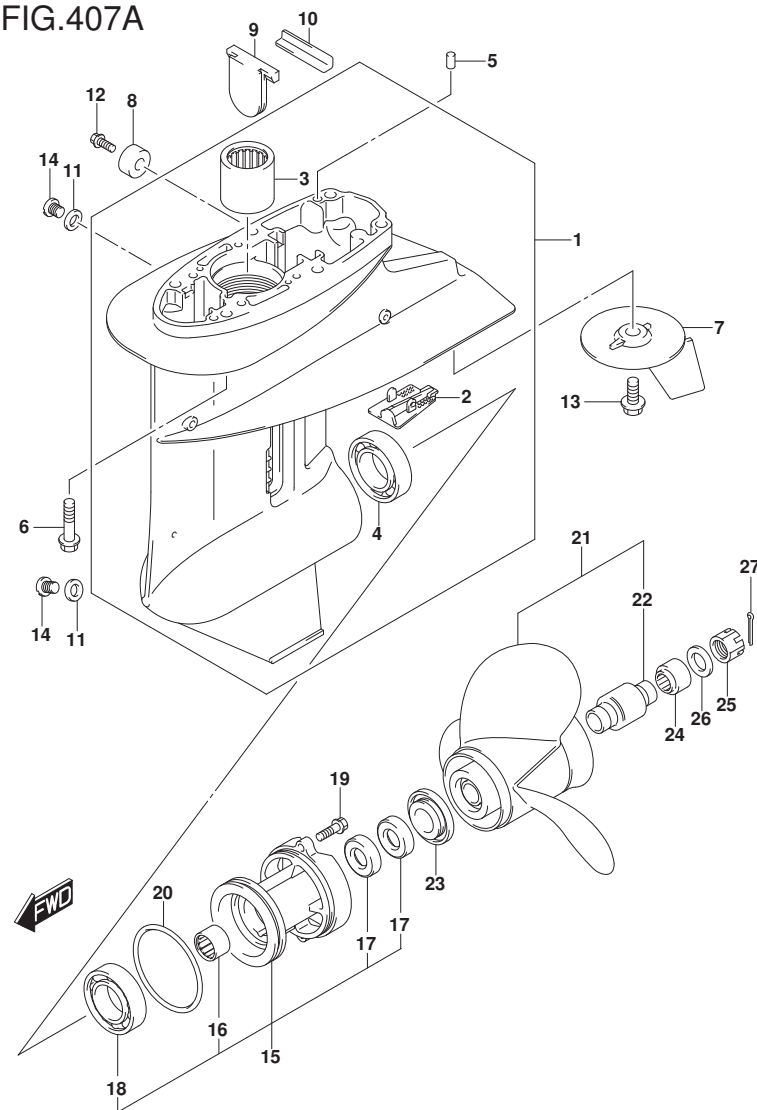


FIG.407A (1-H-13) GEAR CASE (DF25A,DF25AR,DF30AR)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
26	09160-14028	WASHER (14.5X30X2.5)	1	
27	09204-03003	PIN (D:3.6,L:25)	1	

DF25A P01
DF25AR P01
DF30AR P01

FIG.407B

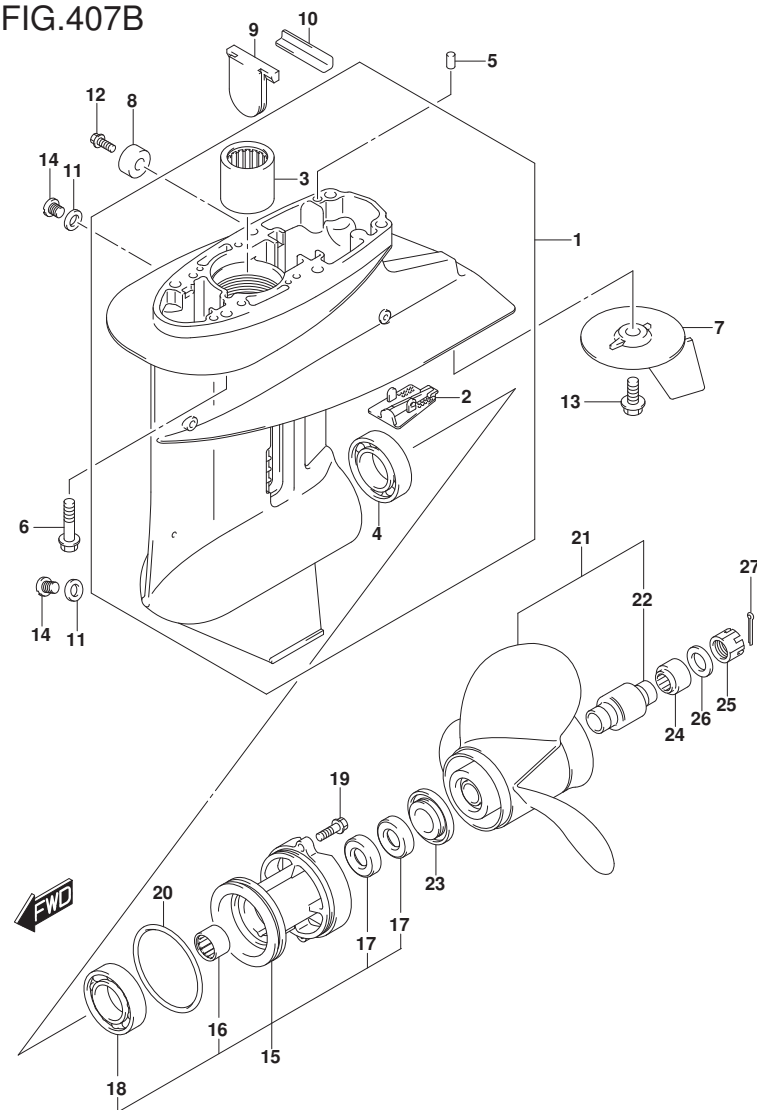


FIG.407B (1-H-14) GEAR CASE (DF25AT,DF25ATH,DF30A,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	55100-94L00-YAY	CASE ASSY, GEAR (BLACK)	1	
1-2	55100-94L00-Y5S	CASE ASSY, GEAR (WHITE)	1	
2	55114-963L0	.COVER, GEAR CASE UNDER	1	
3	09263-20046	.BEARING (20.6X27X25.4)	1	
4	09265-25047	.BEARING (25X52X16.25)	1	
5	09202-06023	PIN (6X10)	2	
6	09116-08154	BOLT (8X40)	6	
7	55125-96310	TAB, TRIM	1	
8	55321-87J01	ANODE, PROTECTION	1	
9	55332-94L00	RUBBER, EXHAUST SEAL	1	
10	55333-94L10	PLATE, EXHAUST SEAL	1	
11	59178-97J00	GASKET, DRAIN PLUG	2	
12	09103-06281	BOLT (6X14)	1	
13-1	09116-08137	BOLT (8X22)	1	020
13-2	09116-08148	BOLT (8X22)	1	021,022
14	09248-08001	PLUG (8X7.5)	2	
15-1	56120-91L11-YAY	HOUSING, PROPELLER SHAFT BRG (BLACK)	1	
15-2	56120-91L11-Y5S	HOUSING, PROPELLER SHAFT BRG (WHITE)	1	
16	09263-20047	.BEARING (20X26X20)	1	
17	09289-20L01	.OIL SEAL (20X34X6.5)	2	
18	08113-60060	.BEARING	1	
19	09116-06229	BOLT (6X25)	2	
20	09280-75002	O RING (D:3.5,ID:68.6)	1	
21-1	58100-91L40-019	PROPELLER (3X10-1/4X10)	1	
21-2	58100-91L50-019	PROPELLER (3X10-1/4X11)	1	
21-3	58100-91L20-019	PROPELLER (3X10-1/4X12)	1	
21-4	58100-91L30-019	PROPELLER (3X10-1/4X13)	1	
21-5	58100-95D01-019	PROPELLER (3X10-1/4X14)	1	
21-6	58100-96372-019	PROPELLER (3X10-1/4X9)	1	
21-7	58100-96472-019	PROPELLER (3X10-1/4X10)	1	
21-8	58100-96482-019	PROPELLER (3X10-1/4X12)	1	
21-9	58100-96492-019	PROPELLER (3X10-1/4X13)	1	OPT
21-10	58100-96462-019	PROPELLER (3X10-1/4X15)	1	OPT
22	58120-96401	.BUSH, PROPELLER	1	

FIG.407B


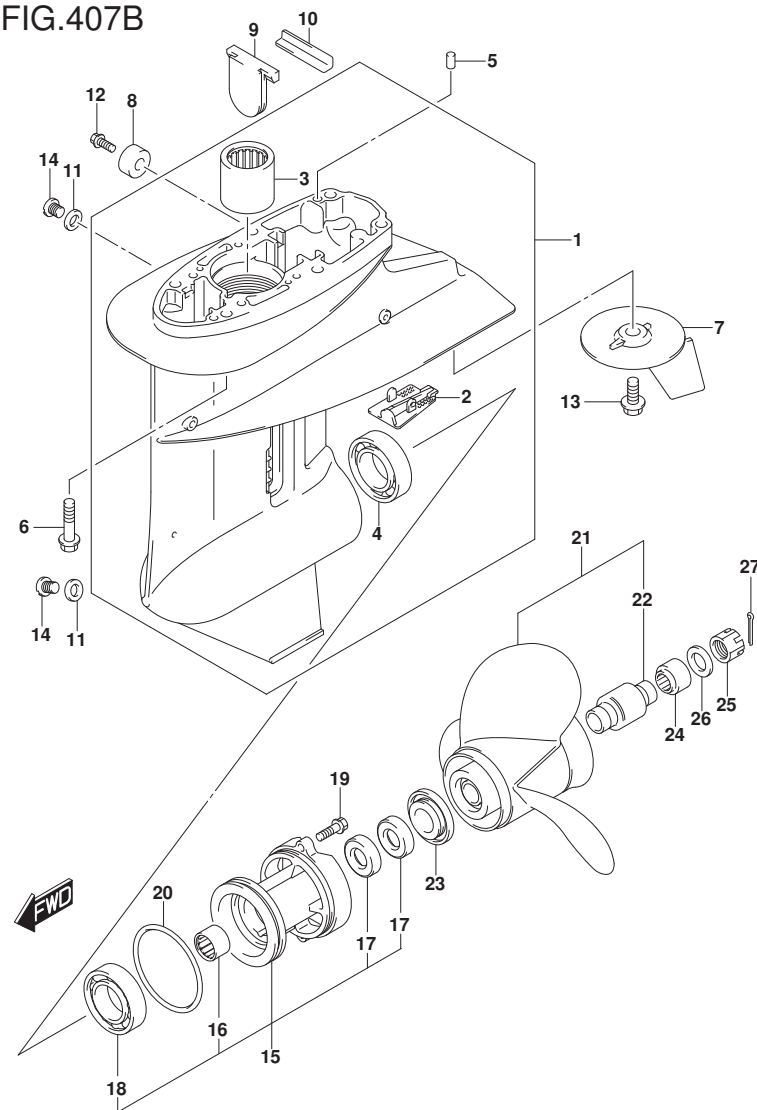


FIG.407B (1-H-15) GEAR CASE (DF25AT,DF25ATH,DF30A,DF30AT,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
23	57632-91L00	STOPPER, PROPELLER BUSH	1	
24	57633-96300	SPACER, PROPELLER NUT	1	
25	09141-14008	NUT	1	
26	09160-14028	WASHER (14.5X30X2.5)	1	
27	09204-03003	PIN (D:3.6,L:25)	1	

DF25AT P01
DF25ATH P01
DF30A P40
DF30AT P01
DF30ATH P01

FIG.407C

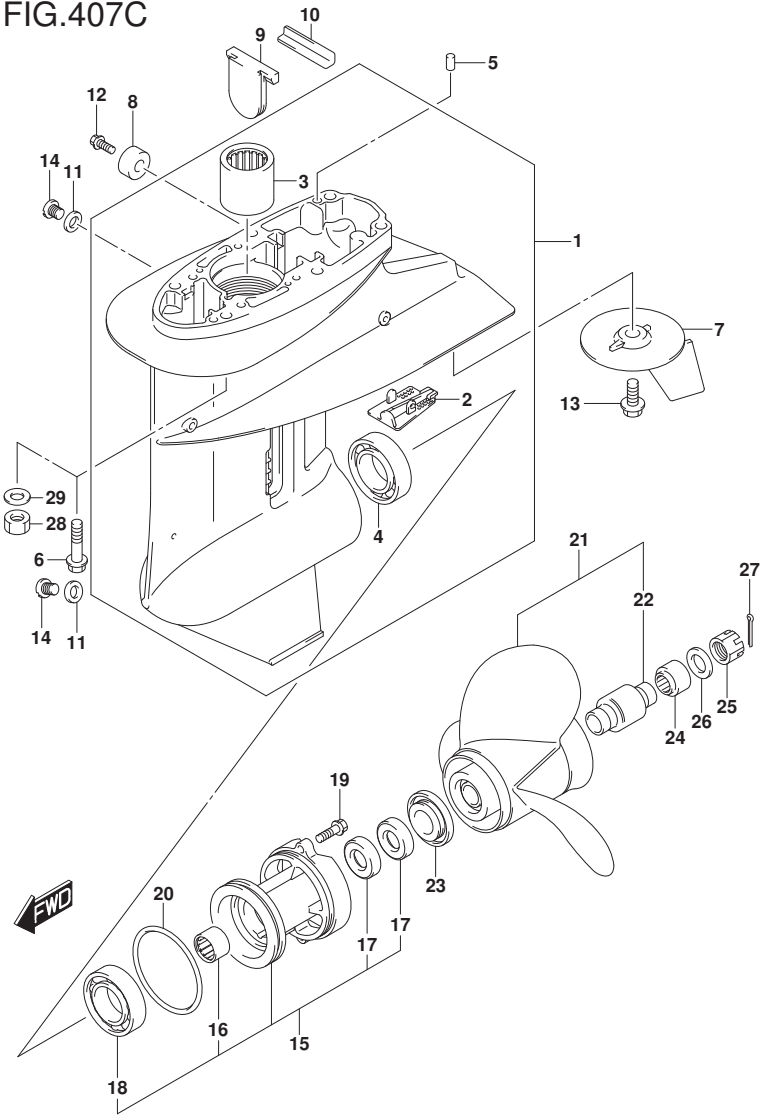

DF25A_30A_P01_022_407C
GEAR CASE

FIG.407C (1-I-2) GEAR CASE (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	55100-94L00-YAY	CASE ASSY, GEAR (BLACK)	1	
2	55114-963L0	.COVER, GEAR CASE UNDER	1	
3	09263-20046	.BEARING (20.6X27X25.4)	1	
4	09265-25047	.BEARING (25X52X16.25)	1	
5	09202-06023	PIN (6X10)	2	
6	09116-08154	BOLT (8X40)	6	W/TRANSOM(S),W/TRANSOM(L)
7	55125-96310	TAB, TRIM	1	
8	55321-87J01	ANODE, PROTECTION	1	
9	55332-94L00	RUBBER, EXHAUST SEAL	1	
10	55333-94L10	PLATE, EXHAUST SEAL	1	
11	59178-97J00	GASKET, DRAIN PLUG	2	
12	09103-06281	BOLT (6X14)	1	
13-1	09116-08137	BOLT (8X22)	1	020
13-2	09116-08148	BOLT (8X22)	1	021,022
14	09248-08001	PLUG (8X7.5)	2	
15	56120-91L11-YAY	HOUSING, PROPELLER SHAFT BRG (BLACK)	1	
16	09263-20047	.BEARING (20X26X20)	1	
17	09289-20L01	.OIL SEAL (20X34X6.5)	2	
18	08113-60060	.BEARING	1	
19	09116-06229	BOLT (6X25)	2	
20	09280-75002	O RING (D:3.5,ID:68.6)	1	
21-1	58100-91L40-019	PROPELLER (3X10-1/4X10)	1	
21-2	58100-91L50-019	PROPELLER (3X10-1/4X11)	1	
21-3	58100-91L20-019	PROPELLER (3X10-1/4X12)	1	
21-4	58100-91L30-019	PROPELLER (3X10-1/4X13)	1	
21-5	58100-95D01-019	PROPELLER (3X10-1/4X14)	1	
21-6	58100-96372-019	PROPELLER (3X10-1/4X9)	1	
21-7	58100-96472-019	PROPELLER (3X10-1/4X10)	1	
21-8	58100-96482-019	PROPELLER (3X10-1/4X12)	1	
21-9	58100-96492-019	PROPELLER (3X10-1/4X13)	1	
21-10	58100-96462-019	PROPELLER (3X10-1/4X15)	1	
22	58120-96401	.BUSH, PROPELLER	1	
23	57632-91L00	STOPPER, PROPELLER BUSH	1	
24	57633-96300	SPACER, PROPELLER NUT	1	
25	09141-14008	NUT	1	

FIG.407C

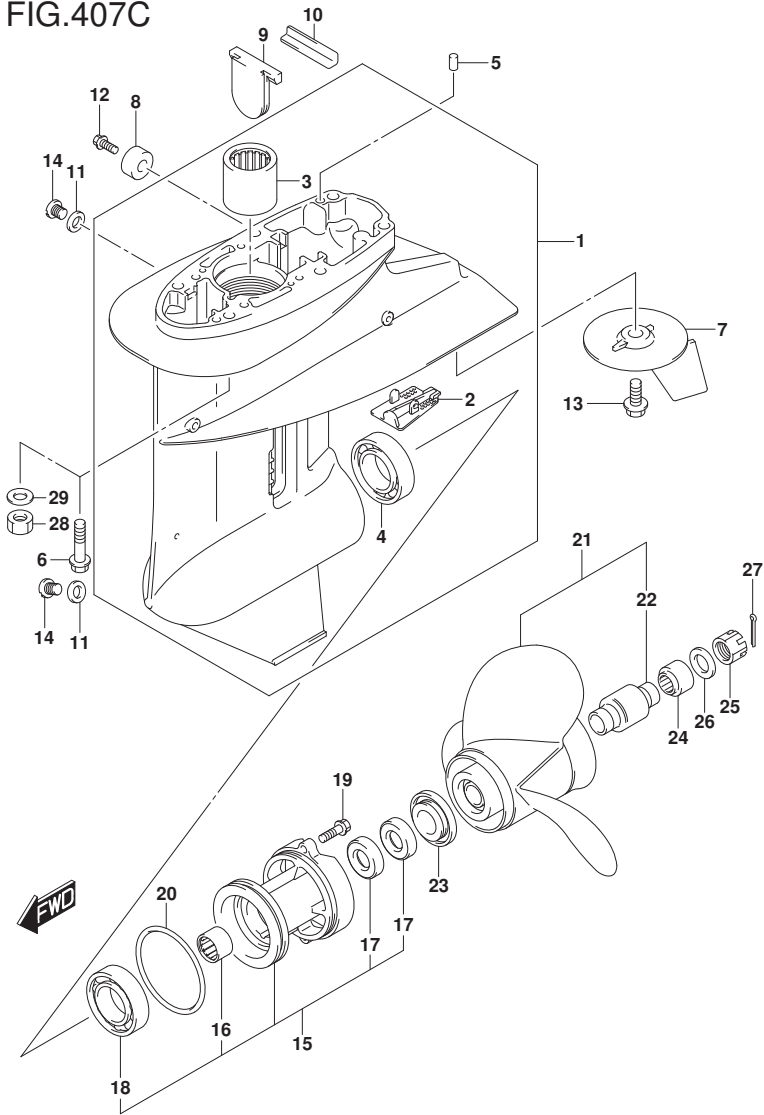


FIG.407C (1-1-3) GEAR CASE (DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
26	09160-14028	WASHER (14.5X30X2.5)	1	
27	09204-03003	PIN (D:3.6,L:25)	1	
28	09140-08016	NUT	6	W/TRANSOM(X)
29	09160-08082	WASHER (8.5X16X1.2)	6	W/TRANSOM(X)

DF30AQ P01

FIG.410A

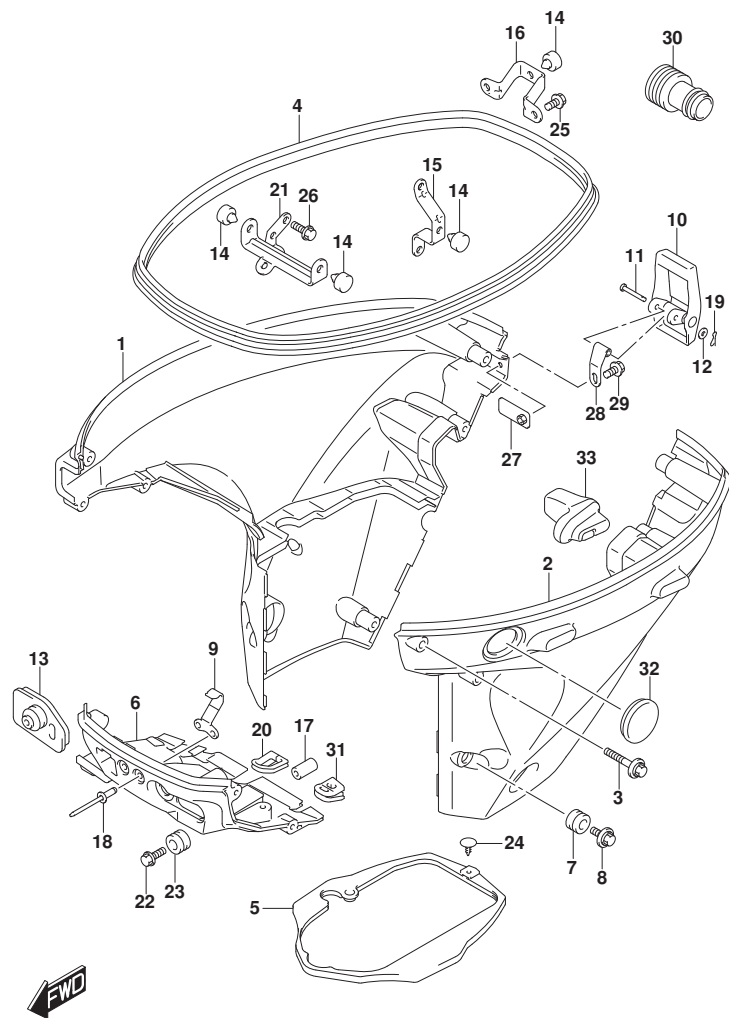


FIG.410A (1-I-4) SIDE COVER (DF25A,DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	61810-94L10-YAY	COVER, SIDE STBD (BLACK)	1	STBD
2	61820-94L00-YAY	COVER, SIDE PORT (BLACK)	1	PORT
3	09116-06523	BOLT (6X35)	8	
4	61112-94L10	RUBBER, SIDE COVER	1	
5	61134-94L00	SEAL, SIDE COVER	1	
6	61830-94L00-YAY	PANEL, FRONT (BLACK)	1	
7	09320-11017	CUSHION (11X20X13.5)	2	
8	09116-06522	BOLT (6X17)	2	
9	61412-89L00	HOOK, FR PANEL	1	
10	61610-90L00	FASTENER	1	
11	61616-93EL0	PIN, LEVER	1	
12	09161-04012	WASHER (4.2X11X1)	1	
13-1	61124-94L00	GROMMET, CABLE	1	W/MANUAL STARTER
13-2	61124-94L20	GROMMET, CABLE	1	W/ELECTRIC STARTER
14	61151-91J11	CUSHION, LOWER COVER HOLDER	4	LOWER
15	61827-94L00	HOLDER, SIDE COVER	1	
16	61829-94L00	HOLDER, SIDE COVER REAR	1	
17	09251-09007	CUSHION	1	
18	09229-04005	RIVET	2	
19	09385-04003	CLIP	1	
20	23131-94L00	BOOT, CLUTCH ROD	1	
21	61841-94L00	HOLDER, SIDE COVER	1	
22	09116-06522	BOLT (6X17)	1	
23	09320-11017	CUSHION (11X20X13.5)	1	
24	09409-05302-5PK	CLIP (BLACK)	1	
25	01550-0616C	BOLT	2	
26	01550-0820C	BOLT	1	
27	61620-94L00	PLATE, FASTENER HOLDER	1	
28	61642-90L00	HOLDER, FASTENER LEVER	1	
29	09116-06223	BOLT (6X12)	1	
30	17917-87L00	CONNECTOR, FLUSH WATER	1	
31	36656-94L00	GROMMET, PT CABLE	1	
32	37853-94L00	PLUG, PT SWITCH HOLE	1	

FIG.410A

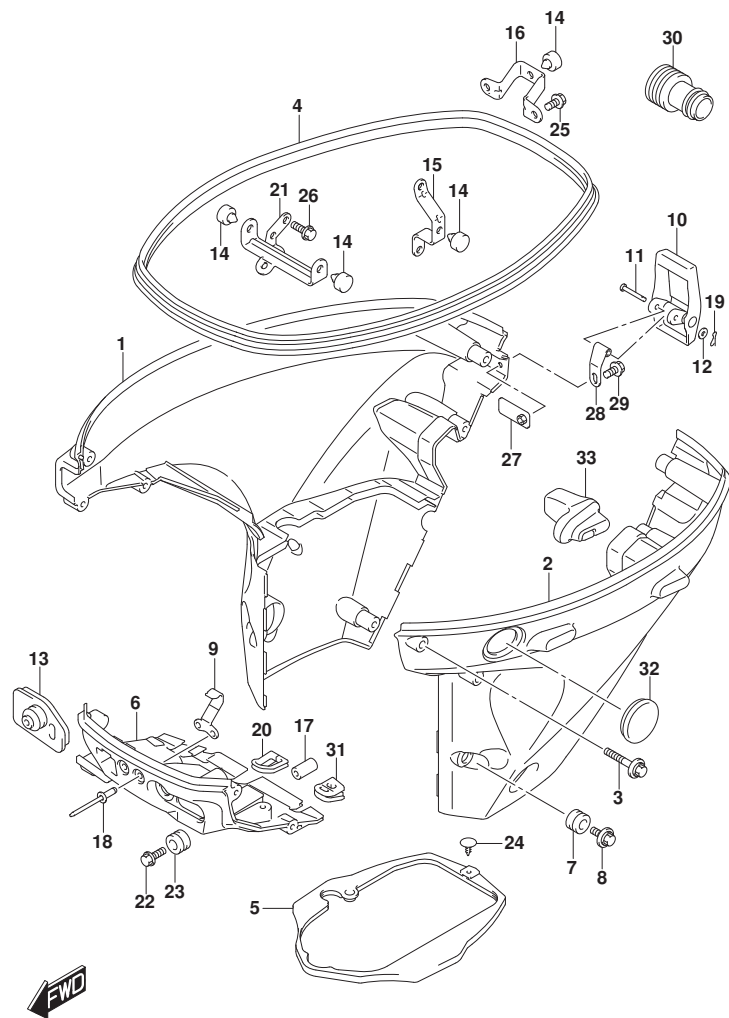


FIG.410A (1-1-5) SIDE COVER (DF25A,DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
33	61151-94L00	CUSHION, SIDE COVER	1	

DF25A P01
DF30AQ P01

FIG.410B

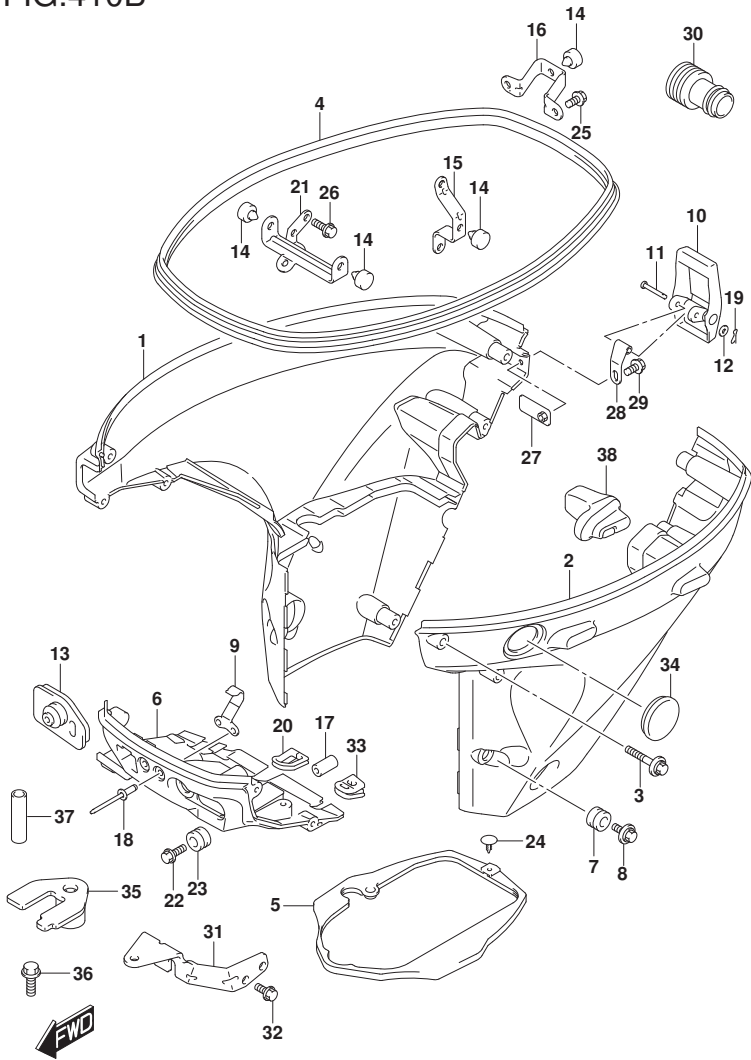


FIG.410B (1-I-6) SIDE COVER (DF25AR,DF30AR)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	61810-94L10-YAY	COVER, SIDE STBD (BLACK)	1	STBD
2	61820-94L00-YAY	COVER, SIDE PORT (BLACK)	1	PORT
3	09116-06523	BOLT (6X35)	8	
4	61112-94L10	RUBBER, SIDE COVER	1	
5	61134-94L00	SEAL, SIDE COVER	1	
6	61830-94L00-YAY	PANEL, FRONT (BLACK)	1	
7	09320-11017	CUSHION (11X20X13.5)	2	
8	09116-06522	BOLT (6X17)	2	
9	61412-89L00	HOOK, FR PANEL	1	
10	61610-90L00	FASTENER	1	
11	61616-93EL0	PIN, LEVER	1	
12	09161-04012	WASHER (4.2X11X1)	1	
13	61124-94L10	GROMMET, R/CON CABLE	1	
14	61151-91J11	CUSHION, LOWER COVER HOLDER	4	LOWER
15	61827-94L00	HOLDER, SIDE COVER	1	
16	61829-94L00	HOLDER, SIDE COVER REAR	1	
17	09251-09007	CUSHION	1	
18	09229-04005	RIVET	2	
19	09385-04003	CLIP	1	
20	23131-94L00	BOOT, CLUTCH ROD	1	
21	61841-94L00	HOLDER, SIDE COVER	1	
22	09116-06522	BOLT (6X17)	1	
23	09320-11017	CUSHION (11X20X13.5)	1	
24	09409-05302-5PK	CLIP (BLACK)	1	
25	01550-0616C	BOLT	2	
26	01550-0820C	BOLT	1	
27	61620-94L00	PLATE, FASTENER HOLDER	1	
28	61642-90L00	HOLDER, FASTENER LEVER	1	
29	09116-06223	BOLT (6X12)	1	
30	17917-87L00	CONNECTOR, FLUSH WATER	1	
31	67341-94L00	HOLDER, R/CON CABLE	1	
32	01547-0616C	BOLT	2	
33	36656-94L00	GROMMET, PT CABLE	1	
34	37853-94L00	PLUG, PT SWITCH HOLE	1	
35	67343-94L00	STOPPER, R/CON CABLE	1	
36	09116-06225	BOLT (6X16)	1	

FIG.410B

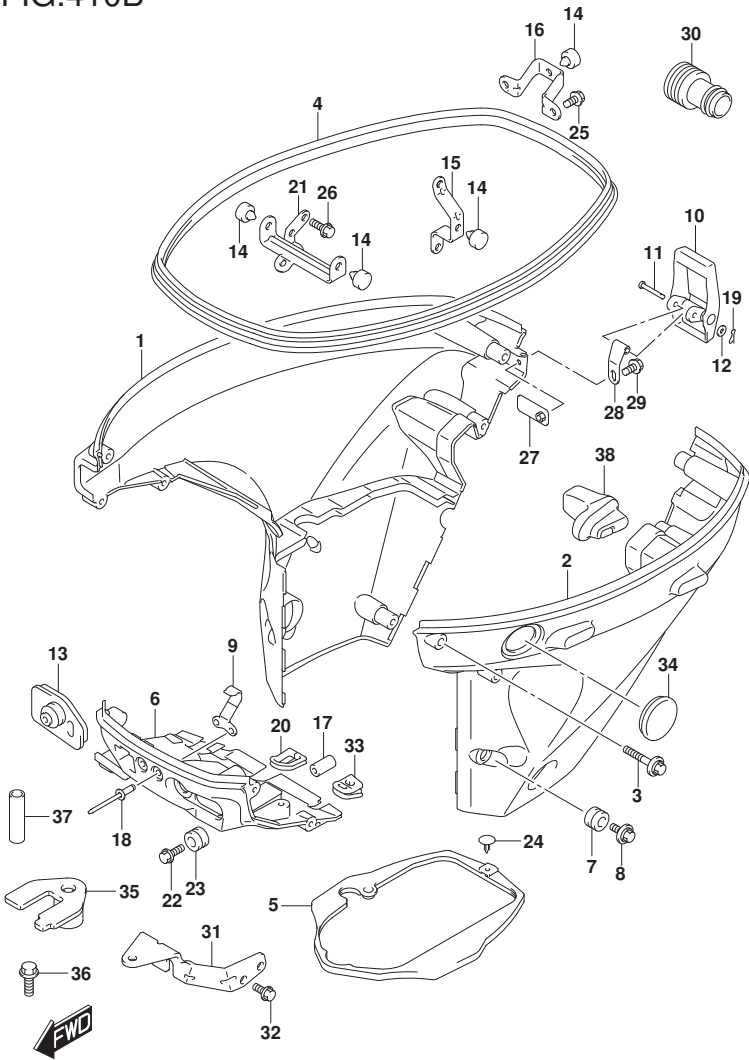


FIG.410B (1-I-7) SIDE COVER (DF25AR,DF30AR)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
37	09352-70104-600	HOSE (7X10.2X600)	2	L:600->14
38	61151-94L00	CUSHION, SIDE COVER	1	

DF25AR P01
DF30AR P01

FIG.410C

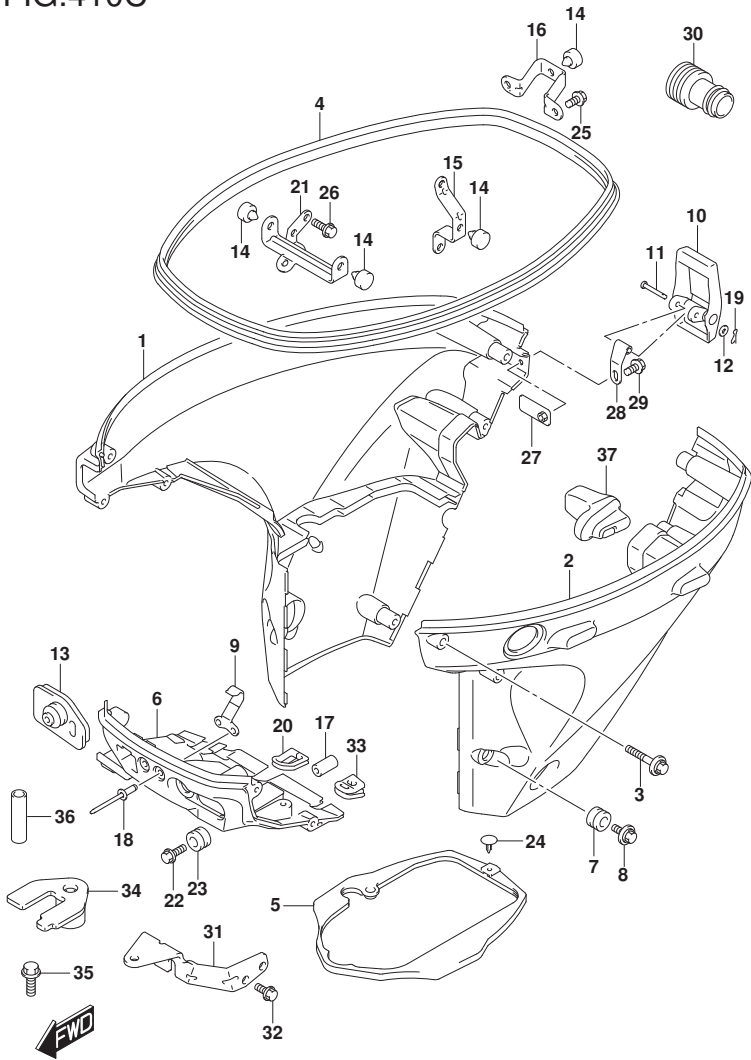


FIG.410C (1-I-8) SIDE COVER (DF25AT,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	61810-94L10-YAY	COVER, SIDE STBD (BLACK)	1	STBD
1-2	61810-94L10-Y5S	COVER, SIDE STBD (WHITE)	1	STBD
2-1	61820-94L20-YAY	COVER, SIDE PORT (BLACK)	1	PORT
2-2	61820-94L20-Y5S	COVER, SIDE PORT (WHITE)	1	PORT
3	09116-06523	BOLT (6X35)	8	
4	61112-94L10	RUBBER, SIDE COVER	1	
5	61134-94L00	SEAL, SIDE COVER	1	
6-1	61830-94L00-YAY	PANEL, FRONT (BLACK)	1	
6-2	61830-94L00-Y5S	PANEL, FRONT (WHITE)	1	
7	09320-11017	CUSHION (11X20X13.5)	2	
8	09116-06522	BOLT (6X17)	2	
9	61412-89L00	HOOK, FR PANEL	1	
10	61610-90L00	FASTENER	1	
11	61616-93EL0	PIN, LEVER	1	
12	09161-04012	WASHER (4.2X11X1)	1	
13	61124-94L10	GROMMET, R/CON CABLE	1	
14	61151-91J11	CUSHION, LOWER COVER HOLDER	4	LOWER
15	61827-94L00	HOLDER, SIDE COVER	1	
16	61829-94L00	HOLDER, SIDE COVER REAR	1	
17	09251-09007	CUSHION	1	
18	09229-04005	RIVET	2	
19	09385-04003	CLIP	1	
20	23131-94L00	BOOT, CLUTCH ROD	1	
21	61841-94L00	HOLDER, SIDE COVER	1	
22	09116-06522	BOLT (6X17)	1	
23	09320-11017	CUSHION (11X20X13.5)	1	
24	09409-05302-5PK	CLIP (BLACK)	1	
25	01550-0616C	BOLT	2	
26	01550-0820C	BOLT	1	
27	61620-94L00	PLATE, FASTENER HOLDER	1	
28	61642-90L00	HOLDER, FASTENER LEVER	1	
29	09116-06223	BOLT (6X12)	1	
30	17917-87L00	CONNECTOR, FLUSH WATER	1	
31	67341-94L00	HOLDER, R/CON CABLE	1	
32	01547-0616C	BOLT	2	
33	36656-94L00	GROMMET, PT CABLE	1	

FIG.410C

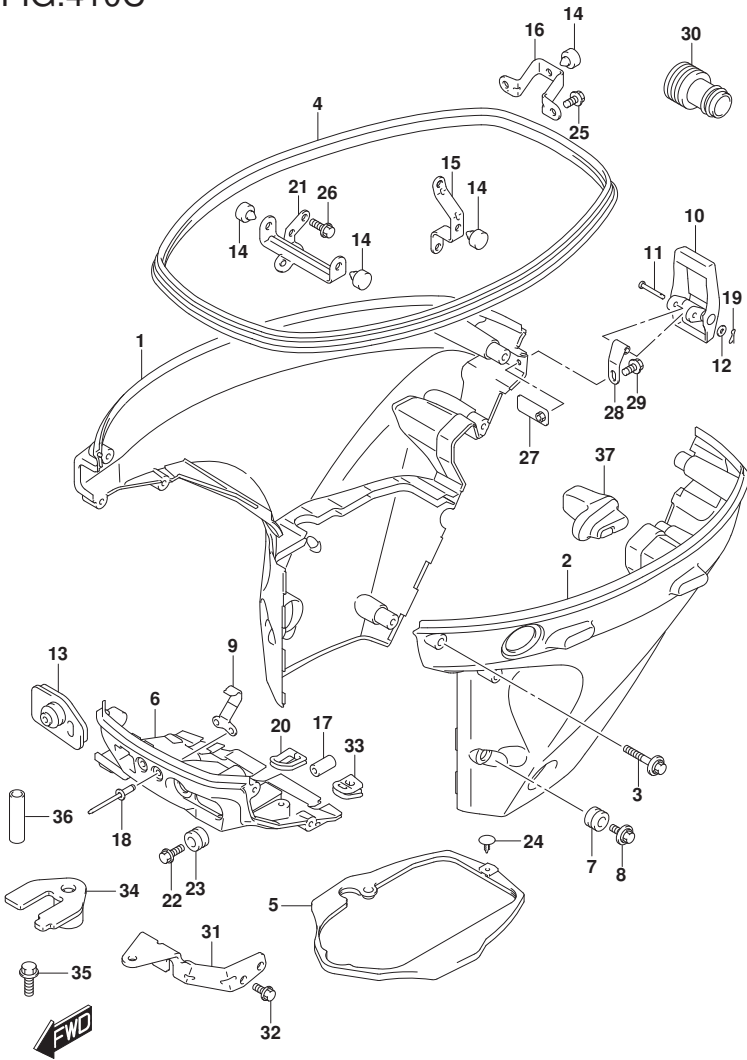


FIG.410C (1-I-9) SIDE COVER (DF25AT,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
34	67343-94L00	STOPPER, R/CON CABLE	1	
35	09116-06225	BOLT (6X16)	1	
36	09352-70104-600	HOSE (7X10.2X600)	2	L:600->14
37	61151-94L00	CUSHION, SIDE COVER	1	

DF25AT P01
DF30AT P01

FIG.410D

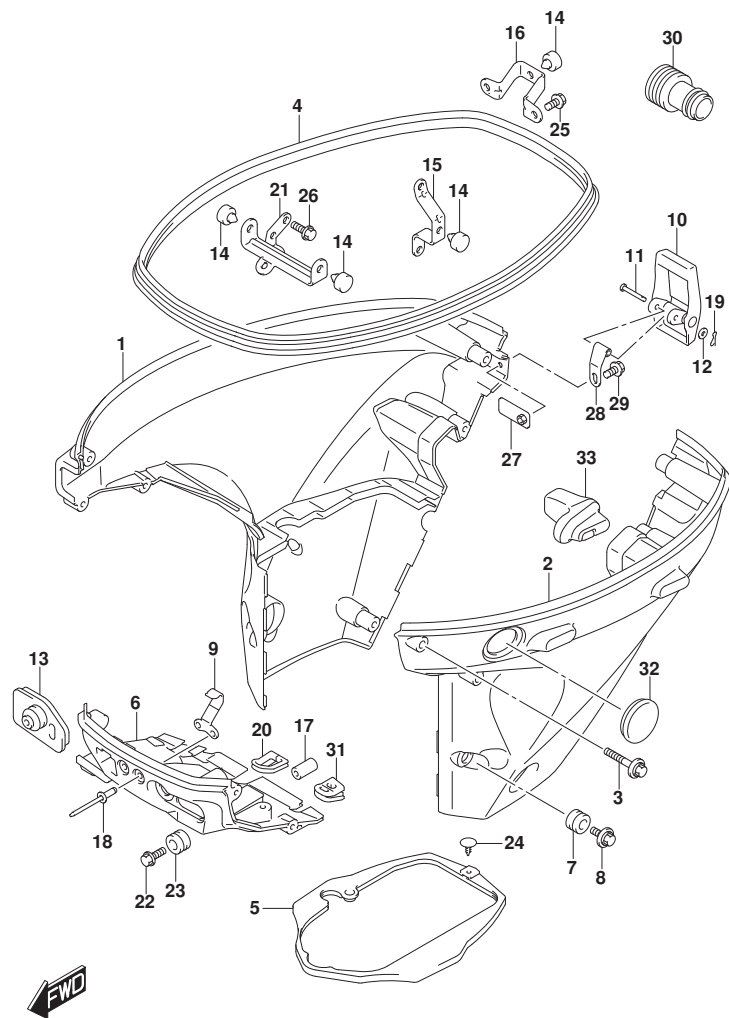


FIG.410D (1-I-10) SIDE COVER (DF25ATH,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	61810-94L10-YAY	COVER, SIDE STBD (BLACK)	1	STBD
1-2	61810-94L10-Y5S	COVER, SIDE STBD (WHITE)	1	STBD
2-1	61820-94L20-YAY	COVER, SIDE PORT (BLACK)	1	PORT
2-2	61820-94L20-Y5S	COVER, SIDE PORT (WHITE)	1	PORT
3	09116-06523	BOLT (6X35)	8	
4	61112-94L10	RUBBER, SIDE COVER	1	
5	61134-94L00	SEAL, SIDE COVER	1	
6-1	61830-94L00-YAY	PANEL, FRONT (BLACK)	1	
6-2	61830-94L00-Y5S	PANEL, FRONT (WHITE)	1	
7	09320-11017	CUSHION (11X20X13.5)	2	
8	09116-06522	BOLT (6X17)	2	
9	61412-89L00	HOOK, FR PANEL	1	
10	61610-90L00	FASTENER	1	
11	61616-93EL0	PIN, LEVER	1	
12	09161-04012	WASHER (4.2X11X1)	1	
13	61124-94L20	GROMMET, CABLE	1	
14	61151-91J11	CUSHION, LOWER COVER HOLDER	4	LOWER
15	61827-94L00	HOLDER, SIDE COVER	1	
16	61829-94L00	HOLDER, SIDE COVER REAR	1	
17	09251-09007	CUSHION	1	
18	09229-04005	RIVET	2	
19	09385-04003	CLIP	1	
20	23131-94L00	BOOT, CLUTCH ROD	1	
21	61841-94L00	HOLDER, SIDE COVER	1	
22	09116-06522	BOLT (6X17)	1	
23	09320-11017	CUSHION (11X20X13.5)	1	
24	09409-05302-5PK	CLIP (BLACK)	1	
25	01550-0616C	BOLT	2	
26	01550-0820C	BOLT	1	
27	61620-94L00	PLATE, FASTENER HOLDER	1	
28	61642-90L00	HOLDER, FASTENER LEVER	1	
29	09116-06223	BOLT (6X12)	1	
30	17917-87L00	CONNECTOR, FLUSH WATER	1	
31	36656-94L00	GROMMET, PT CABLE	1	
32	37853-94L00	PLUG, PT SWITCH HOLE	1	

FIG.410D

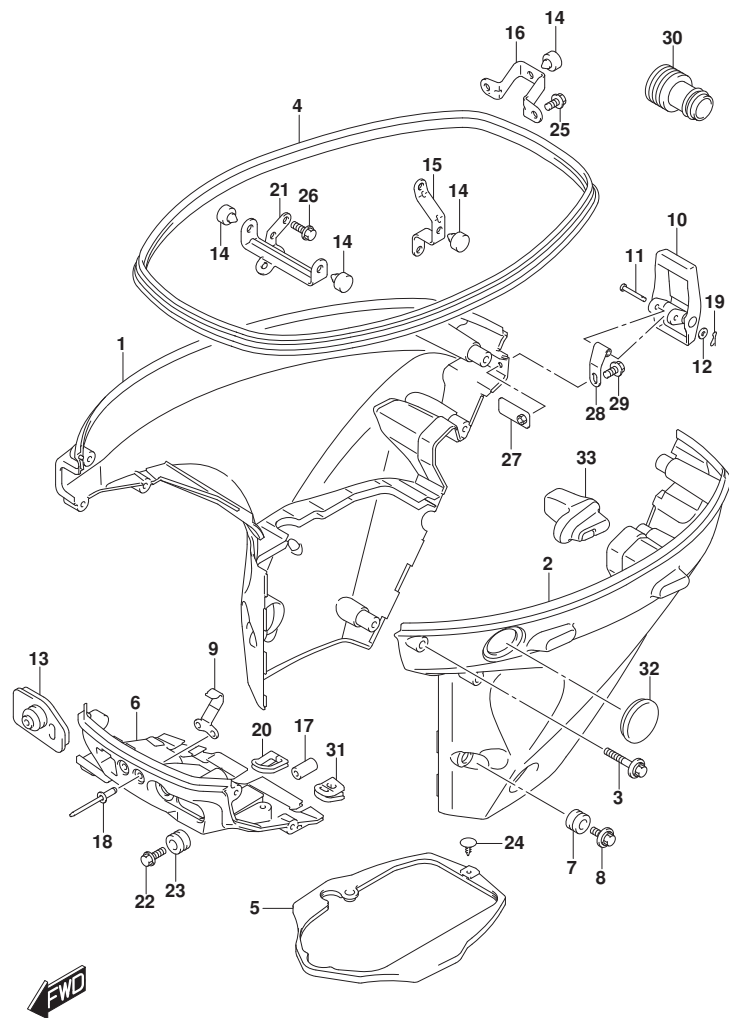


FIG.410D (1-I-11) SIDE COVER (DF25ATH,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
33	61151-94L00	CUSHION, SIDE COVER	1	

DF25ATH P01
DF30ATH P01

FIG.410E

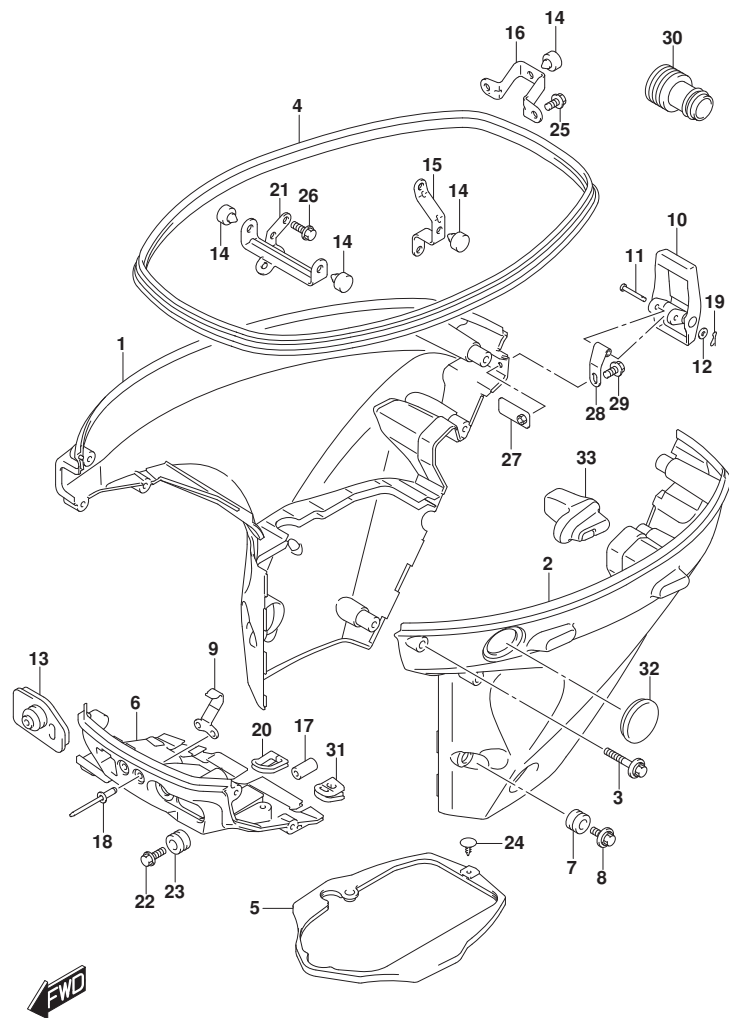


FIG.410E (1-I-12) SIDE COVER (DF30A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	61810-94L10-YAY	COVER, SIDE STBD (BLACK)	1	STBD
1-2	61810-94L10-Y5S	COVER, SIDE STBD (WHITE)	1	STBD
2-1	61820-94L00-YAY	COVER, SIDE PORT (BLACK)	1	PORT
2-2	61820-94L00-Y5S	COVER, SIDE PORT (WHITE)	1	PORT
3	09116-06523	BOLT (6X35)	8	
4	61112-94L10	RUBBER, SIDE COVER	1	
5	61134-94L00	SEAL, SIDE COVER	1	
6-1	61830-94L00-YAY	PANEL, FRONT (BLACK)	1	
6-2	61830-94L00-Y5S	PANEL, FRONT (WHITE)	1	
7	09320-11017	CUSHION (11X20X13.5)	2	
8	09116-06522	BOLT (6X17)	2	
9	61412-89L00	HOOK, FR PANEL	1	
10	61610-90L00	FASTENER	1	
11	61616-93EL0	PIN, LEVER	1	
12	09161-04012	WASHER (4.2X11X1)	1	
13-1	61124-94L00	GROMMET, CABLE	1	W/MANUAL STARTER
13-2	61124-94L20	GROMMET, CABLE	1	W/ELECTRIC STARTER
14	61151-91J11	CUSHION, LOWER COVER HOLDER	4	LOWER
15	61827-94L00	HOLDER, SIDE COVER	1	
16	61829-94L00	HOLDER, SIDE COVER REAR	1	
17	09251-09007	CUSHION	1	
18	09229-04005	RIVET	2	
19	09385-04003	CLIP	1	
20	23131-94L00	BOOT, CLUTCH ROD	1	
21	61841-94L00	HOLDER, SIDE COVER	1	
22	09116-06522	BOLT (6X17)	1	
23	09320-11017	CUSHION (11X20X13.5)	1	
24	09409-05302-5PK	CLIP (BLACK)	1	
25	01550-0616C	BOLT	2	
26	01550-0820C	BOLT	1	
27	61620-94L00	PLATE, FASTENER HOLDER	1	
28	61642-90L00	HOLDER, FASTENER LEVER	1	
29	09116-06223	BOLT (6X12)	1	
30	17917-87L00	CONNECTOR, FLUSH WATER	1	
31	36656-94L00	GROMMET, PT CABLE	1	
32	37853-94L00	PLUG, PT SWITCH HOLE	1	

FIG.410E

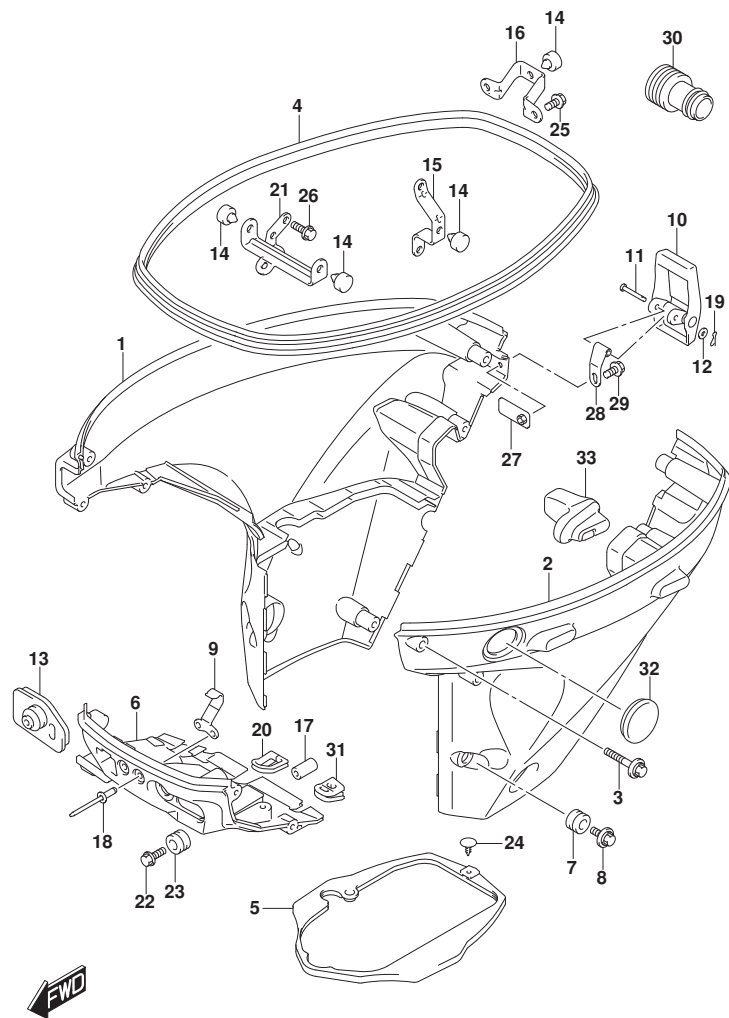


FIG.410E (1-I-13) SIDE COVER (DF30A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
33	61151-94L00	CUSHION, SIDE COVER	1	

DF30A P40

FIG.420A


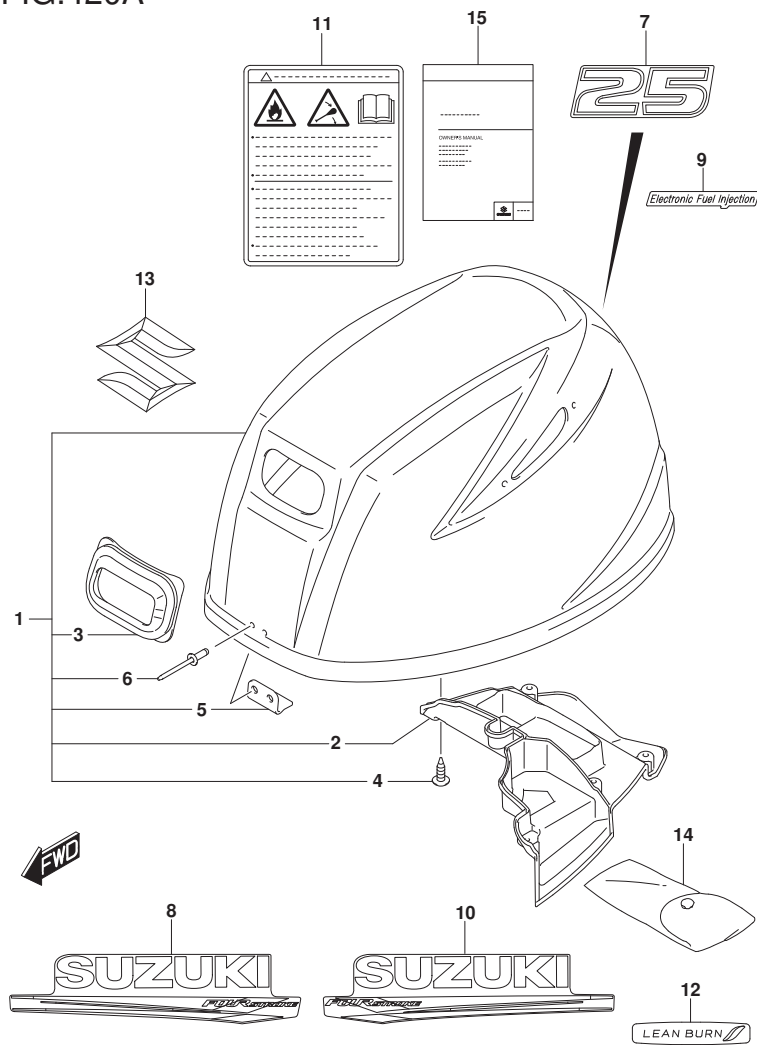


FIG.420A (1-1-14) ENGINE COVER (020:DF25A)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	61400-94L00-YAY	COVER ASSY, ENGINE (BLACK)	1	
2	61433-94L00	.COVER, AIR INTAKE INNER	1	
3	61622-90L00	.OIL SEAL, REC STARTER	1	
4	03542-05169	.SCREW	6	
5	61631-99J00	.HOOK, ENGINE COVER	1	
6	09229-04005	.RIVET	2	
7	61435-94L20-YAY	MARK, EMBLEM REAR (BLACK)	1	
8	61443-94L10-YAY	STRIPE, ENGINE COVER STBD (BLACK)	1	STBD
9	61446-89L10-YAY	DECAL, EFI (BLACK)	1	
10	61453-94L10-YAY	STRIPE, ENGINE COVER PORT (BLACK)	1	PORT
11	61458-89L30	LABEL, ENGINE COVER	1	
12	61471-89L00	DECAL, LEAN BURN	1	
13	77811-58J10-0PG	EMBLEM, MARK S (CHROME)	1	
14	59800-94L10	TOOL ASSY	1	
15	99011-94L80-055	MANUAL, OWNER'S	1	

DF25A P01

FIG.420B (1-J-2) ENGINE COVER (020:(DF25AT,DF25ATH))

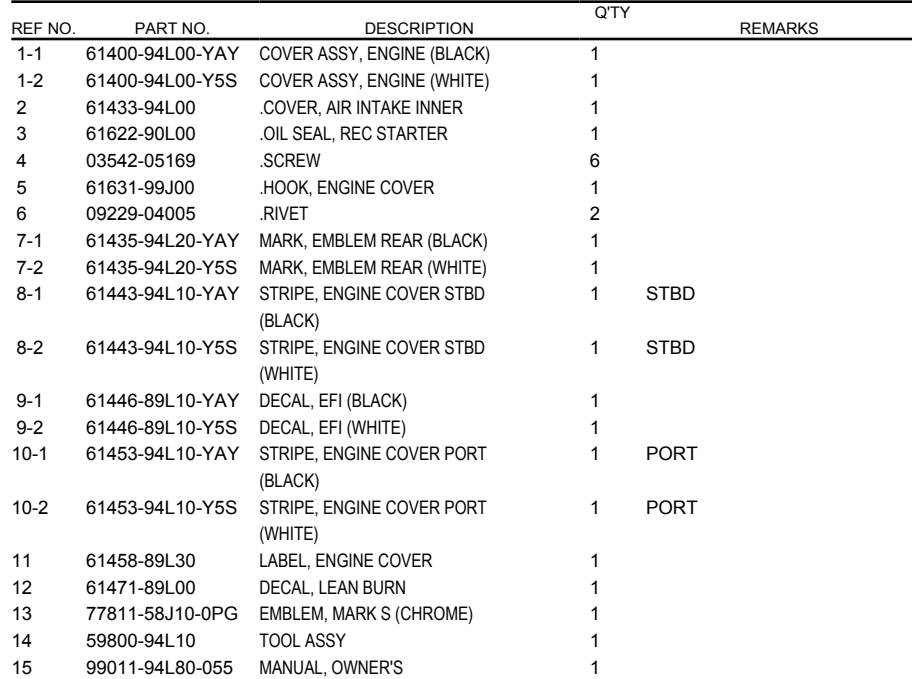

DF25A_30A_P01_022

FIG.420C

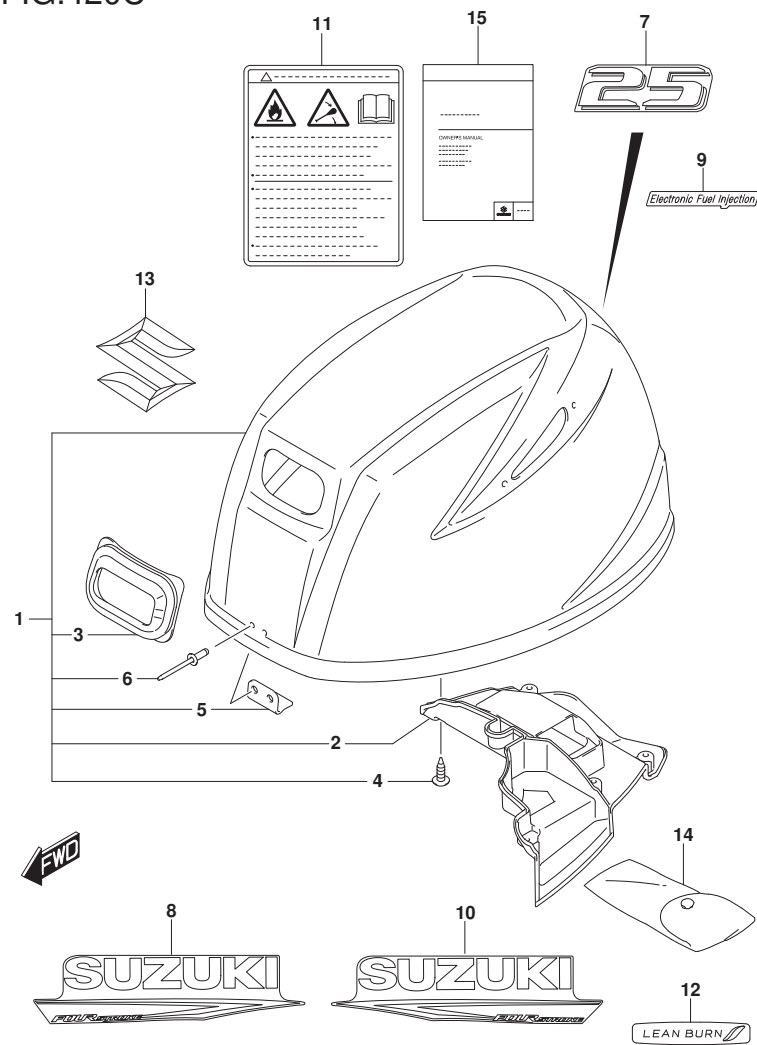


FIG.420C (1-J-3) ENGINE COVER (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	61400-94L10-YAY	COVER ASSY, ENGINE (BLACK)	1	
2	61433-94L10	.COVER, AIR INTAKE INNER	1	
3	61622-90L00	.OIL SEAL, REC STARTER	1	
4	03542-05169	.SCREW	6	
5	61631-99J00	.HOOK, ENGINE COVER	1	
6	09229-04005	.RIVET	2	
7	61435-94L40-YAY	MARK, EMBLEM REAR (BLACK)	1	
8	61443-89L00-YAY	STRIPE, ENGINE COVER STBD (BLACK)	1	STBD
9	61446-89L10-YAY	DECAL, EFI (BLACK)	1	
10	61453-89L00-YAY	STRIPE, ENGINE COVER PORT (BLACK)	1	PORT
11	61458-89L30	LABEL, ENGINE COVER	1	
12	61471-89L00	DECAL, LEAN BURN	1	
13	77811-58J10-0PG	EMBLEM, MARK S (CHROME)	1	
14	59800-94L10	TOOL ASSY	1	
15	99011-94LA0-055	MANUAL, OWNER'S	1	

NOTE : 021:(DF25A,DF25AR,DF25AT,DF25ATH)

DF25A P01
DF25AR P01
DF25AT P01
DF25ATH P01

FIG.420D


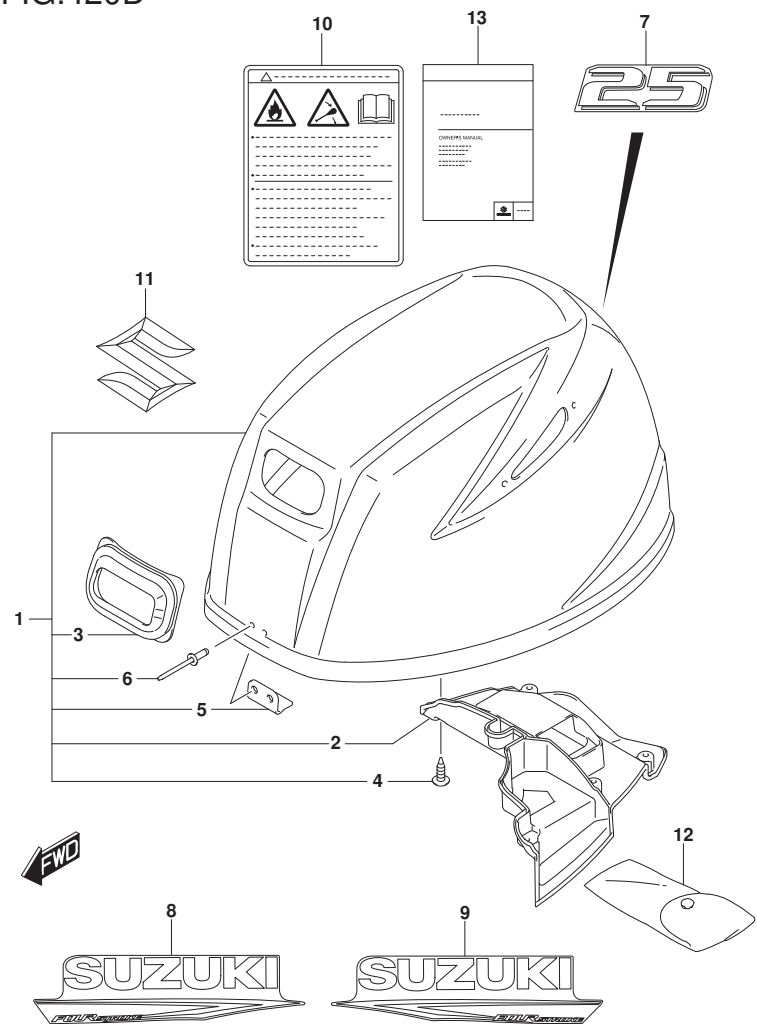


FIG.420D (1-J-4) ENGINE COVER (022:(DF25A,DF25AT,DF25ATH))

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	61400-94L10-YAY	COVER ASSY, ENGINE (BLACK)	1	
2	61433-94L10	.COVER, AIR INTAKE INNER	1	
3	61622-90L00	.OIL SEAL, REC STARTER	1	
4	03542-05169	.SCREW	6	
5	61631-99J00	.HOOK, ENGINE COVER	1	
6	09229-04005	.RIVET	2	
7	61435-94L40-YAY	MARK, EMBLEM REAR (BLACK)	1	
8	61443-89L00-YAY	STRIPE, ENGINE COVER STBD (BLACK)	1	STBD
9	61453-89L00-YAY	STRIPE, ENGINE COVER PORT (BLACK)	1	PORT
10	61458-89L30	LABEL, ENGINE COVER	1	
11	77811-58J10-OPG	EMBLEM, MARK S (CHROME)	1	
12	59800-94L10	TOOL ASSY	1	
13	99011-94LC0-055	MANUAL, OWNER'S	1	

DF25A P01
DF25AT P01
DF25ATH P01

FIG.420E (1-J-5) ENGINE COVER (020:DF30A)

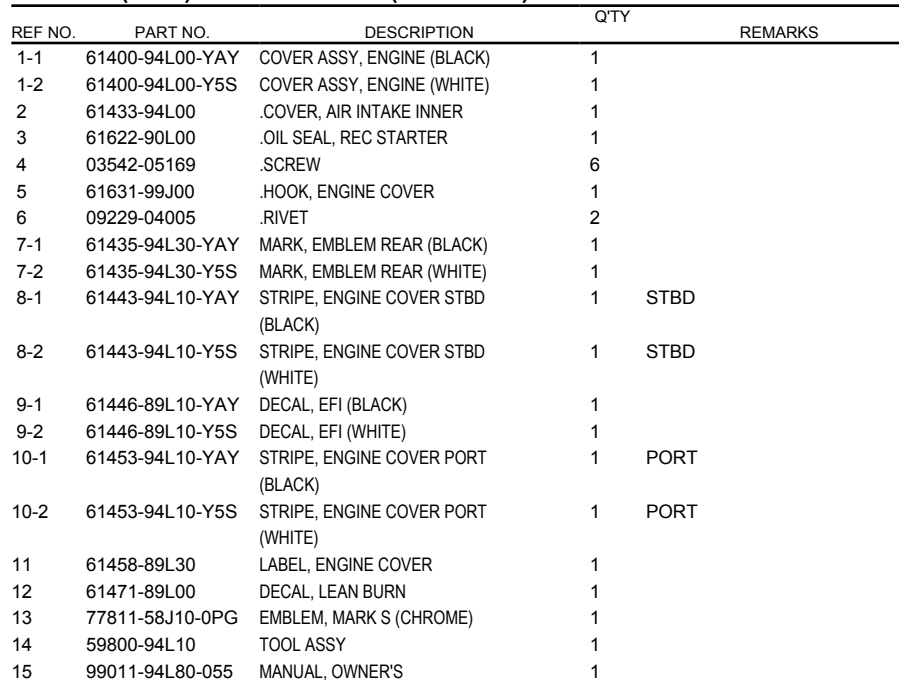

DF25A_30A_P01_022

FIG.420F

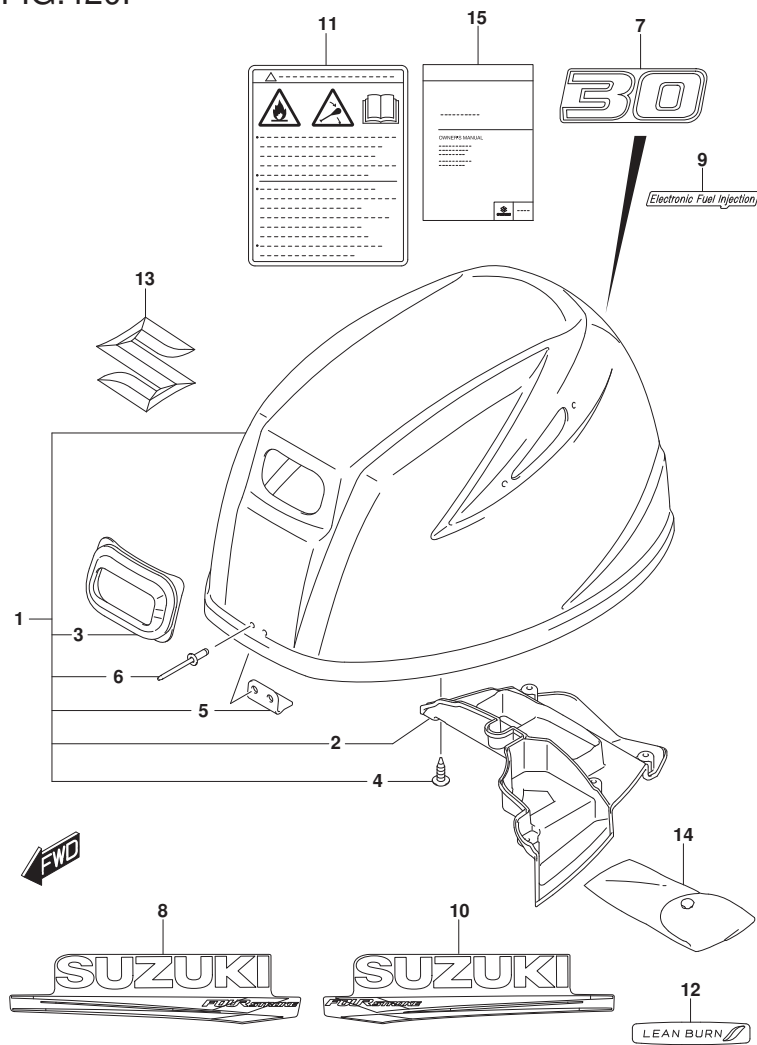


FIG.420F (1-J-6) ENGINE COVER (020:(DF30AR,DF30AQ))

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	61400-94L00-YAY	COVER ASSY, ENGINE (BLACK)	1	
2	61433-94L00	.COVER, AIR INTAKE INNER	1	
3	61622-90L00	.OIL SEAL, REC STARTER	1	
4	03542-05169	.SCREW	6	
5	61631-99J00	.HOOK, ENGINE COVER	1	
6	09229-04005	.RIVET	2	
7	61435-94L30-YAY	MARK, EMBLEM REAR (BLACK)	1	
8	61443-94L10-YAY	STRIPE, ENGINE COVER STBD (BLACK)	1	STBD
9	61446-89L10-YAY	DECAL, EFI (BLACK)	1	
10	61453-94L10-YAY	STRIPE, ENGINE COVER PORT (BLACK)	1	PORT
11	61458-89L30	LABEL, ENGINE COVER	1	
12	61471-89L00	DECAL, LEAN BURN	1	
13	77811-58J10-0PG	EMBLEM, MARK S (CHROME)	1	
14	59800-94L10	TOOL ASSY	1	
15	99011-94L80-055	MANUAL, OWNER'S	1	

DF30AQ P01
DF30AR P01

FIG.420G

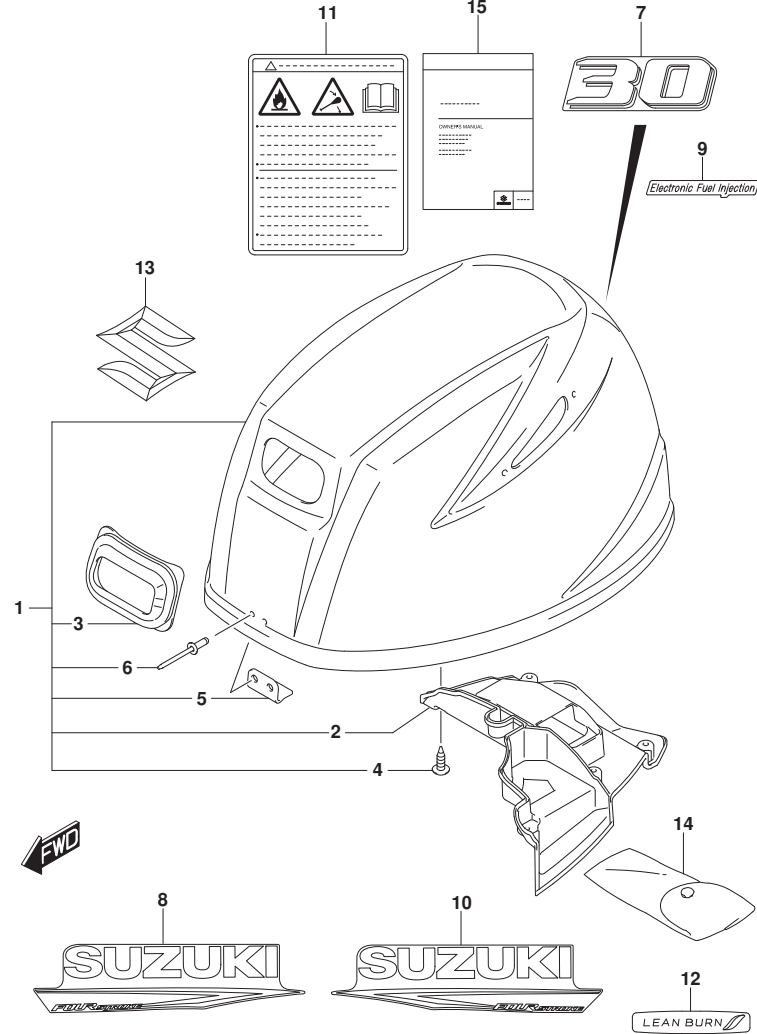


FIG.420G (1-J-7) ENGINE COVER (020:(DF30AT,DF30ATH))

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	61400-94L00-YAY	COVER ASSY, ENGINE (BLACK)	1	
1-2	61400-94L00-Y5S	COVER ASSY, ENGINE (WHITE)	1	
2	61433-94L00	.COVER, AIR INTAKE INNER	1	
3	61622-90L00	.OIL SEAL, REC STARTER	1	
4	03542-05169	.SCREW	6	
5	61631-99J00	.HOOK, ENGINE COVER	1	
6	09229-04005	.RIVET	2	
7-1	61435-94L30-YAY	MARK, EMBLEM REAR (BLACK)	1	
7-2	61435-94L30-Y5S	MARK, EMBLEM REAR (WHITE)	1	
8-1	61443-94L10-YAY	STRIPE, ENGINE COVER STBD (BLACK)	1	STBD
8-2	61443-94L10-Y5S	STRIPE, ENGINE COVER STBD (WHITE)	1	STBD
9-1	61446-89L10-YAY	DECAL, EFI (BLACK)	1	
9-2	61446-89L10-Y5S	DECAL, EFI (WHITE)	1	
10-1	61453-94L10-YAY	STRIPE, ENGINE COVER PORT (BLACK)	1	PORT
10-2	61453-94L10-Y5S	STRIPE, ENGINE COVER PORT (WHITE)	1	PORT
11	61458-89L30	LABEL, ENGINE COVER	1	
12	61471-89L00	DECAL, LEAN BURN	1	
13	77811-58J10-0PG	EMBLEM, MARK S (CHROME)	1	
14	59800-94L10	TOOL ASSY	1	
15	99011-94L80-055	MANUAL, OWNER'S	1	

DF30AT P01
DF30ATH P01

FIG.420H

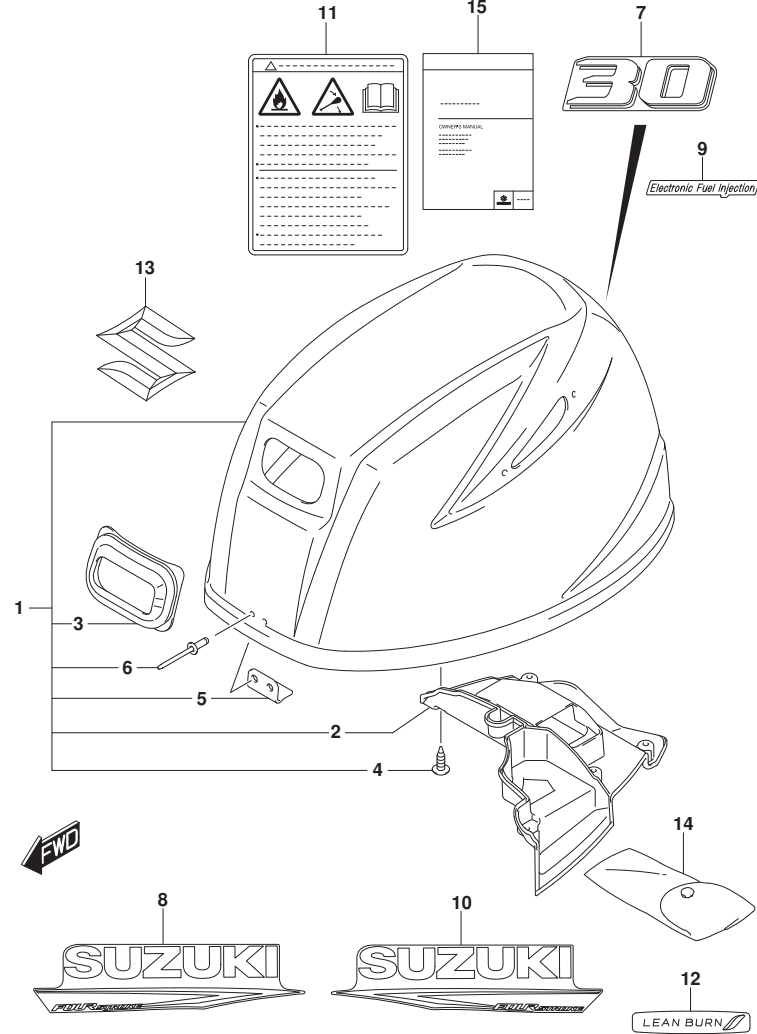


FIG.420H (1-J-8) ENGINE COVER (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	61400-94L10-YAY	COVER ASSY, ENGINE (BLACK)	1	
2	61433-94L10	.COVER, AIR INTAKE INNER	1	
3	61622-90L00	.OIL SEAL, REC STARTER	1	
4	03542-05169	.SCREW	6	
5	61631-99J00	.HOOK, ENGINE COVER	1	
6	09229-04005	.RIVET	2	
7	61435-94L50-YAY	MARK, EMBLEM REAR (BLACK)	1	
8	61443-89L00-YAY	STRIPE, ENGINE COVER STBD (BLACK)	1	STBD
9	61446-89L10-YAY	DECAL, EFI (BLACK)	1	
10	61453-89L00-YAY	STRIPE, ENGINE COVER PORT (BLACK)	1	PORT
11	61458-89L30	LABEL, ENGINE COVER	1	
12	61471-89L00	DECAL, LEAN BURN	1	
13	77811-58J10-0PG	EMBLEM, MARK S (CHROME)	1	
14	59800-94L10	TOOL ASSY	1	
15	99011-94LA0-055	MANUAL, OWNER'S	1	

NOTE : 021:(DF30A,DF30AR,DF30AQ,DF30AT,DF30ATH)

DF30A P40
DF30AQ P01
DF30AR P01
DF30AT P01
DF30ATH P01

FIG.420J

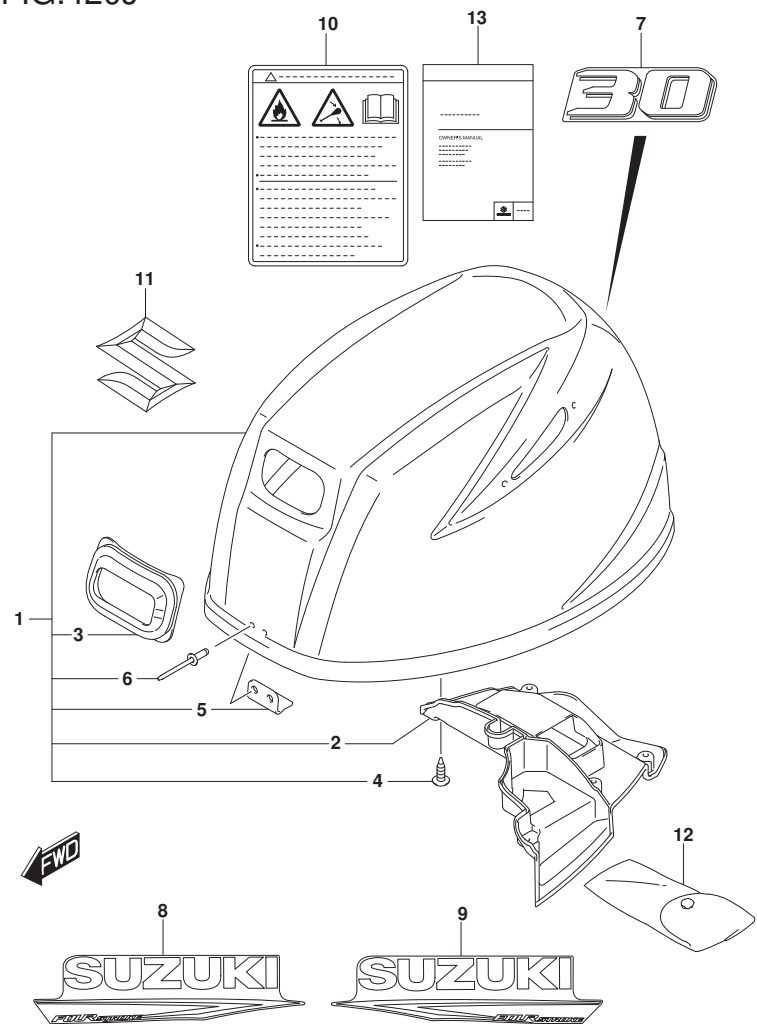


FIG.420J (1-J-9) ENGINE COVER (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	61400-94L10-YAY	COVER ASSY, ENGINE (BLACK)	1	
2	61433-94L10	.COVER, AIR INTAKE INNER	1	
3	61622-90L00	.OIL SEAL, REC STARTER	1	
4	03542-05169	.SCREW	6	
5	61631-99J00	.HOOK, ENGINE COVER	1	
6	09229-04005	.RIVET	2	
7	61435-94L50-YAY	MARK, EMBLEM REAR (BLACK)	1	
8	61443-89L00-YAY	STRIPE, ENGINE COVER STBD (BLACK)	1	STBD
9	61453-89L00-YAY	STRIPE, ENGINE COVER PORT (BLACK)	1	PORT
10	61458-89L30	LABEL, ENGINE COVER	1	
11	77811-58J10-OPG	EMBLEM, MARK S (CHROME)	1	
12	59800-94L10	TOOL ASSY	1	
13	99011-94LC0-055	MANUAL, OWNER'S	1	

NOTE : 022:(DF30A,DF30AR,DF30AQ,DF30AT,DF30ATH)

- DF30A P40
- DF30AQ P01
- DF30AR P01
- DF30AT P01
- DF30ATH P01

FIG.432A


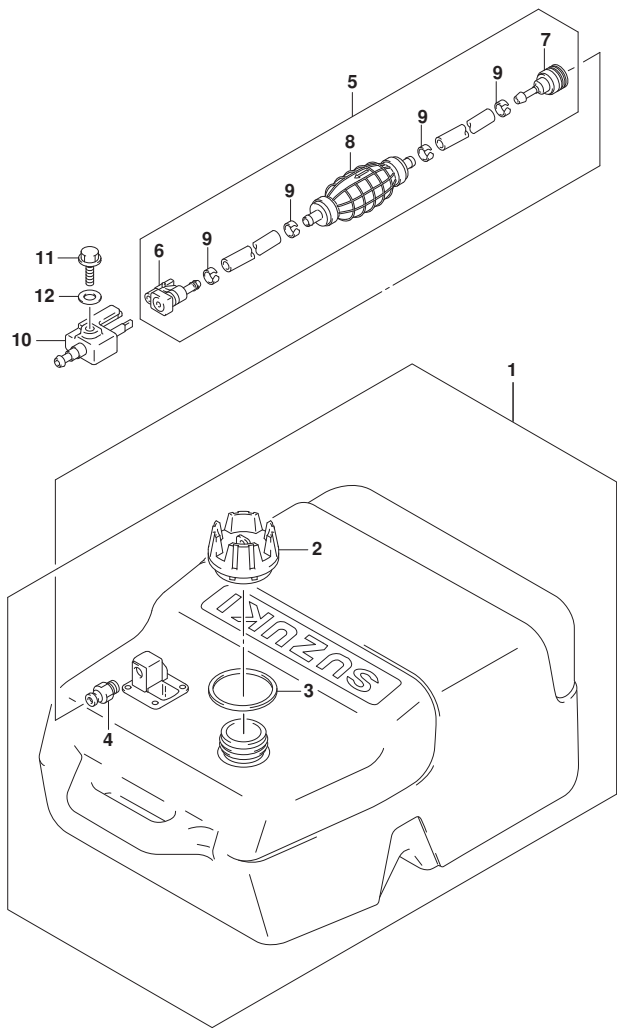


FIG.432A (1-J-10) FUEL TANK

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	65000-94L10	TANK ASSY, FUEL (25L)	1	
2	65520-99100	.CAP ASSY, FUEL TANK	1	
3	65561-95D00	.GASKET, TANK CAP	1	
4	65740-95D01	.PLUG, FUEL CONNECTOR	1	
5	65700-89L32	HOSE, FUEL	1	TANK TO CONN
6	65750-87J11	.SOCKET, FUEL HOSE	1	
7	65750-955L1	.SOCKET, FUEL HOSE	1	
8	65770-89L00	.PUMP, SQUEEZE	1	
9	65781-98500	.CLIP, FUEL HOSE	4	
10	65720-986L0	PLUG, FUEL CONNECTOR	1	
11	09103-06237	BOLT (6X12.5)	1	
12	09160-06175	WASHER (6.5X15X1)	1	

FIG.442A

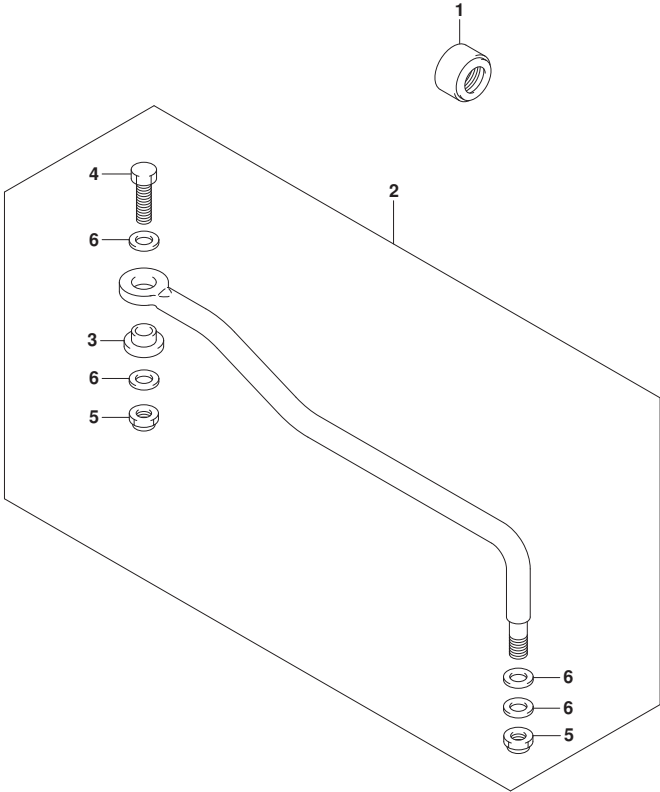

DF25A_30A_P01_022_442A
DRAG LINK

FIG.442A (1-J-11) DRAG LINK (DF25AT,DF30AR,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	41161-94400	SEAL, STEERING CABLE	1	
2	67701-94L00	LINK ASSY, DRAG	1	
3	67721-94L00	.SPACER	1	
4	67725-96J00	.BOLT, DRAG LINK	1	
5	67726-99E00	.NUT, LOCK	2	
6	67728-99E00	.WASHER	4	

DF25AT P01
DF30AR P01
DF30AT P01

FIG.444A

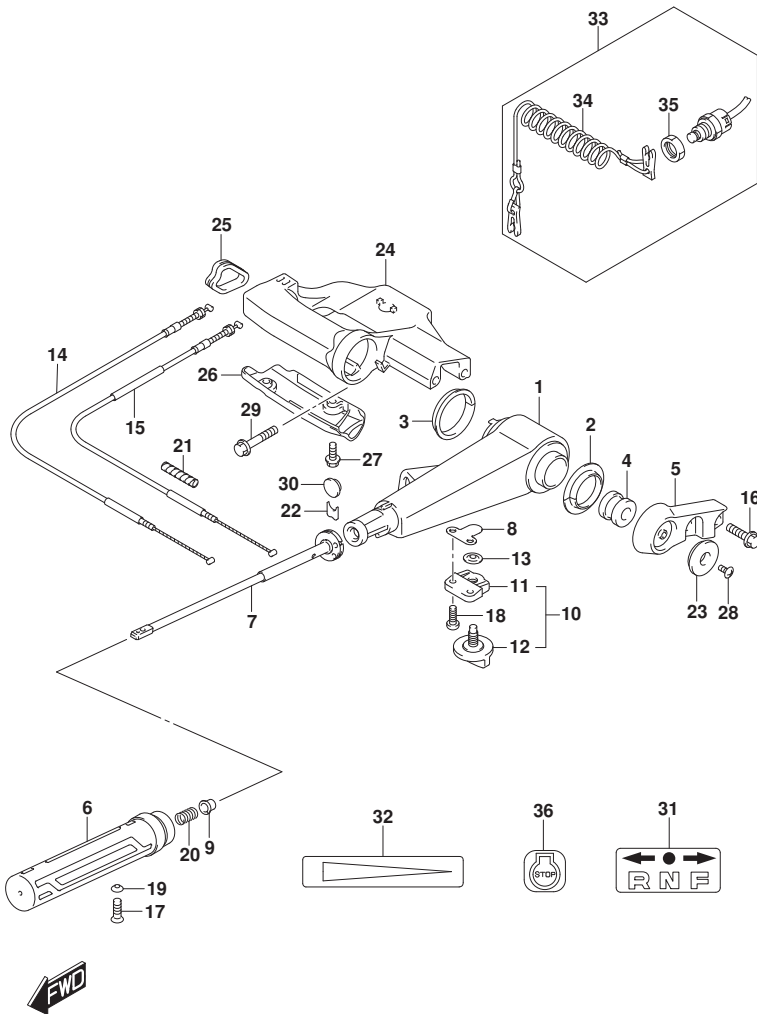


FIG.444A (1-J-12) TILLER HANDLE (DF25A,DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	63111-89L01-YAY	HANDLE, TILLER (BLACK)	1	
2	63115-99J10	BUSH, TILLER HANDLE NO.1	1	
3	63115-99J00	BUSH, TILLER HANDLE NO.2	1	
4	63116-99J00	RUBBER, TILLER HANDLE FRICTION	1	
5	63121-99J00-YAY	COVER, TILLER HANDLE (BLACK)	1	
6	63210-94L01	GRIP, HANDLE	1	
7	63220-94L00	ROD, HANDLE	1	
8	63225-98601	PLATE, THROTTLE ADJ	1	
9	63225-93200	BUSH, HANDLE ROD	1	
10	63240-94J20	ADJUSTER SET, HANDLE ROD	1	
11	63241-986C0	.SUPPORT, HANDLE ROD	1	
12	63244-94J10	.KNOB, THROTTLE ADJ	1	
13	09148-06008	NUT (M6)	1	
14	63610-94L00	CABLE ASSY, THROTTLE NO.1	1	
15	63650-94L00	CABLE ASSY, THROTTLE NO.2	1	
16	09116-08151	BOLT (8X30)	2	
17-1	09126-06015	SCREW (6X23)	1	020,021
17-2	09126-06027	SCREW	1	022
18	09136-05041	SCREW (5X20)	2	
19	09163-06001	LOCK WASHER (6.4X12X0.5)	1	
20	09440-12027	SPRING	1	
21	33833-91J00	TUBE, SWITCH LEAD (L:250)	1	
22	63114-99J01	PLATE, WARNING INDICATOR	1	
23	63122-99J00	PROTECTOR, HANDLE COVER	1	
24	63131-94L00-YAY	BRACKET, TILLER HANDLE (BLACK)	1	
25	63133-89L00	GROMMET, TILLER HANDLE BRACKET	1	
26	63134-94L00	COVER, TILLER HANDLE BRACKET	1	
27	09136-05041	SCREW (5X20)	2	
28	09125-05145	SCREW (5X10)	1	
29	09116-08155	BOLT (8X45)	2	
30	09250-12016	CAP (OD:20)	1	
31	21131-94J00-YAY	MARK, CLUTCH SHIFT (BLACK)	1	
32	63215-93110	MARK, HANDLE GRIP	1	
33	37830-94J11	SWITCH ASSY, EMERGENCY & STOP	1	
34	37823-97J00	.PLATE, LOCK	1	
35	37826-97J01	.NUT, EMERGENCY SWITCH	1	

FIG.444A

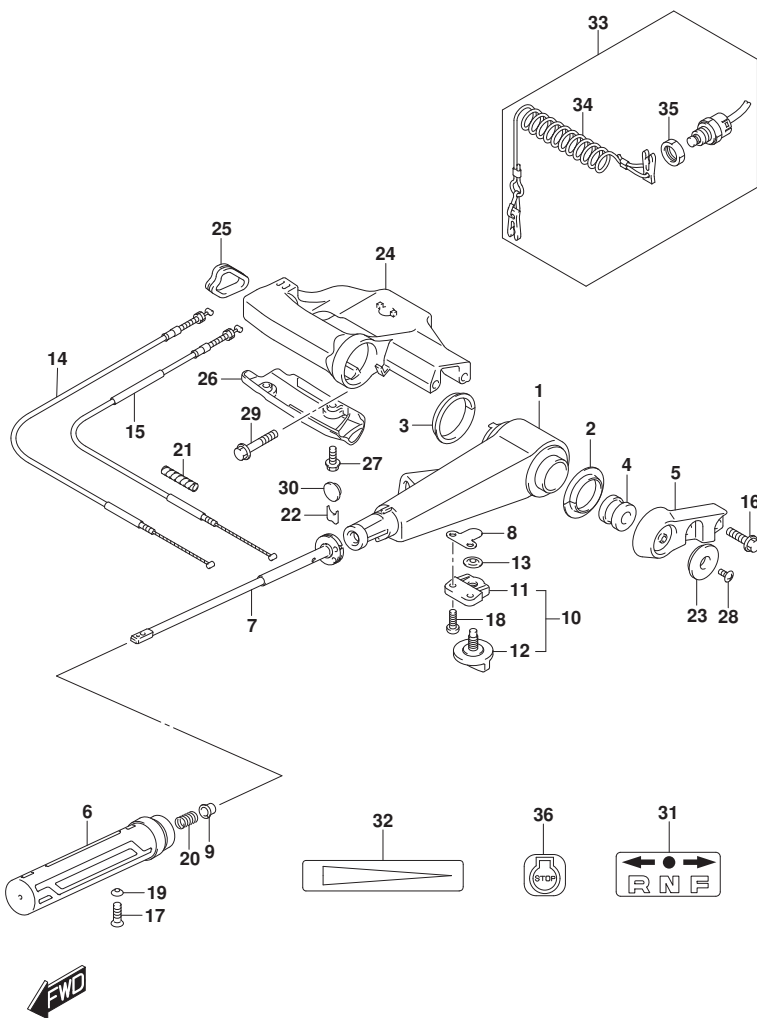


FIG.444A (1-J-13) TILLER HANDLE (DF25A,DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
36	37835-91J00-YAY	LABEL, STOP (BLACK)	1	

DF25A P01
DF30AQ P01

FIG.444B

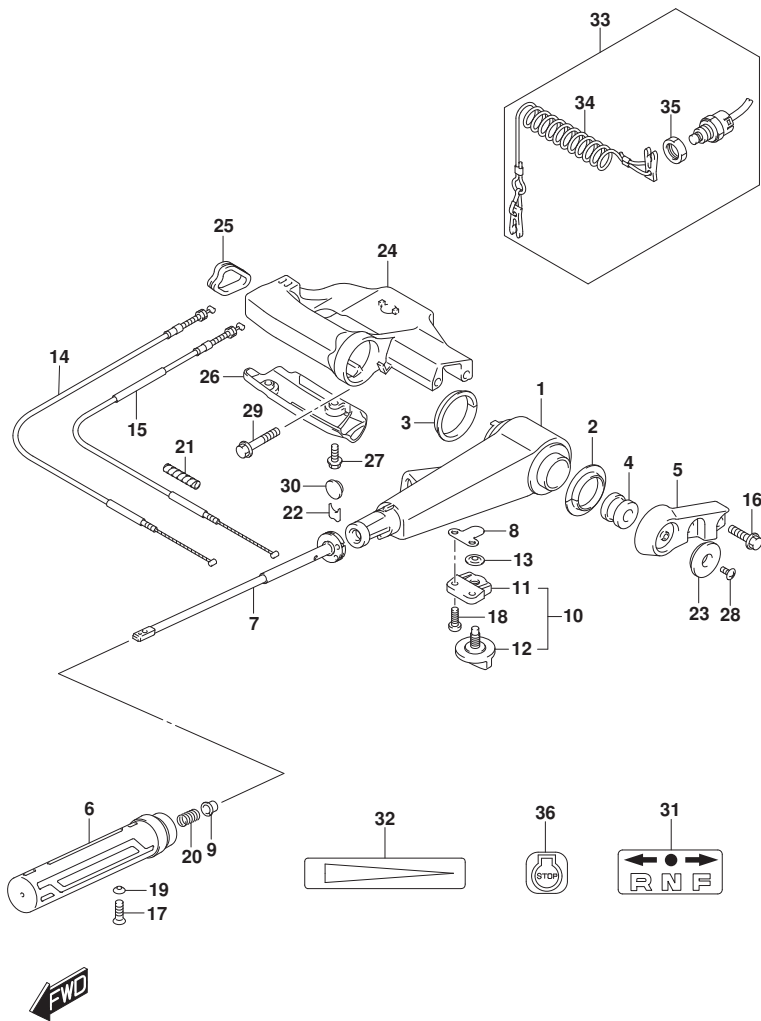


FIG.444B (1-J-14) TILLER HANDLE (DF25ATH,DF30A,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	63111-89L01-YAY	HANDLE, TILLER (BLACK)	1	
1-2	63111-89L01-Y5S	HANDLE, TILLER (WHITE)	1	
2	63115-99J10	BUSH, TILLER HANDLE NO.1	1	
3	63115-99J00	BUSH, TILLER HANDLE NO.2	1	
4	63116-99J00	RUBBER, TILLER HANDLE FRICTION	1	
5-1	63121-99J00-YAY	COVER, TILLER HANDLE (BLACK)	1	
5-2	63121-99J00-Y5S	COVER, TILLER HANDLE (WHITE)	1	
6	63210-94L01	GRIP, HANDLE	1	
7	63220-94L00	ROD, HANDLE	1	
8	63225-98601	PLATE, THROTTLE ADJ	1	
9	63225-93200	BUSH, HANDLE ROD	1	
10	63240-94J20	ADJUSTER SET, HANDLE ROD	1	
11	63241-986C0	.SUPPORT, HANDLE ROD	1	
12	63244-94J10	.KNOB, THROTTLE ADJ	1	
13	09148-06008	NUT (M6)	1	
14	63610-94L00	CABLE ASSY, THROTTLE NO.1	1	
15	63650-94L00	CABLE ASSY, THROTTLE NO.2	1	
16	09116-08151	BOLT (8X30)	2	
17-1	09126-06015	SCREW (6X23)	1	020,021
17-2	09126-06027	SCREW	1	022
18	09136-05041	SCREW (5X20)	2	
19	09163-06001	LOCK WASHER (6.4X12X0.5)	1	
20	09440-12027	SPRING	1	
21	33833-91J00	TUBE, SWITCH LEAD (L:250)	1	
22	63114-99J01	PLATE, WARNING INDICATOR	1	
23	63122-99J00	PROTECTOR, HANDLE COVER	1	
24-1	63131-94L00-YAY	BRACKET, TILLER HANDLE (BLACK)	1	
24-2	63131-94L00-Y5S	BRACKET, TILLER HANDLE (WHITE)	1	
25	63133-89L00	GROMMET, TILLER HANDLE BRACKET	1	
26	63134-94L00	COVER, TILLER HANDLE BRACKET	1	
27	09136-05041	SCREW (5X20)	2	
28	09125-05145	SCREW (5X10)	1	
29	09116-08155	BOLT (8X45)	2	
30	09250-12016	CAP (OD:20)	1	
31-1	21131-94J00-YAY	MARK, CLUTCH SHIFT (BLACK)	1	
31-2	21131-94J00-Y5S	MARK, CLUTCH SHIFT (WHITE)	1	

FIG.444B

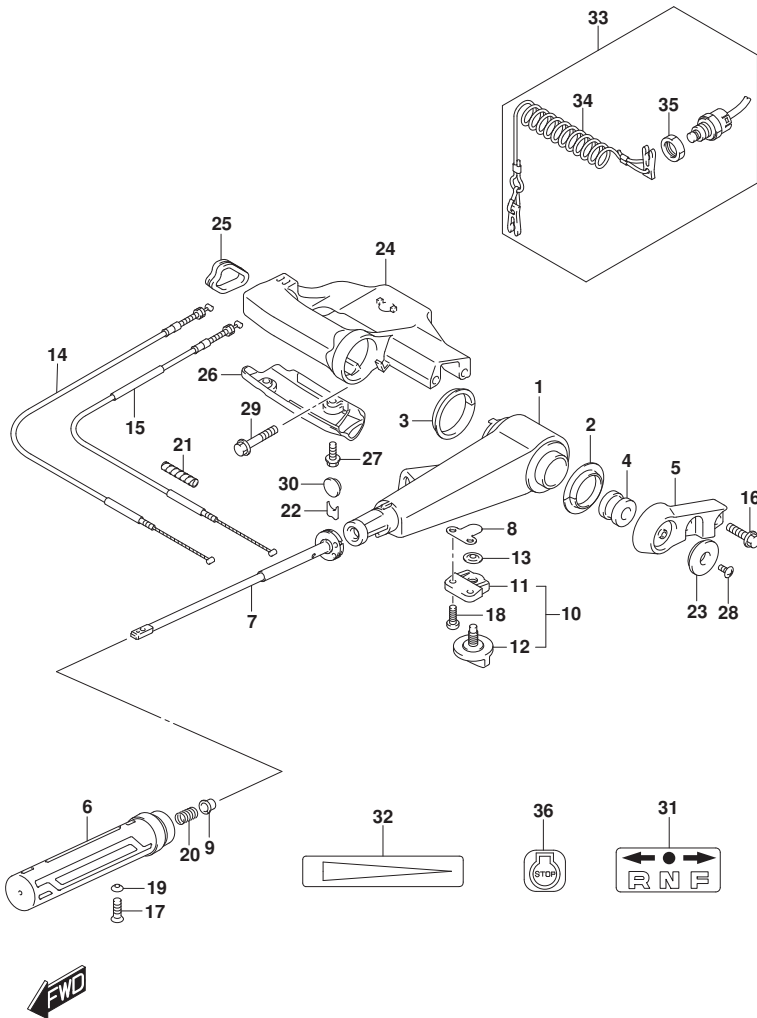


FIG.444B (1-J-15) TILLER HANDLE (DF25ATH,DF30A,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
32	63215-93110	MARK, HANDLE GRIP	1	
33	37830-94J11	SWITCH ASSY, EMERGENCY & STOP	1	
34	37823-97J00	.PLATE, LOCK	1	
35	37826-97J01	.NUT, EMERGENCY SWITCH	1	
36-1	37835-91J00-YAY	LABEL, STOP (BLACK)	1	
36-2	37835-91J00-Y5S	LABEL, STOP (WHITE)	1	

DF25ATH P01
DF30A P40
DF30ATH P01


FIG.450A

This is a detailed exploded view diagram of a mechanical assembly, likely a vehicle's interior lighting or control unit. The diagram shows various components and their assembly relationships, indicated by dashed lines. The parts are numbered as follows:

- 1: Main housing or frame
- 2: Small bracket or clip
- 3: Cable or connector
- 4: Small pin or clip
- 5: Small cap or plug
- 6: Connector or plug
- 7: Cable or connector
- 8: Spring or coiled wire
- 9: Small component, possibly a switch or sensor
- 10: Small bracket or clip
- 11: Circular component, possibly a lens or cover
- 12: Small pin or clip
- 13: Small washer or spacer
- 14: Small bracket or clip
- 15: Small pin or clip
- 16: Small bracket or clip
- 17: Small washer or spacer
- 18: Circular component, possibly a lens or cover
- 19: Small bracket or clip
- 20: Small bracket or clip
- 21: Small bracket or clip
- 22: Small bracket or clip
- 23: Small bracket or clip
- 24: Small bracket or clip
- 25: Small bracket or clip
- 26: Small bracket or clip
- 27: Small bracket or clip
- 28: Small bracket or clip
- 29: Small bracket or clip
- 30: Small bracket or clip
- 31: Small bracket or clip
- 32: Small bracket or clip
- 33: Small bracket or clip
- 34: Small bracket or clip
- 35: Small bracket or clip
- 36: Small bracket or clip
- 37: Small bracket or clip
- 38: Small bracket or clip
- 39: Small bracket or clip
- 40: Small bracket or clip
- 41: Small bracket or clip
- 42: Small bracket or clip
- 43: Small bracket or clip
- 44: Small bracket or clip
- 45: Small bracket or clip
- 46: Small bracket or clip
- 47: Small bracket or clip
- 48: Small bracket or clip
- 49: Small bracket or clip
- 50: Small bracket or clip
- 51: Small bracket or clip
- 52: Cable or connector
- 53: Cable or connector

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-94J33	REMOTE CONTROL ASSY	1	
2	36628-91J00	.GROMMET, WIRING HARNESS	1	
3	37110-94J03	.SWITCH ASSY, IGNITION	1	
4-1	37141-99E00	..KEY (931)	2	
4-2	37141-99E10	..KEY (932)	2	
4-3	37141-99E20	..KEY (933)	2	
4-4	37141-99E30	..KEY (934)	2	
4-5	37141-99E40	..KEY (935)	2	
4-6	37141-99E50	..KEY (936)	2	
4-7	37141-99E60	..KEY (937)	2	
4-8	37141-99E70	..KEY (938)	2	
4-9	37141-99E80	..KEY (939)	2	
4-10	37141-99E90	..KEY (940)	2	
4-11	37141-99EA0	..KEY (941)	2	
4-12	37141-99EB0	..KEY (942)	2	
5	37143-99E01	..CAP, KEY	2	
6	37149-93J00	..CAP, CYLINDER BODY	1	
7	37820-93J11	.SWITCH ASSY, EMERGENCY	1	
8	37823-92E02	..PLATE ASSY, EMERGENCY SW LOCK	1	
9	37826-92J10	..NUT	1	
10	67263-88L30	.CAP, GRIP SW HOLE	1	
11	38500-93J90	.BUZZER, WARNING	1	
12	67214-92E00	.SCREW (5X20)	1	
13	67212-95600	.WASHER	1	
14	67220-95630	.PLATE ASSY	1	
15	67223-99E10	.KNOB, BRAKE ADJUST	1	
16	67229-95600	.ROLLER	1	
17	67232-95600	.BUSH	1	
18	67238-87D00	.GEAR, DRIVE	1	
19	67241-99E11	.LEVER, FREE THROTTLE	1	
20	67243-95600	.BUSH	1	
21	67244-95600	.WAVE WASHER	1	
22	67245-95600	.DRUM, FREE THROTTLE	1	
23	67251-96L00	.LEVER, HANDLE	1	
24	67252-95600	.BUSH	2	

FIG.450A

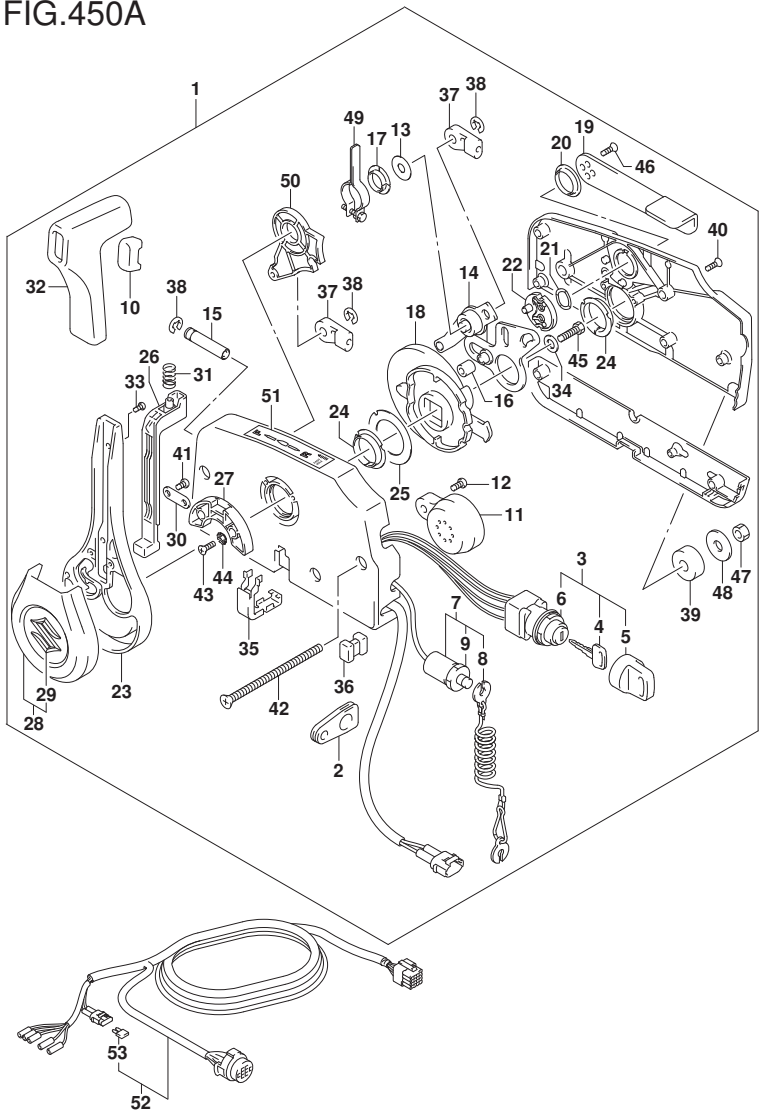

DF25A_30A_P01_022_450A
REMOTE CONTROL

FIG.450A (1-K-3) REMOTE CONTROL (DF25AR:021,DF30AR:(020,021))

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
25	67253-95600	.WASHER	1	
26	67255-96L00	.NEUTRAL LOCK ARM	1	
27	67256-95600	.HOLDER, NEUTRAL LOCK	1	
28	67257-96L00	.CAP ASSY, LEVER	1	
29	77811-54GB0-0PG	..EMBLEM, RR MARK S (CHROME)	1	
30	67258-99E00	.BRACKET	1	
31	67259-87D00	.SPRING, NEUTRAL ARM	1	
32	67261-96L00	.GRIP	1	
33	67296-96L10	.SCREW	2	
34	67264-95600	.WASHER	1	
35	67267-96L00	.COVER, WIRE SUB ASSY	1	
36	67273-95601	.SPACER	1	
37	67275-95600	.END, CABLE	2	
38	67292-94300	.E RING	3	
39	67294-95600	.SPACER	3	
40	67296-90J20	.SCREW	5	
41	67296-96L00	.SCREW	2	
42	67296-95630	.SCREW	3	
43	67296-95610	.SCREW	2	
44	67297-95600	.WASHER	2	
45	09100-08232	.BOLT (8X30)	1	
46	67269-96L10	.SCREW (5X12)	2	
47	09140-06020	.NUT	3	
48	67288-94320	.WAHSER (6.5X24X2)	3	
49	67224-96L00	.ARM, BRAKE ASSY	1	
50	67238-96L00	.GEAR, SHIFT ASSY	1	
51	67284-94L10	.MARK, HANDLE LEVER	1	
52	36620-94L01	WIRE ASSY, REMOTE CONTROL	1	
53	09481-10501	.FUSE (10A)	1	

DF25AR P01
DF30AR P01

FIG.450B

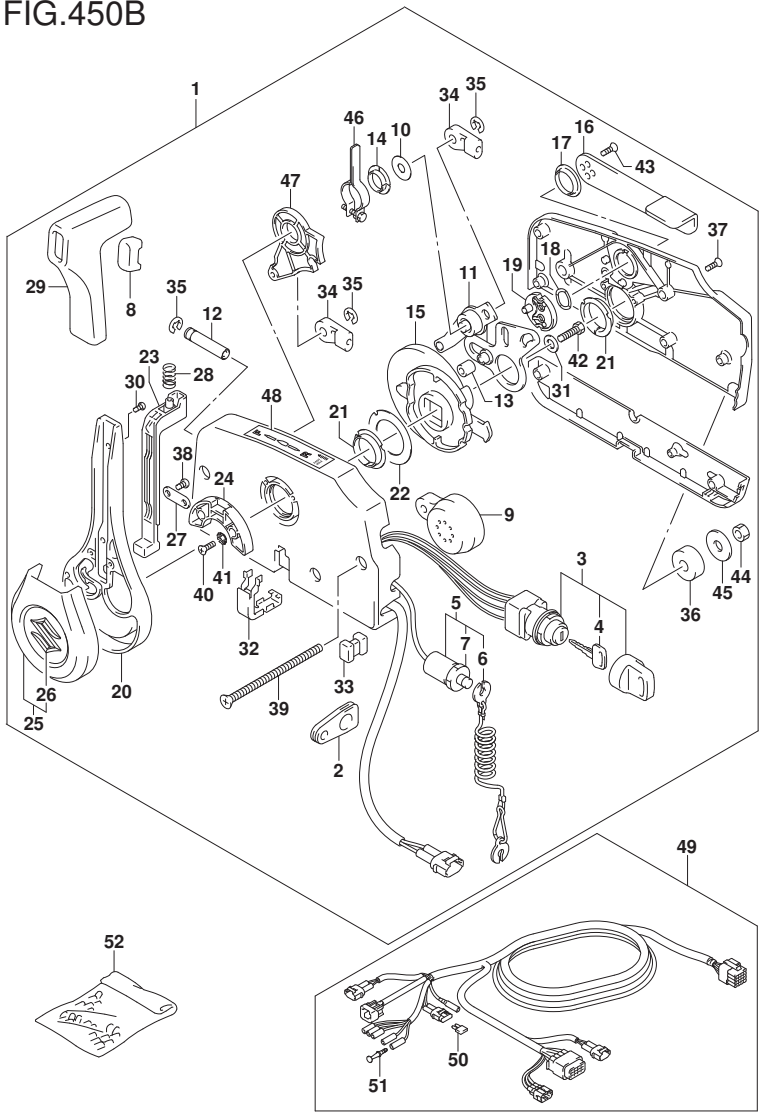


FIG.450B (1-K-4) REMOTE CONTROL (DF30AR:022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-94J40	REMOTE CONTROL ASSY	1	
2	36628-91J00	.GROMMET, WIRING HARNESS	1	
3	37110-94J10	.SWITCH ASSY, IGNITION	1	
4-1	37141-99E00	..KEY (931)	2	
4-2	37141-99E10	..KEY (932)	2	
4-3	37141-99E20	..KEY (933)	2	
4-4	37141-99E30	..KEY (934)	2	
4-5	37141-99E40	..KEY (935)	2	
4-6	37141-99E50	..KEY (936)	2	
4-7	37141-99E60	..KEY (937)	2	
4-8	37141-99E70	..KEY (938)	2	
4-9	37141-99E80	..KEY (939)	2	
4-10	37141-99E90	..KEY (940)	2	
4-11	37141-99EA0	..KEY (941)	2	
4-12	37141-99EB0	..KEY (942)	2	
5	37820-93J11	.SWITCH ASSY, EMERGENCY	1	
6	37823-92E02	..PLATE ASSY, EMERGENCY SW LOCK	1	
7	37826-92J10	..NUT	1	
8	67263-88L30	.CAP, GRIP SW HOLE	1	
9	38500-93J90	.BUZZER, WARNING	1	
10	67212-95600	.WASHER	1	
11	67220-95630	.PLATE ASSY	1	
12	67223-99E10	.KNOB, BRAKE ADJUST	1	
13	67229-95600	.ROLLER	1	
14	67232-95600	.BUSH	1	
15	67238-87D00	.GEAR, DRIVE	1	
16	67241-99E11	.LEVER, FREE THROTTLE	1	
17	67243-95600	.BUSH	1	
18	67244-95600	.WAVE WASHER	1	
19	67245-95600	.DRUM, FREE THROTTLE	1	
20	67251-96L00	.LEVER, HANDLE	1	
21	67252-95600	.BUSH	2	
22	67253-95600	.WASHER	1	
23	67255-96L00	.NEUTRAL LOCK ARM	1	
24	67256-95600	.HOLDER, NEUTRAL LOCK	1	

FIG.450B

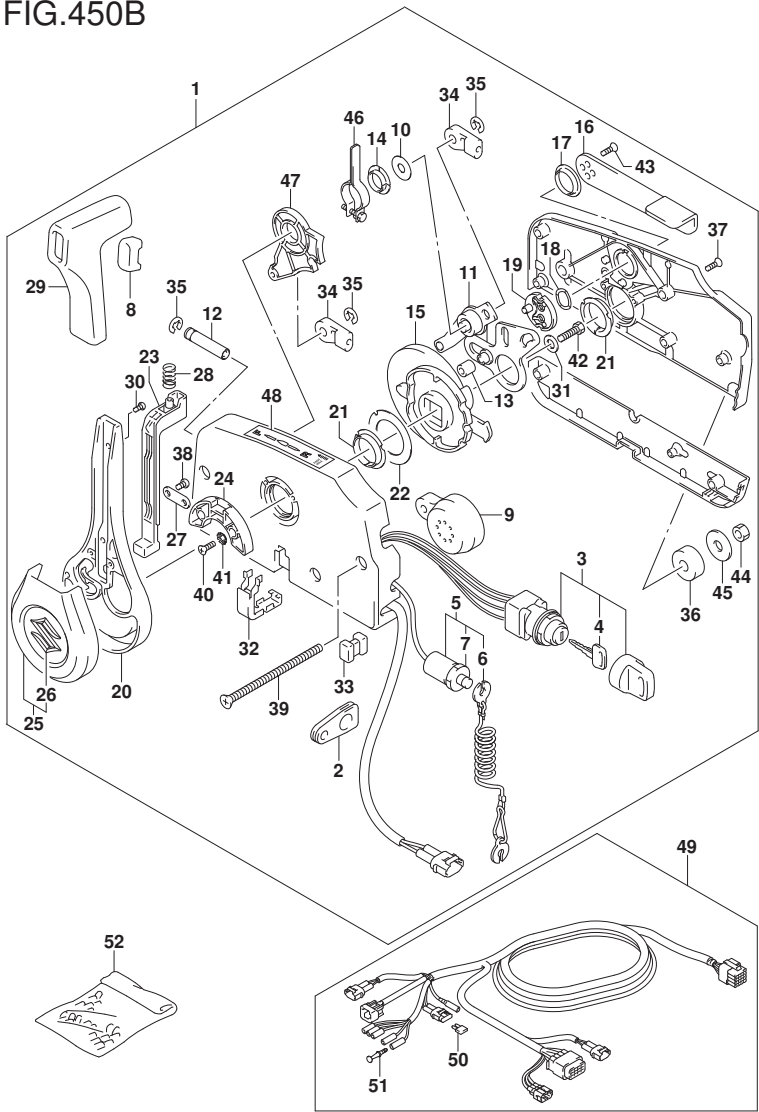


FIG.450B (1-K-5) REMOTE CONTROL (DF30AR:022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
25	67257-96L00	.CAP ASSY, LEVER	1	
26	77811-54GB0-0PG	..EMBLEM, RR MARK S (CHROME)	1	
27	67258-99E00	.BRACKET	1	
28	67259-87D00	.SPRING, NEUTRAL ARM	1	
29	67261-96L00	.GRIP	1	
30	67296-96L10	.SCREW	2	
31	67264-95600	.WASHER	1	
32	67267-96L00	.COVER, WIRE SUB ASSY	1	
33	67273-95601	.SPACER	1	
34	67275-95600	.END, CABLE	2	
35	67292-94300	.E RING	3	
36	67294-95600	.SPACER	3	
37	67296-90J20	.SCREW	5	
38	67296-96L00	.SCREW	2	
39	67296-95630	.SCREW	3	
40	67296-95610	.SCREW	2	
41	67297-95600	.WASHER	2	
42	09100-08232	.BOLT (8X30)	1	
43	67269-96L10	.SCREW (5X12)	2	
44	09140-06020	.NUT	3	
45	67288-94320	.WAHSER (6.5X24X2)	3	
46	67224-96L00	.ARM, BRAKE ASSY	1	
47	67238-96L00	.GEAR, SHIFT ASSY	1	
48	67284-94L10	.MARK, HANDLE LEVER	1	
49	36620-94L20	WIRE ASSY, REMOTE CONTROL	1	
50	09481-10501	.FUSE (10A)	1	
51	36615-96300	.TERMINAL	5	
52	36990-87D00	TERMINAL & SLEEVE SET	1	OPT

DF30AR P01

This diagram shows an exploded view of a device assembly, likely a handheld scanner or similar electronic device. The main body is labeled 1. Various components are shown in their relative positions, with callouts for each part:

- 1**: Main device body.
- 2**: Small metal bracket or clip.
- 3**: Cable connector or plug.
- 4**: Small pin or screw.
- 5**: Small metal component.
- 6**: Cable connector or plug.
- 7**: Small metal component.
- 8**: Cable connector or plug.
- 9**: Spring or coiled cable.
- 10**: Cable connector or plug.
- 11**: Small metal component.
- 12**: Cable or connector assembly.
- 13**: Small metal component.
- 14**: Small metal component.
- 15**: Small metal component.
- 16**: Small metal component.
- 17**: Small metal component.
- 18**: Small metal component.
- 19**: Small metal component.
- 20**: Small metal component.
- 21**: Small metal component.
- 22**: Small metal component.
- 23**: Small metal component.
- 24**: Small metal component.
- 25**: Small metal component.
- 26**: Small metal component.
- 27**: Small metal component.
- 28**: Small metal component.
- 29**: Small metal component.
- 30**: Small metal component.
- 31**: Small metal component.
- 32**: Small metal component.
- 33**: Small metal component.
- 34**: Small metal component.
- 35**: Small metal component.
- 36**: Small metal component.
- 37**: Small metal component.
- 38**: Small metal component.
- 39**: Small metal component.
- 40**: Small metal component.
- 41**: Small metal component.
- 42**: Small metal component.
- 43**: Small metal component.
- 44**: Small metal component.
- 45**: Small metal component.
- 46**: Small metal component.
- 47**: Small metal component.
- 48**: Small metal component.
- 49**: Small metal component.
- 50**: Small metal component.
- 51**: Small metal component.
- 52**: Small metal component.
- 53**: Small metal component.
- 54**: Small metal component.

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-93J62	REMOTE CONTROL ASSY	1	
2	36628-92E01	.GROMMET, WIRING HARNESS	1	
3	37110-93J12	.SWITCH ASSY, IGNITION	1	
4-1	37141-99E00	..KEY (931)	2	
4-2	37141-99E10	..KEY (932)	2	
4-3	37141-99E20	..KEY (933)	2	
4-4	37141-99E30	..KEY (934)	2	
4-5	37141-99E40	..KEY (935)	2	
4-6	37141-99E50	..KEY (936)	2	
4-7	37141-99E60	..KEY (937)	2	
4-8	37141-99E70	..KEY (938)	2	
4-9	37141-99E80	..KEY (939)	2	
4-10	37141-99E90	..KEY (940)	2	
4-11	37141-99EA0	..KEY (941)	2	
4-12	37141-99EB0	..KEY (942)	2	
5	37143-99E01	..CAP, KEY	2	
6	37149-93J00	..CAP, CYLINDER BODY	1	
7	37721-93J91	.SWITCH ASSY, NEUTRAL	1	
8	37820-93J11	.SWITCH ASSY, EMERGENCY	1	
9	37823-92E02	..PLATE ASSY, EMERGENCY SW LOCK	1	
10	37826-92J10	..NUT	1	
11	37850-96L00	.SWITCH ASSY, PTT	1	
12	38500-93J90	.BUZZER, WARNING	1	
13	67212-95600	.WASHER	1	
14	67296-92E11	.SCREW, NEUTRAL SWITCH (3X15)	2	
15	67220-95630	.PLATE ASSY	1	
16	67223-99E10	.KNOB, BRAKE ADJUST	1	
17	67229-95600	.ROLLER	1	
18	67232-95600	.BUSH	1	
19	67238-87D00	.GEAR, DRIVE	1	
20	67241-99E11	.LEVER, FREE THROTTLE	1	
21	67243-95600	.BUSH	1	
22	67244-95600	.WAVE WASHER	1	
23	67245-95600	.DRUM, FREE THROTTLE	1	
24	67251-96L00	.LEVER, HANDLE	1	

This diagram shows an exploded view of a device assembly, likely a handheld scanner or similar electronic device. The main body is labeled 1. Various components are shown in their relative positions, with callouts for each part:

- 1**: Main device body.
- 2**: Small metal bracket or clip.
- 3**: Cable connector or plug.
- 4**: Small pin or screw.
- 5**: Small metal component.
- 6**: Cable connector or plug.
- 7**: Small metal component.
- 8**: Cable with a connector.
- 9**: Small metal component.
- 10**: Cable connector or plug.
- 11**: Small metal component.
- 12**: Cable with a connector.
- 13**: Small metal component.
- 14**: Small metal component.
- 15**: Small metal component.
- 16**: Small metal component.
- 17**: Small metal component.
- 18**: Small metal component.
- 19**: Small metal component.
- 20**: Small metal component.
- 21**: Small metal component.
- 22**: Small metal component.
- 23**: Small metal component.
- 24**: Small metal component.
- 25**: Small metal component.
- 26**: Small metal component.
- 27**: Small metal component.
- 28**: Small metal component.
- 29**: Small metal component.
- 30**: Small metal component.
- 31**: Small metal component.
- 32**: Small metal component.
- 33**: Small metal component.
- 34**: Small metal component.
- 35**: Small metal component.
- 36**: Small metal component.
- 37**: Small metal component.
- 38**: Small metal component.
- 39**: Small metal component.
- 40**: Small metal component.
- 41**: Small metal component.
- 42**: Small metal component.
- 43**: Small metal component.
- 44**: Small metal component.
- 45**: Small metal component.
- 46**: Small metal component.
- 47**: Small metal component.
- 48**: Small metal component.
- 49**: Small metal component.
- 50**: Small metal component.
- 51**: Small metal component.
- 52**: Small metal component.
- 53**: Small metal component.
- 54**: Small metal component.

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
25	67252-95600	.BUSH	2	
26	67253-95600	.WASHER	1	
27	67255-96L00	.NEUTRAL LOCK ARM	1	
28	67256-95600	.HOLDER, NEUTRAL LOCK	1	
29	67257-96L00	.CAP ASSY, LEVER	1	
30	77811-54GB0-OPG	..EMBLEM, RR MARK S (CHROME)	1	
31	67258-99E00	.BRACKET	1	
32	67259-87D00	.SPRING, NEUTRAL ARM	1	
33	67261-96L00	.GRIP	1	
34	67296-96L10	.SCREW	2	
35	67264-95600	.WASHER	1	
36	67267-96L00	.COVER, WIRE SUB ASSY	1	
37	67273-95601	.SPACER	1	
38	67275-95600	.END, CABLE	2	
39	67292-94300	.E RING	3	
40	67294-95600	.SPACER	3	
41	67296-90J20	.SCREW	5	
42	67296-96L00	.SCREW	2	
43	67296-95630	.SCREW	3	
44	67296-95610	.SCREW	2	
45	67297-95600	.WASHER	2	
46	09100-08232	.BOLT (8X30)	1	
47	67269-96L10	.SCREW (5X12)	2	
48	09140-06020	.NUT	3	
49	67288-94320	.WAHSER (6.5X24X2)	3	
50	67224-96L00	.ARM, BRAKE ASSY	1	
51	67238-96L00	.GEAR, SHIFT ASSY	1	
52	67284-94L10	.MARK, HANDLE LEVER	1	
53	36620-94L11	WIRE ASSY, REMOTE CONTROL	1	
54	09481-10501	.FUSE (10A)	1	

DF25A_30A_P01_022

FIG.450D

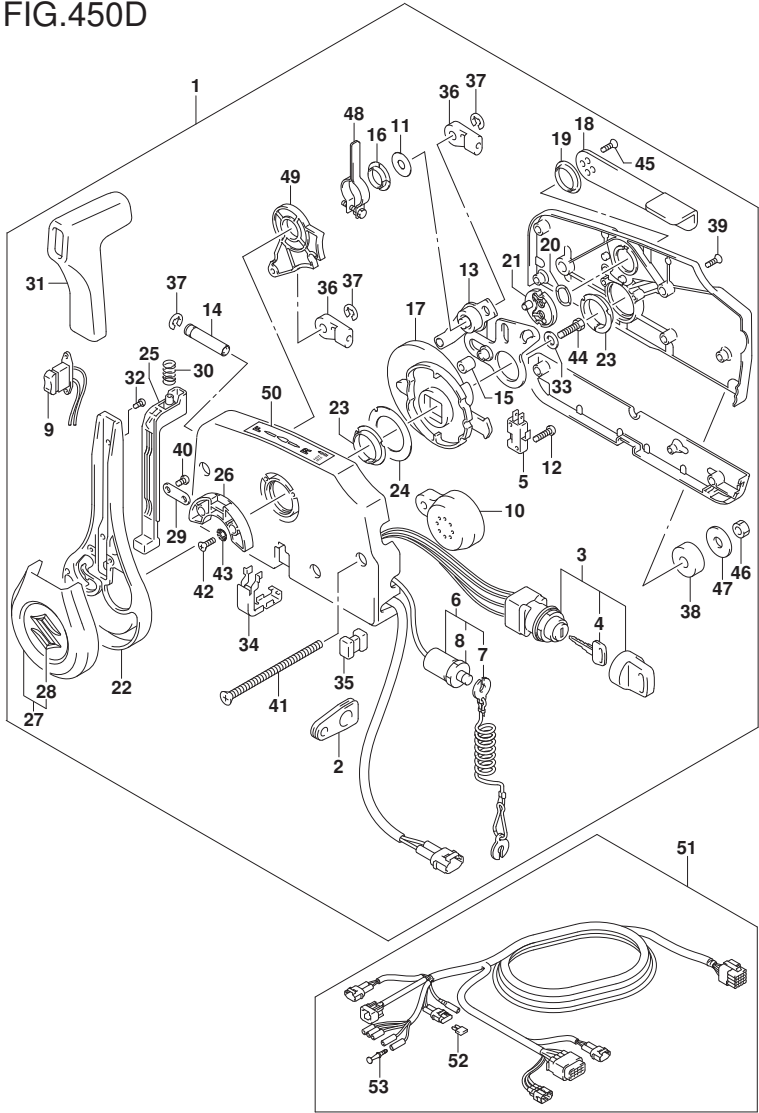


FIG.450D (1-K-8) REMOTE CONTROL ((DF25AT,DF30AT):022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-93J70	REMOTE CONTROL ASSY	1	
2	36628-92E01	.GROMMET, WIRING HARNESS	1	
3	37110-93J20	.SWITCH ASSY, IGNITION	1	
4-1	37141-99E00	..KEY (931)	2	
4-2	37141-99E10	..KEY (932)	2	
4-3	37141-99E20	..KEY (933)	2	
4-4	37141-99E30	..KEY (934)	2	
4-5	37141-99E40	..KEY (935)	2	
4-6	37141-99E50	..KEY (936)	2	
4-7	37141-99E60	..KEY (937)	2	
4-8	37141-99E70	..KEY (938)	2	
4-9	37141-99E80	..KEY (939)	2	
4-10	37141-99E90	..KEY (940)	2	
4-11	37141-99EA0	..KEY (941)	2	
4-12	37141-99EB0	..KEY (942)	2	
5	37721-93J91	.SWITCH ASSY, NEUTRAL	1	
6	37820-93J11	.SWITCH ASSY, EMERGENCY	1	
7	37823-92E02	..PLATE ASSY, EMERGENCY SW LOCK	1	
8	37826-92J10	..NUT	1	
9	37850-96L00	.SWITCH ASSY, PTT	1	
10	38500-93J90	.BUZZER, WARNING	1	
11	67212-95600	.WASHER	1	
12	67296-92E11	.SCREW, NEUTRAL SWITCH (3X15)	2	
13	67220-95630	.PLATE ASSY	1	
14	67223-99E10	.KNOB, BRAKE ADJUST	1	
15	67229-95600	.ROLLER	1	
16	67232-95600	.BUSH	1	
17	67238-87D00	.GEAR, DRIVE	1	
18	67241-99E11	.LEVER, FREE THROTTLE	1	
19	67243-95600	.BUSH	1	
20	67244-95600	.WAVE WASHER	1	
21	67245-95600	.DRUM, FREE THROTTLE	1	
22	67251-96L00	.LEVER, HANDLE	1	
23	67252-95600	.BUSH	2	
24	67253-95600	.WASHER	1	

FIG.450D

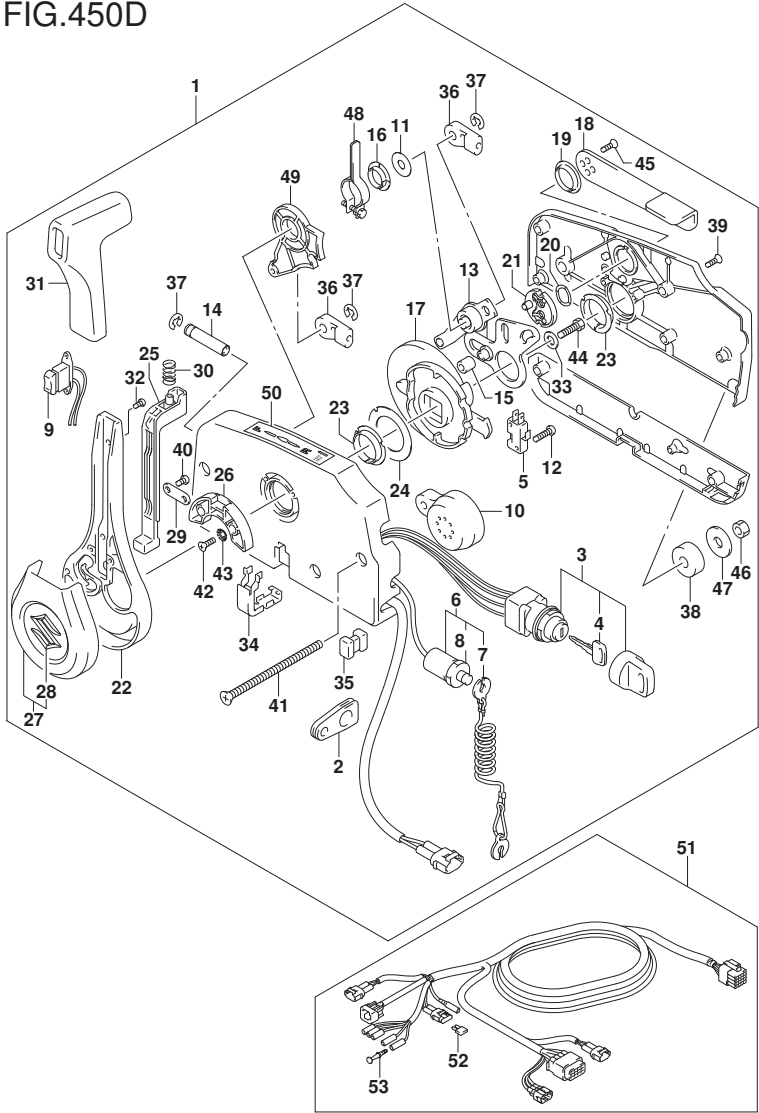


FIG.450D (1-K-9) REMOTE CONTROL ((DF25AT,DF30AT):022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
25	67255-96L00	.NEUTRAL LOCK ARM	1	
26	67256-95600	.HOLDER, NEUTRAL LOCK	1	
27	67257-96L00	.CAP ASSY, LEVER	1	
28	77811-54GB0-0PG	..EMBLEM, RR MARK S (CHROME)	1	
29	67258-99E00	.BRACKET	1	
30	67259-87D00	.SPRING, NEUTRAL ARM	1	
31	67261-96L00	.GRIP	1	
32	67296-96L10	.SCREW	2	
33	67264-95600	.WASHER	1	
34	67267-96L00	.COVER, WIRE SUB ASSY	1	
35	67273-95601	.SPACER	1	
36	67275-95600	.END, CABLE	2	
37	67292-94300	.E RING	3	
38	67294-95600	.SPACER	3	
39	67296-90J20	.SCREW	5	
40	67296-96L00	.SCREW	2	
41	67296-95630	.SCREW	3	
42	67296-95610	.SCREW	2	
43	67297-95600	.WASHER	2	
44	09100-08232	.BOLT (8X30)	1	
45	67269-96L10	.SCREW (5X12)	2	
46	09140-06020	.NUT	3	
47	67288-94320	.WAHSER (6.5X24X2)	3	
48	67224-96L00	.ARM, BRAKE ASSY	1	
49	67238-96L00	.GEAR, SHIFT ASSY	1	
50	67284-94L10	.MARK, HANDLE LEVER	1	
51	36620-94L20	WIRE ASSY, REMOTE CONTROL	1	
52	09481-10501	.FUSE (10A)	1	
53	36615-96300	.TERMINAL	5	

DF25AT P01
DF30AT P01

FIG.501A

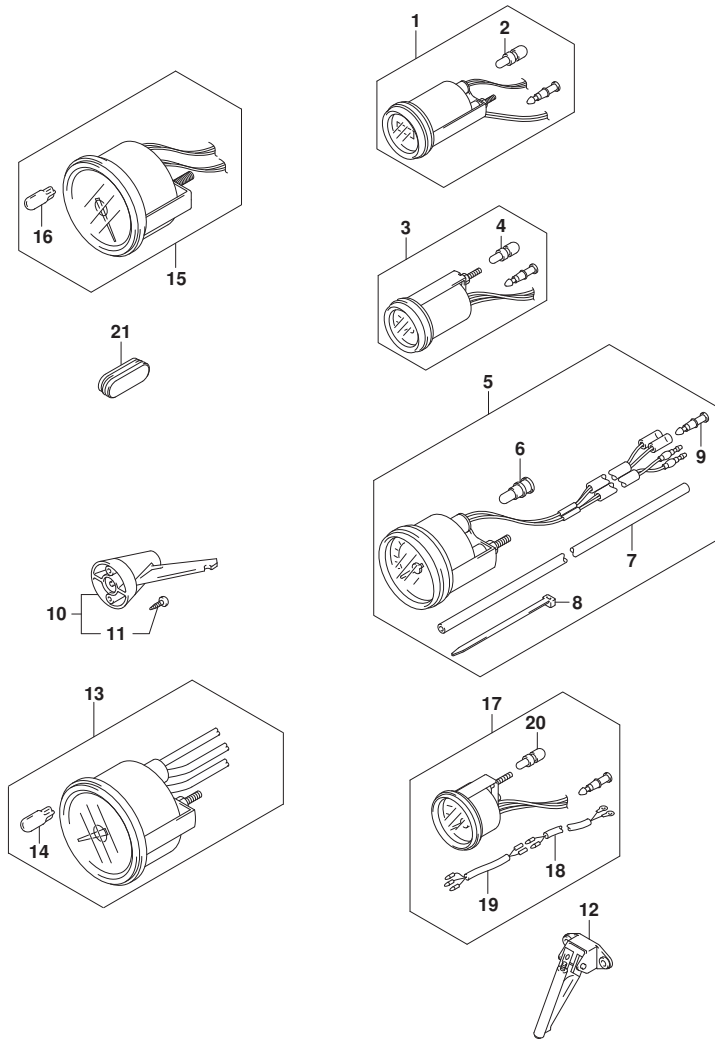


FIG.501A (1-K-10) OPT:METER (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	34500-93J02	METER ASSY, HOUR	1	BLACK
1-2	34500-93J13	METER ASSY, HOUR	1	WHITE
2	09471-12103	.BULB (12V3W,T6.5)	1	
3-1	34600-93J02	METER ASSY, VOLTAGE	1	BLACK
3-2	34600-93J13	METER ASSY, VOLTAGE	1	WHITE
4	09471-12103	.BULB (12V3W,T6.5)	1	
5-1	34100-93J22	SPEEDOMETER ASSY (MAX 80KM/H)	1	BLACK
5-2	34100-93J33	SPEEDOMETER ASSY (MAX 80KM/H)	1	WHITE
5-3	34100-93J42	SPEEDOMETER ASSY (MAX 45KNOTS)	1	BLACK
5-4	34100-93J53	SPEEDOMETER ASSY (MAX 45KNOTS)	1	WHITE
6	09471-12028	.BULB (12V3.4W,T10)	1	
7	34191-92E00	.TUBE	1	
8	09407-14407	.CLAMP (L:145)	2	
9	36615-96300	.TERMINAL	2	
10	34190-95500	SENDER, SPEEDOMETER	1	
11	03112-0630B	.SCREW	2	
12	34190-87D00	SENDER, SPEEDOMETER	1	
13-1	34200-93J22	TACHOMETER ASSY, BLACK	1	BLACK
13-2	34200-93J34	TACHOMETER ASSY, WHITE	1	WHITE
14	09471-12028	.BULB (12V3.4W,T10)	1	
15-1	34200-93J02	TACHOMETER ASSY, WITH MONITOR	1	BLACK
15-2	34200-93J14	TACHOMETER ASSY, WITH MONITOR	1	WHITE
16	09471-12077	.BULB (12V1.7W,T10)	1	
17-1	34300-93J03	GAUGE ASSY, FUEL	1	BLACK
17-2	34300-93J14	GAUGE ASSY, FUEL	1	WHITE
18	34310-92E01	.LEAD ASSY, FUEL GAUGE	1	
19	34360-92E00	.ADAPTER, FUEL GAUGE	1	
20	09471-12103	.BULB (12V3W,T6.5)	1	

NOTE : (DF25A,DF30A,DF30AQ):022,DF25AR:021,DF30AR

FIG.501A

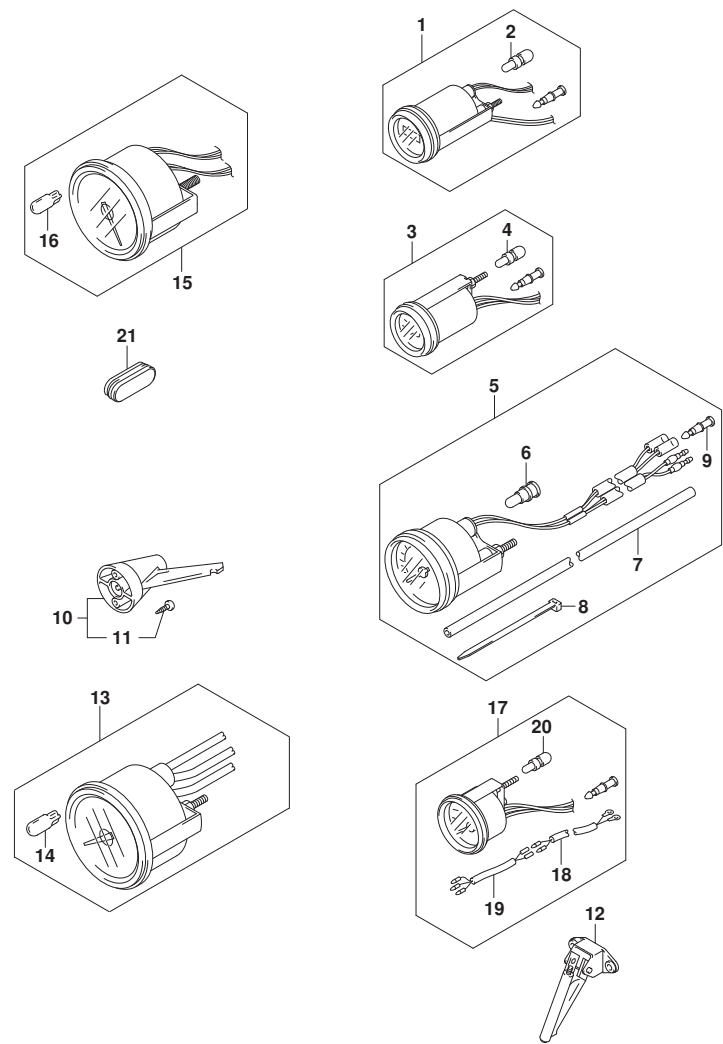


FIG.501A (1-K-11) OPT:METER (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
21	39669-94L00	PLUG, LOWER COVER	1	LOWER

NOTE : (DF25A,DF30A,DF30AQ):022,DF25AR:021,DF30AR

- DF25A P01
- DF25AR P01
- DF30A P40
- DF30AQ P01
- DF30AR P01

FIG.501B

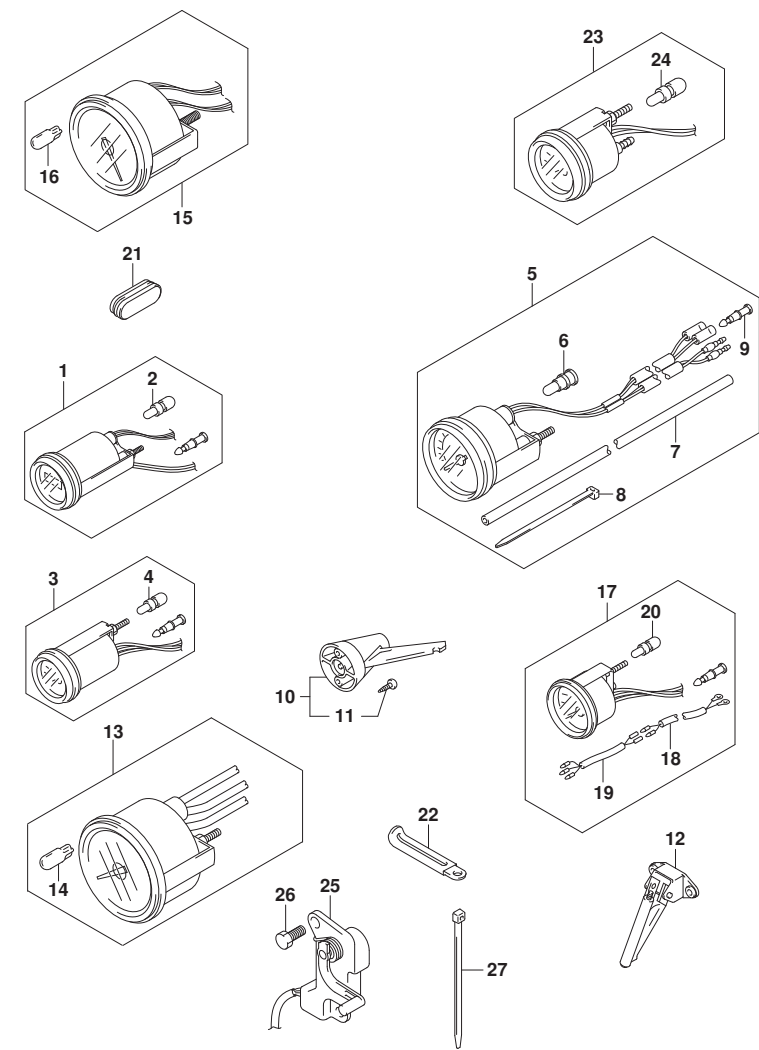


FIG.501B (1-K-12) OPT:METER (DF25AT,(DF25ATH,DF30ATH):022,DF30AT)				
REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	34500-93J02	METER ASSY, HOUR	1	BLACK
1-2	34500-93J13	METER ASSY, HOUR	1	WHITE
2	09471-12103	.BULB (12V3W,T6.5)	1	
3-1	34600-93J02	METER ASSY, VOLTAGE	1	BLACK
3-2	34600-93J13	METER ASSY, VOLTAGE	1	WHITE
4	09471-12103	.BULB (12V3W,T6.5)	1	
5-1	34100-93J22	SPEEDOMETER ASSY (MAX 80KM/H)	1	BLACK
5-2	34100-93J33	SPEEDOMETER ASSY (MAX 80KM/H)	1	WHITE
5-3	34100-93J42	SPEEDOMETER ASSY (MAX 45KNOTS)	1	BLACK
5-4	34100-93J53	SPEEDOMETER ASSY (MAX 45KNOTS)	1	WHITE
6	09471-12028	.BULB (12V3.4W,T10)	1	
7	34191-92E00	.TUBE	1	
8	09407-14407	.CLAMP (L:145)	2	
9	36615-96300	.TERMINAL	2	
10	34190-95500	SENDER, SPEEDOMETER	1	
11	03112-0630B	.SCREW	2	
12	34190-87D00	SENDER, SPEEDOMETER	1	
13-1	34200-93J22	TACHOMETER ASSY, BLACK	1	BLACK
13-2	34200-93J34	TACHOMETER ASSY, WHITE	1	WHITE
14	09471-12028	.BULB (12V3.4W,T10)	1	
15-1	34200-93J02	TACHOMETER ASSY, WITH MONITOR	1	BLACK
15-2	34200-93J14	TACHOMETER ASSY, WITH MONITOR	1	WHITE
16	09471-12077	.BULB (12V1.7W,T10)	1	
17-1	34300-93J03	GAUGE ASSY, FUEL	1	BLACK
17-2	34300-93J14	GAUGE ASSY, FUEL	1	WHITE
18	34310-92E01	.LEAD ASSY, FUEL GAUGE	1	
19	34360-92E00	.ADAPTER, FUEL GAUGE	1	
20	09471-12103	.BULB (12V3W,T6.5)	1	
21	39669-94L00	PLUG, LOWER COVER	1	LOWER
22	29404-93J11	CLAMP (L:65)	1	
23-1	34800-93J02	METER ASSY, TRIM	1	BLACK
23-2	34800-93J13	METER ASSY, TRIM	1	WHITE
24	09471-12108	.BULB (12V1.7W,T6.5)	1	
25	34801-99E05	SENDER ASSY, TRIM	1	
26	09100-06113	BOLT (6X16)	2	

FIG.501B

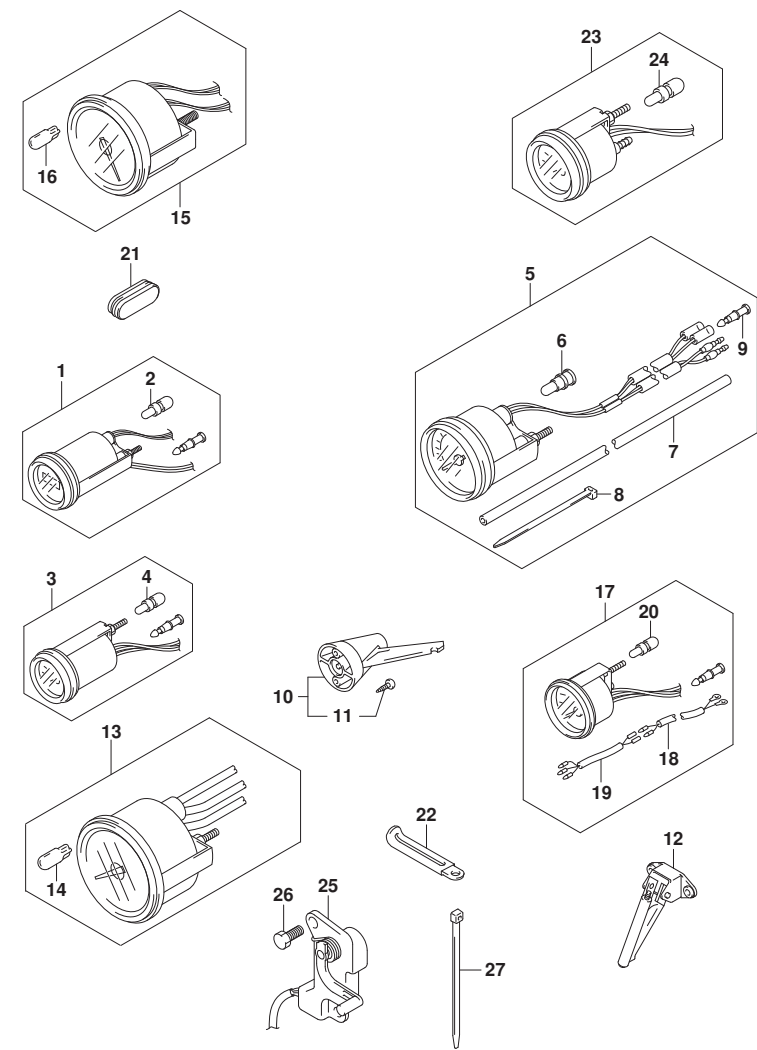


FIG.501B (1-K-13) OPT:METER (DF25AT,(DF25ATH,DF30ATH):022,DF30AT)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
27	09407-14407	CLAMP (L:145)	2	

DF25AT P01
DF25ATH P01
DF30AT P01
DF30ATH P01

FIG.508A

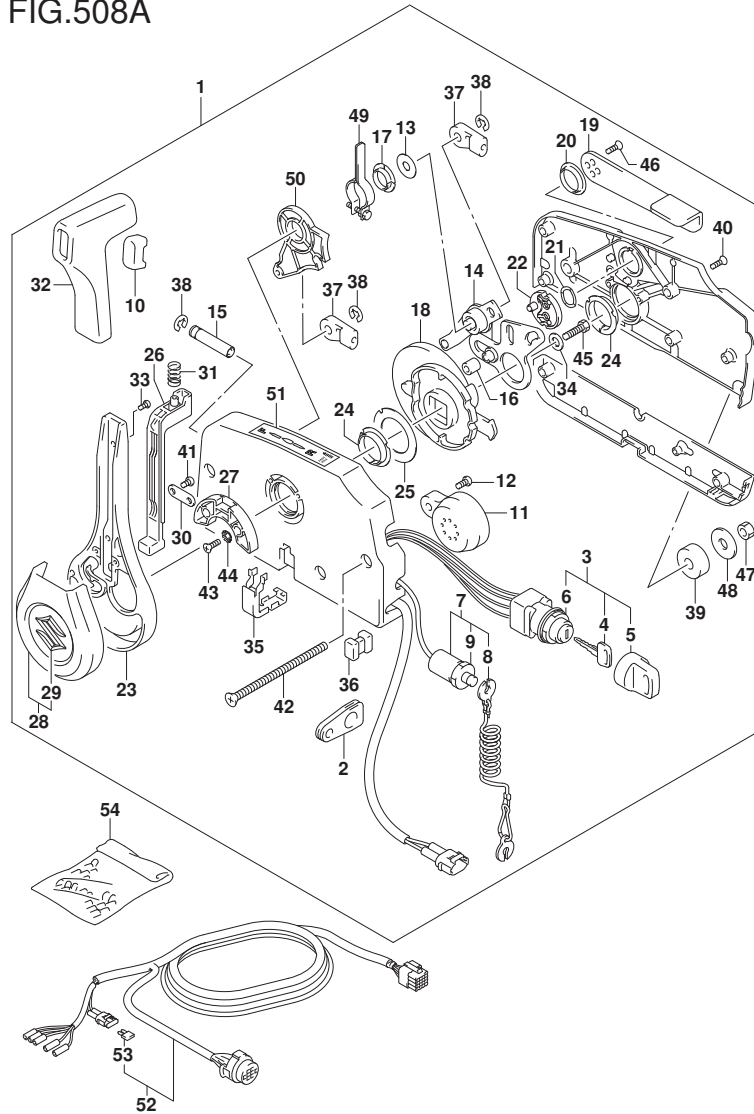


FIG.508A (1-K-14) OPT:REMOTE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-94J33	REMOTE CONTROL ASSY	1	
2	36628-91J00	..GROMMET, WIRING HARNESS	1	
3	37110-94J03	..SWITCH ASSY, IGNITION	1	
4-1	37141-99E00	..KEY (931)	2	
4-2	37141-99E10	..KEY (932)	2	
4-3	37141-99E20	..KEY (933)	2	
4-4	37141-99E30	..KEY (934)	2	
4-5	37141-99E40	..KEY (935)	2	
4-6	37141-99E50	..KEY (936)	2	
4-7	37141-99E60	..KEY (937)	2	
4-8	37141-99E70	..KEY (938)	2	
4-9	37141-99E80	..KEY (939)	2	
4-10	37141-99E90	..KEY (940)	2	
4-11	37141-99EA0	..KEY (941)	2	
4-12	37141-99EB0	..KEY (942)	2	
5	37143-99E01	..CAP, KEY	2	
6	37149-93J00	..CAP, CYLINDER BODY	1	
7	37820-93J11	..SWITCH ASSY, EMERGENCY	1	
8	37823-92E02	..PLATE ASSY, EMERGENCY SW LOCK	1	
9	37826-92J10	..NUT	1	
10	67263-88L30	..CAP, GRIP SW HOLE	1	
11	38500-93J00	..BUZZER ASSY, WARNING	1	
12	67214-92E00	..SCREW (5X20)	1	
13	67212-95600	..WASHER	1	
14	67220-95630	..PLATE ASSY	1	
15	67223-99E10	..KNOB, BRAKE ADJUST	1	
16	67229-95600	..ROLLER	1	
17	67232-95600	..BUSH	1	
18	67238-87D00	..GEAR, DRIVE	1	
19	67241-99E11	..LEVER, FREE THROTTLE	1	
20	67243-95600	..BUSH	1	

NOTE : (DF25A,DF30A,DF30AQ):(020,021)

FIG.508A

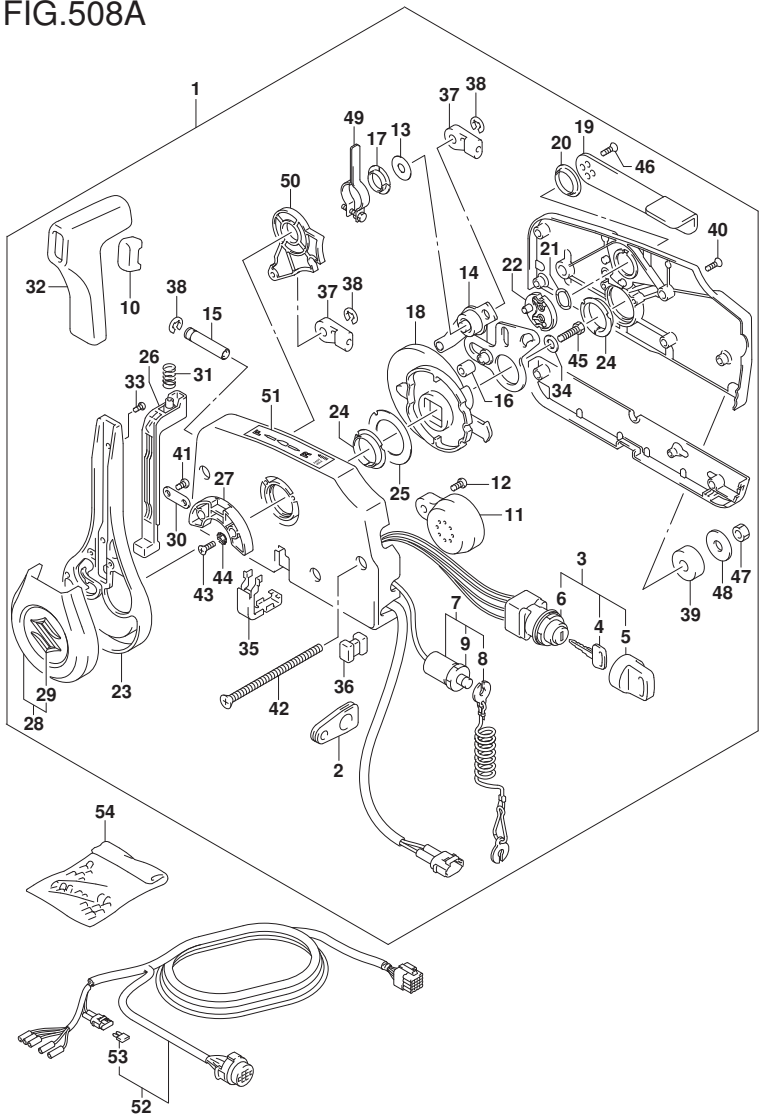


FIG.508A (1-K-15) OPT:REMOTE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
21	67244-95600	.WAVE WASHER	1	
22	67245-95600	.DRUM, FREE THROTTLE	1	
23	67251-96L00	.LEVER, HANDLE	1	
24	67252-95600	.BUSH	2	
25	67253-95600	.WASHER	1	
26	67255-96L00	.NEUTRAL LOCK ARM	1	
27	67256-95600	.HOLDER, NEUTRAL LOCK	1	
28	67257-96L00	.CAP ASSY, LEVER	1	
29	77811-54GB0-0PG	..EMBLEM, RR MARK S (CHROME)	1	
30	67258-99E00	.BRACKET	1	
31	67259-87D00	.SPRING, NEUTRAL ARM	1	
32	67261-96L00	.GRIP	1	
33	67296-96L10	.SCREW	2	
34	67264-95600	.WASHER	1	
35	67267-96L00	.COVER, WIRE SUB ASSY	1	
36	67273-95601	.SPACER	1	
37	67275-95600	.END, CABLE	2	
38	67292-94300	.E RING	3	
39	67294-95600	.SPACER	3	
40	67296-90J20	.SCREW	5	
41	67296-96L00	.SCREW	2	
42	67296-95630	.SCREW	3	
43	67296-95610	.SCREW	2	
44	67297-95600	.WASHER	2	
45	09100-08232	.BOLT (8X30)	1	
46	67269-96L10	.SCREW (5X12)	2	
47	09140-06020	.NUT	3	
48	67288-94320	.WAHSER (6.5X24X2)	3	
49	67224-96L00	.ARM, BRAKE ASSY	1	
50	67238-96L00	.GEAR, SHIFT ASSY	1	
51	67284-94L10	.MARK, HANDLE LEVER	1	
52	36620-94L01	WIRE ASSY, REMOTE CONTROL	1	

NOTE : (DF25A,DF30A,DF30AQ):(020,021)

FIG.508A

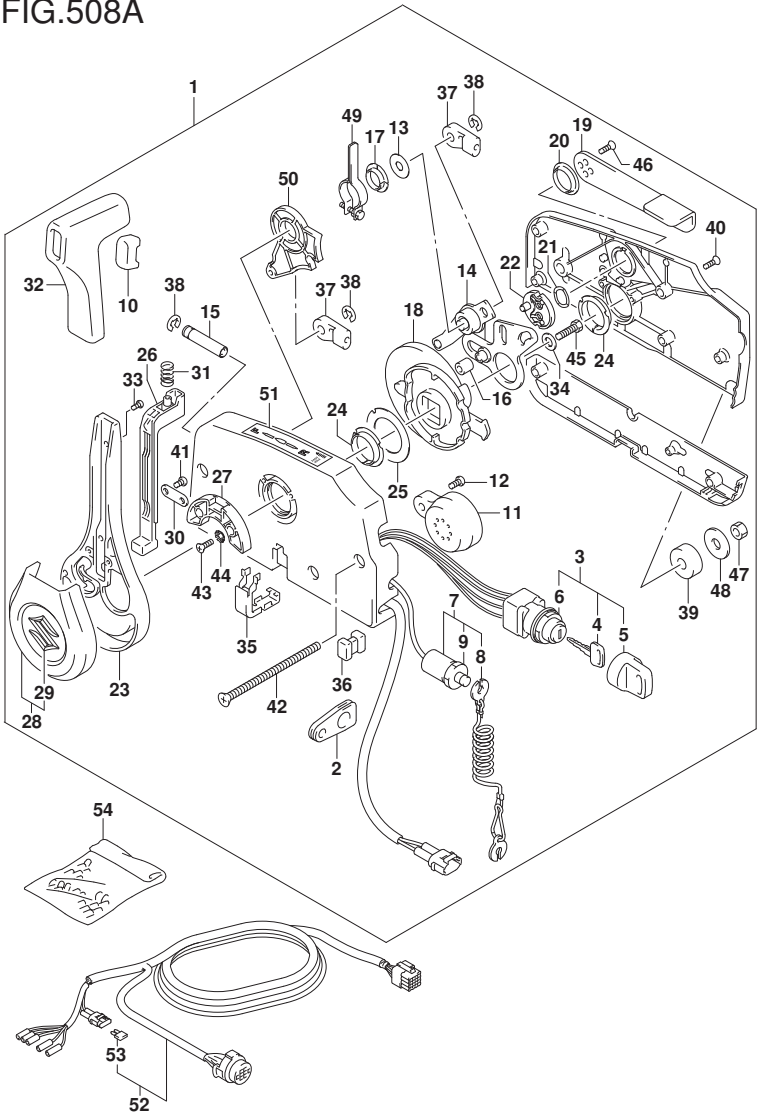


FIG.508A (1-L-2) OPT:REMOTE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
53	09481-10501	.FUSE (10A)	1	
54	36990-87D00	TERMINAL & SLEEVE SET	1	

NOTE : (DF25A,DF30A,DF30AQ):(020,021)

DF25A P01
DF30A P40
DF30AQ P01

FIG.508B

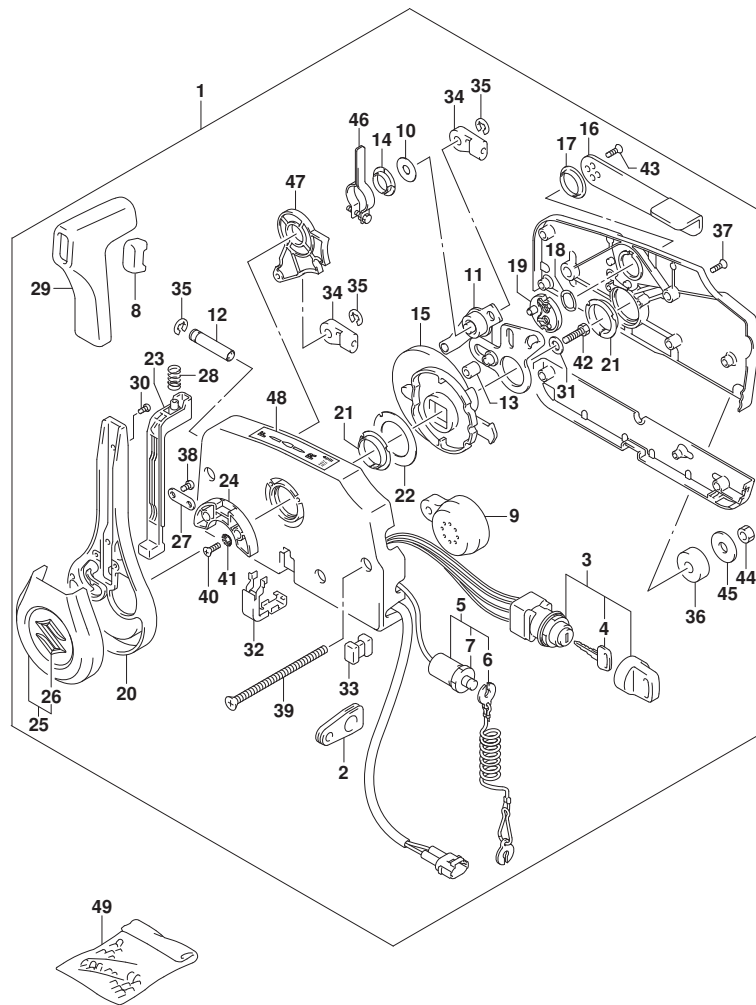


FIG.508B (1-L-3) OPT:REMOTE CONTROL ((DF25A,DF30A,DF30AQ):022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-94J40	REMOTE CONTROL ASSY	1	
2	36628-91J00	.GROMMET, WIRING HARNESS	1	
3	37110-94J10	.SWITCH ASSY, IGNITION	1	
4-1	37141-99E00	..KEY (931)	2	
4-2	37141-99E10	..KEY (932)	2	
4-3	37141-99E20	..KEY (933)	2	
4-4	37141-99E30	..KEY (934)	2	
4-5	37141-99E40	..KEY (935)	2	
4-6	37141-99E50	..KEY (936)	2	
4-7	37141-99E60	..KEY (937)	2	
4-8	37141-99E70	..KEY (938)	2	
4-9	37141-99E80	..KEY (939)	2	
4-10	37141-99E90	..KEY (940)	2	
4-11	37141-99EA0	..KEY (941)	2	
4-12	37141-99EB0	..KEY (942)	2	
5	37820-93J11	.SWITCH ASSY, EMERGENCY	1	
6	37823-92E02	..PLATE ASSY, EMERGENCY SW LOCK	1	
7	37826-92J10	..NUT	1	
8	67263-88L30	.CAP, GRIP SW HOLE	1	
9	38500-93J90	.BUZZER, WARNING	1	
10	67212-95600	.WASHER	1	
11	67220-95630	.PLATE ASSY	1	
12	67223-99E10	.KNOB, BRAKE ADJUST	1	
13	67229-95600	.ROLLER	1	
14	67232-95600	.BUSH	1	
15	67238-87D00	.GEAR, DRIVE	1	
16	67241-99E11	.LEVER, FREE THROTTLE	1	
17	67243-95600	.BUSH	1	
18	67244-95600	.WAVE WASHER	1	
19	67245-95600	.DRUM, FREE THROTTLE	1	
20	67251-96L00	.LEVER, HANDLE	1	
21	67252-95600	.BUSH	2	
22	67253-95600	.WASHER	1	
23	67255-96L00	.NEUTRAL LOCK ARM	1	
24	67256-95600	.HOLDER, NEUTRAL LOCK	1	

FIG.508B

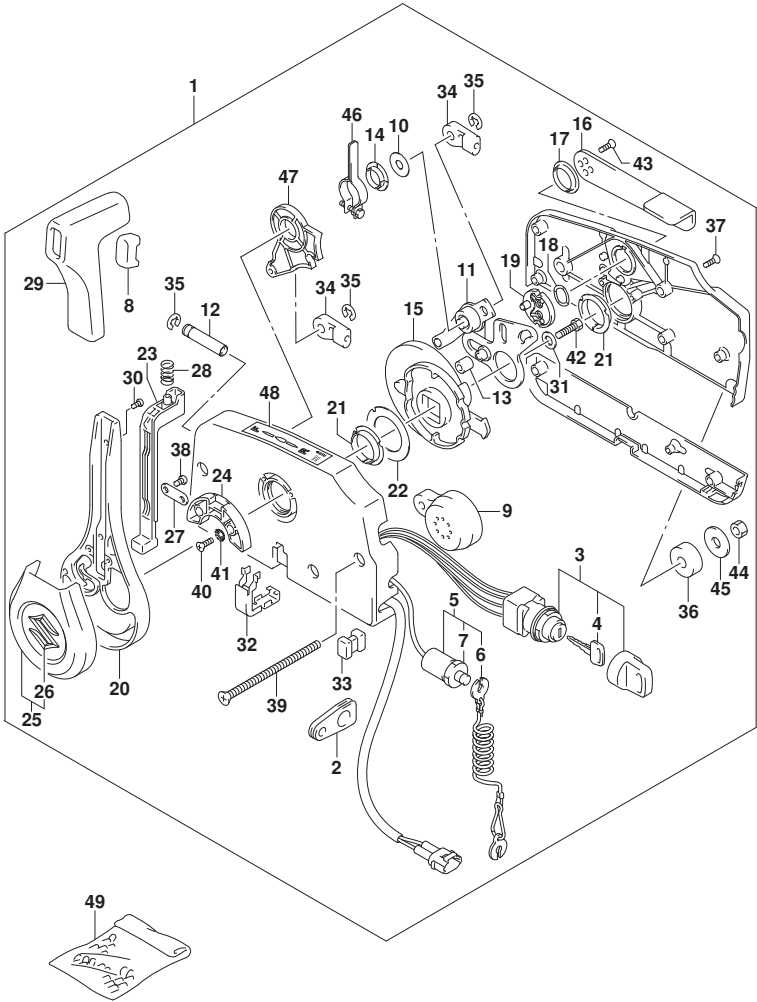


FIG.508B (1-L-4) OPT:REMOTE CONTROL ((DF25A,DF30A,DF30AQ):022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
25	67257-96L00	.CAP ASSY, LEVER	1	
26	77811-54GB0-0PG	..EMBLEM, RR MARK S (CHROME)	1	
27	67258-99E00	.BRACKET	1	
28	67259-87D00	.SPRING, NEUTRAL ARM	1	
29	67261-96L00	.GRIP	1	
30	67296-96L10	.SCREW	2	
31	67264-95600	.WASHER	1	
32	67267-96L00	.COVER, WIRE SUB ASSY	1	
33	67273-95601	.SPACER	1	
34	67275-95600	.END, CABLE	2	
35	67292-94300	.E RING	3	
36	67294-95600	.SPACER	3	
37	67296-90J20	.SCREW	5	
38	67296-96L00	.SCREW	2	
39	67296-95630	.SCREW	3	
40	67296-95610	.SCREW	2	
41	67297-95600	.WASHER	2	
42	09100-08232	.BOLT (8X30)	1	
43	67269-96L10	.SCREW (5X12)	2	
44	09140-06020	.NUT	3	
45	67288-94320	.WAHSER (6.5X24X2)	3	
46	67224-96L00	.ARM, BRAKE ASSY	1	
47	67238-96L00	.GEAR, SHIFT ASSY	1	
48	67284-94L10	.MARK, HANDLE LEVER	1	
49	36990-87D00	TERMINAL & SLEEVE SET	1	

DF25A P01
DF30A P40
DF30AQ P01

FIG.508C

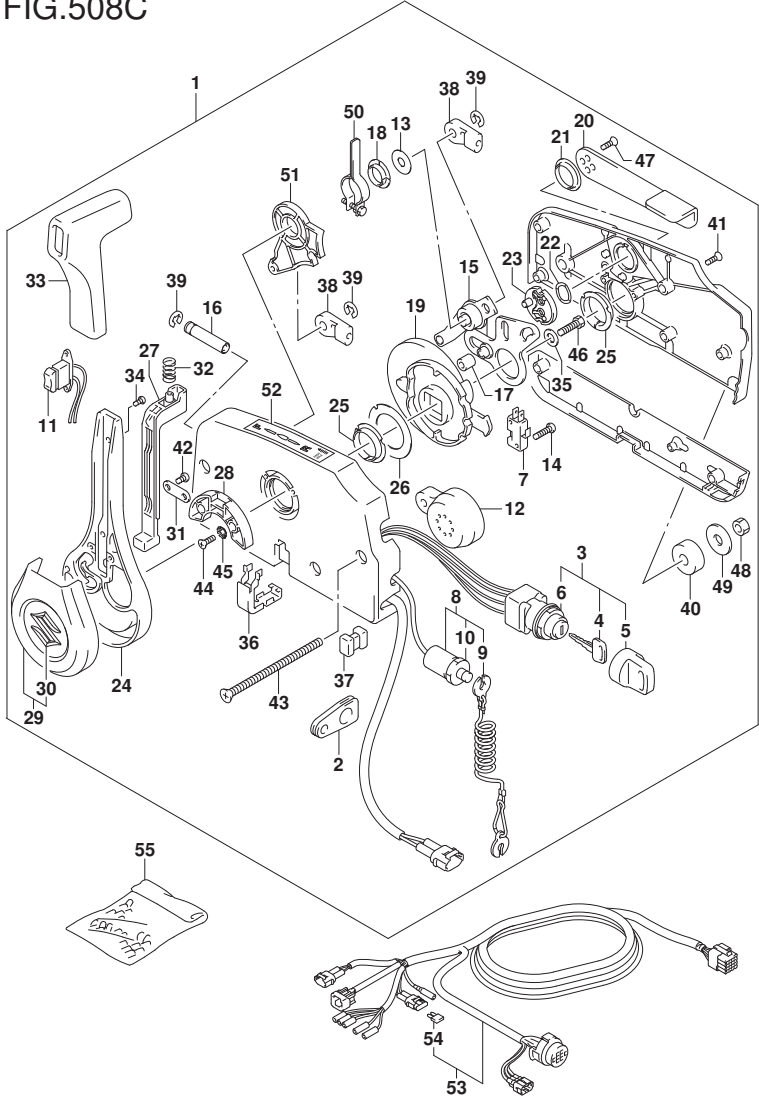


FIG.508C (1-L-5) OPT:REMOTE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-93J62	REMOTE CONTROL ASSY	1	
2	36628-92E01	.GROMMET, WIRING HARNESS	1	
3	37110-93J12	.SWITCH ASSY, IGNITION	1	
4-1	37141-99E00	..KEY (931)	2	
4-2	37141-99E10	..KEY (932)	2	
4-3	37141-99E20	..KEY (933)	2	
4-4	37141-99E30	..KEY (934)	2	
4-5	37141-99E40	..KEY (935)	2	
4-6	37141-99E50	..KEY (936)	2	
4-7	37141-99E60	..KEY (937)	2	
4-8	37141-99E70	..KEY (938)	2	
4-9	37141-99E80	..KEY (939)	2	
4-10	37141-99E90	..KEY (940)	2	
4-11	37141-99EA0	..KEY (941)	2	
4-12	37141-99EB0	..KEY (942)	2	
5	37143-99E01	..CAP, KEY	2	
6	37149-93J00	..CAP, CYLINDER BODY	1	
7	37721-93J91	.SWITCH ASSY, NEUTRAL	1	
8	37820-93J11	.SWITCH ASSY, EMERGENCY	1	
9	37823-92E02	..PLATE ASSY, EMERGENCY SW	1	
		LOCK		
10	37826-92J10	..NUT	1	
11	37850-96L00	.SWITCH ASSY, PTT	1	
12	38500-93J90	.BUZZER, WARNING	1	
13	67212-95600	.WASHER	1	
14	67296-92E11	.SCREW, NEUTRAL SWITCH (3X15)	2	
15	67220-95630	.PLATE ASSY	1	
16	67223-99E10	.KNOB, BRAKE ADJUST	1	
17	67229-95600	.ROLLER	1	
18	67232-95600	.BUSH	1	
19	67238-87D00	.GEAR, DRIVE	1	
20	67241-99E11	.LEVER, FREE THROTTLE	1	

NOTE : (DF25ATH,DF30ATH):(020,021)

FIG.508C

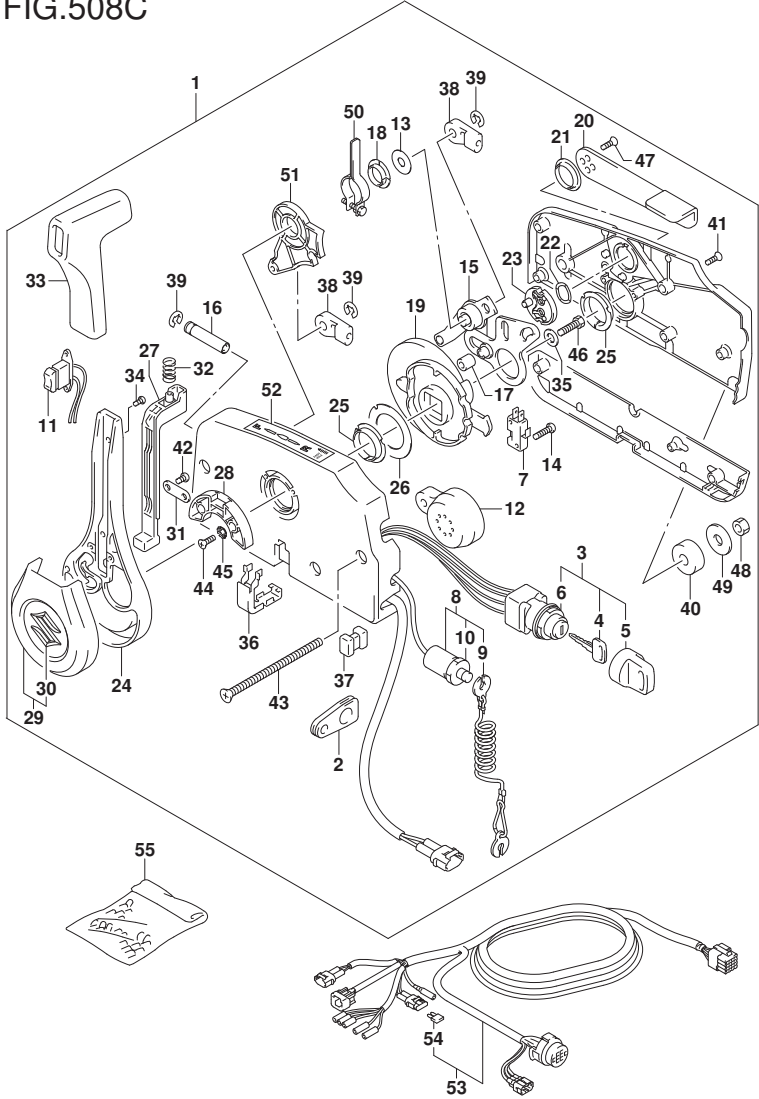


FIG.508C (1-L-6) OPT:REMOTE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
21	67243-95600	.BUSH	1	
22	67244-95600	.WAVE WASHER	1	
23	67245-95600	.DRUM, FREE THROTTLE	1	
24	67251-96L00	.LEVER, HANDLE	1	
25	67252-95600	.BUSH	2	
26	67253-95600	.WASHER	1	
27	67255-96L00	.NEUTRAL LOCK ARM	1	
28	67256-95600	.HOLDER, NEUTRAL LOCK	1	
29	67257-96L00	.CAP ASSY, LEVER	1	
30	77811-54GB0-0PG	.EMBLEM, RR MARK S (CHROME)	1	
31	67258-99E00	.BRACKET	1	
32	67259-87D00	.SPRING, NEUTRAL ARM	1	
33	67261-96L00	.GRIP	1	
34	67296-96L10	.SCREW	2	
35	67264-95600	.WASHER	1	
36	67267-96L00	.COVER, WIRE SUB ASSY	1	
37	67273-95601	.SPACER	1	
38	67275-95600	.END, CABLE	2	
39	67292-94300	.E RING	3	
40	67294-95600	.SPACER	3	
41	67296-90J20	.SCREW	5	
42	67296-96L00	.SCREW	2	
43	67296-95630	.SCREW	3	
44	67296-95610	.SCREW	2	
45	67297-95600	.WASHER	2	
46	09100-08232	.BOLT (8X30)	1	
47	67269-96L10	.SCREW (5X12)	2	
48	09140-06020	.NUT	3	
49	67288-94320	.WAHSER (6.5X24X2)	3	
50	67224-96L00	.ARM, BRAKE ASSY	1	
51	67238-96L00	.GEAR, SHIFT ASSY	1	
52	67284-94L10	.MARK, HANDLE LEVER	1	

NOTE : (DF25ATH,DF30ATH):(020,021)

FIG.508C

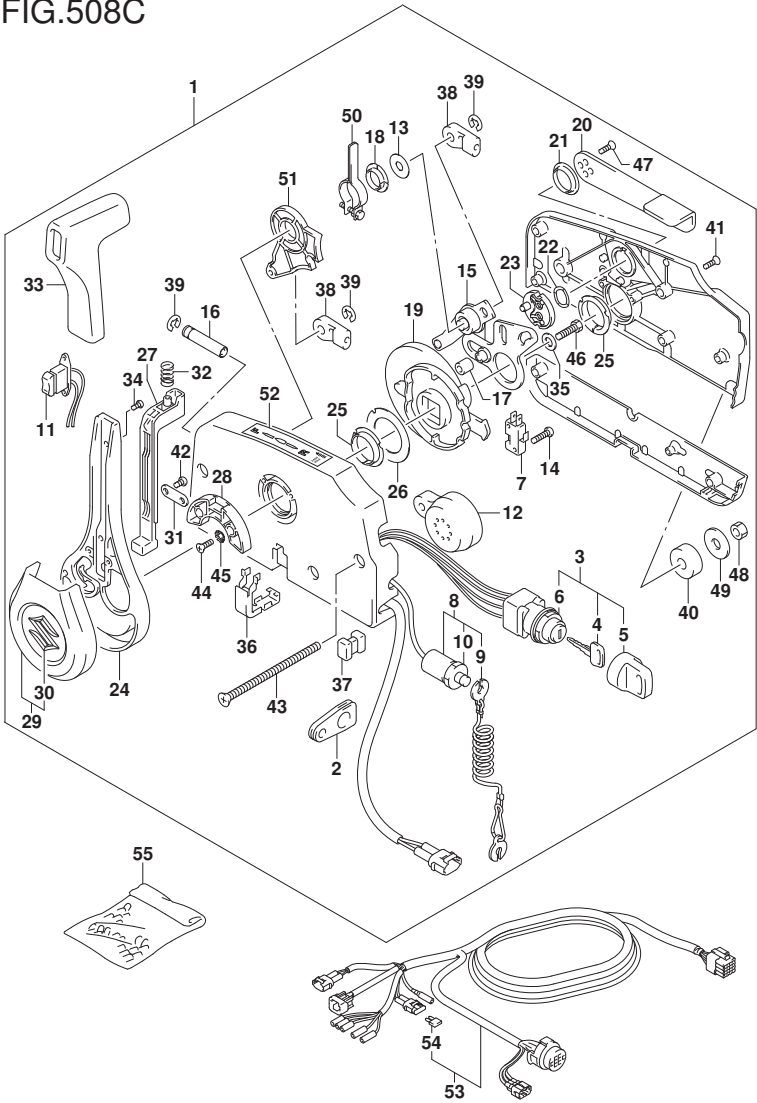


FIG.508C (1-L-7) OPT:REMOTE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
53	36620-94L01	WIRE ASSY, REMOTE CONTROL	1	
54	09481-10501	.FUSE (10A)	1	
55	36990-87D00	TERMINAL & SLEEVE SET	1	

NOTE : (DF25ATH,DF30ATH):(020,021)

DF25ATH P01
DF30ATH P01

FIG.508D

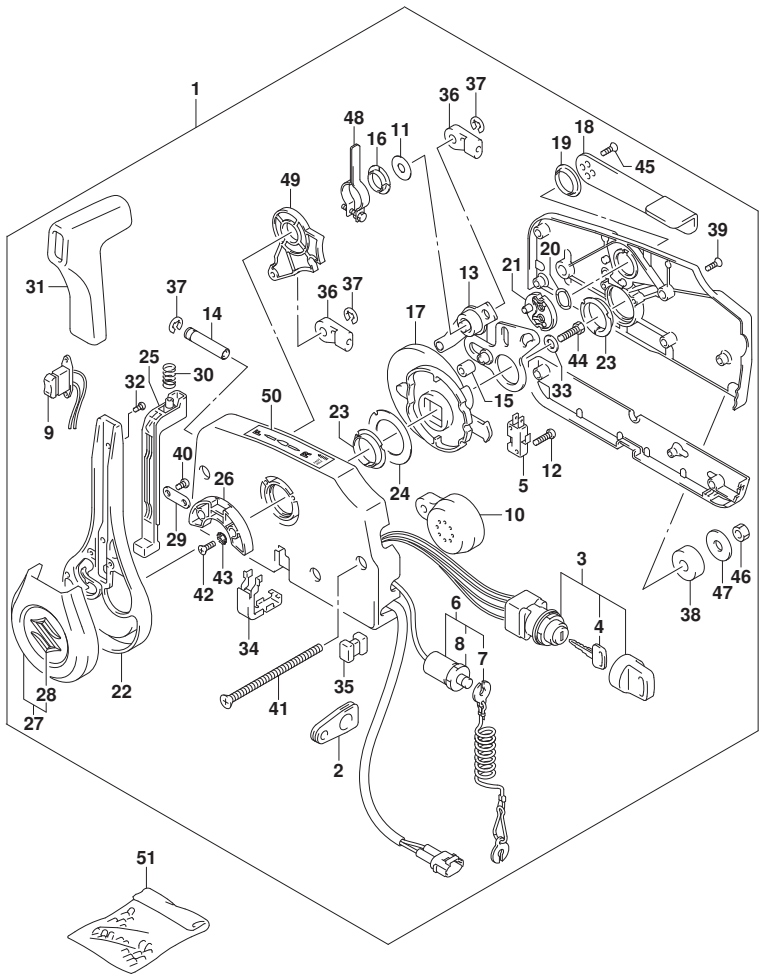


FIG.508D (1-L-8) OPT:REMOTE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-93J70	REMOTE CONTROL ASSY	1	
2	36628-92E01	..GROMMET, WIRING HARNESS	1	
3	37110-93J20	..SWITCH ASSY, IGNITION	1	
4-1	37141-99E00	..KEY (931)	2	
4-2	37141-99E10	..KEY (932)	2	
4-3	37141-99E20	..KEY (933)	2	
4-4	37141-99E30	..KEY (934)	2	
4-5	37141-99E40	..KEY (935)	2	
4-6	37141-99E50	..KEY (936)	2	
4-7	37141-99E60	..KEY (937)	2	
4-8	37141-99E70	..KEY (938)	2	
4-9	37141-99E80	..KEY (939)	2	
4-10	37141-99E90	..KEY (940)	2	
4-11	37141-99EA0	..KEY (941)	2	
4-12	37141-99EB0	..KEY (942)	2	
5	37721-93J91	..SWITCH ASSY, NEUTRAL	1	
6	37820-93J11	..SWITCH ASSY, EMERGENCY	1	
7	37823-92E02	..PLATE ASSY, EMERGENCY SW LOCK	1	
8	37826-92J10	..NUT	1	
9	37850-96L00	..SWITCH ASSY, PTT	1	
10	38500-93J90	..BUZZER, WARNING	1	
11	67212-95600	..WASHER	1	
12	67296-92E11	..SCREW, NEUTRAL SWITCH (3X15)	2	
13	67220-95630	..PLATE ASSY	1	
14	67223-99E10	..KNOB, BRAKE ADJUST	1	
15	67229-95600	..ROLLER	1	
16	67232-95600	..BUSH	1	
17	67238-87D00	..GEAR, DRIVE	1	
18	67241-99E11	..LEVER, FREE THROTTLE	1	
19	67243-95600	..BUSH	1	
20	67244-95600	..WAVE WASHER	1	

NOTE : (DF25AT,DF25ATH,DF30AT,DF30ATH):022

FIG.508D

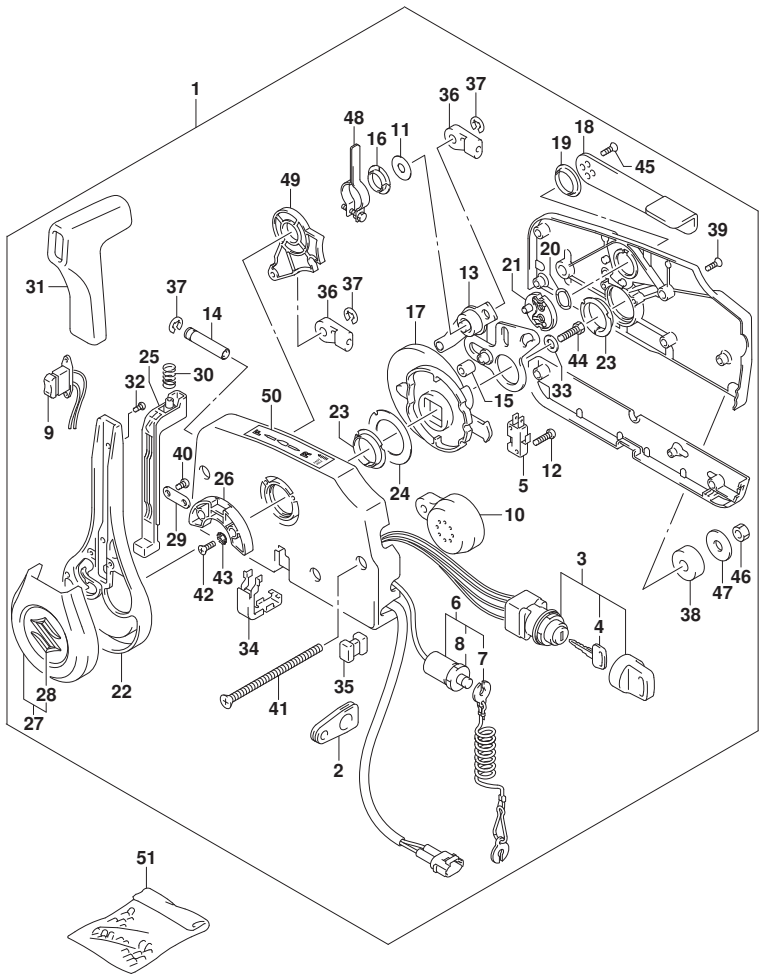


FIG.508D (1-L-9) OPT:REMOTE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
21	67245-95600	.DRUM, FREE THROTTLE	1	
22	67251-96L00	.LEVER, HANDLE	1	
23	67252-95600	.BUSH	2	
24	67253-95600	.WASHER	1	
25	67255-96L00	.NEUTRAL LOCK ARM	1	
26	67256-95600	.HOLDER, NEUTRAL LOCK	1	
27	67257-96L00	.CAP ASSY, LEVER	1	
28	77811-54GB0-0PG	..EMBLEM, RR MARK S (CHROME)	1	
29	67258-99E00	.BRACKET	1	
30	67259-87D00	.SPRING, NEUTRAL ARM	1	
31	67261-96L00	.GRIP	1	
32	67296-96L10	.SCREW	2	
33	67264-95600	.WASHER	1	
34	67267-96L00	.COVER, WIRE SUB ASSY	1	
35	67273-95601	.SPACER	1	
36	67275-95600	.END, CABLE	2	
37	67292-94300	.E RING	3	
38	67294-95600	.SPACER	3	
39	67296-90J20	.SCREW	5	
40	67296-96L00	.SCREW	2	
41	67296-95630	.SCREW	3	
42	67296-95610	.SCREW	2	
43	67297-95600	.WASHER	2	
44	09100-08232	.BOLT (8X30)	1	
45	67269-96L10	.SCREW (5X12)	2	
46	09140-06020	.NUT	3	
47	67288-94320	.WAHSER (6.5X24X2)	3	
48	67224-96L00	.ARM, BRAKE ASSY	1	
49	67238-96L00	.GEAR, SHIFT ASSY	1	
50	67284-94L10	.MARK, HANDLE LEVER	1	

NOTE : (DF25AT,DF25ATH,DF30AT,DF30ATH):022

FIG.508D

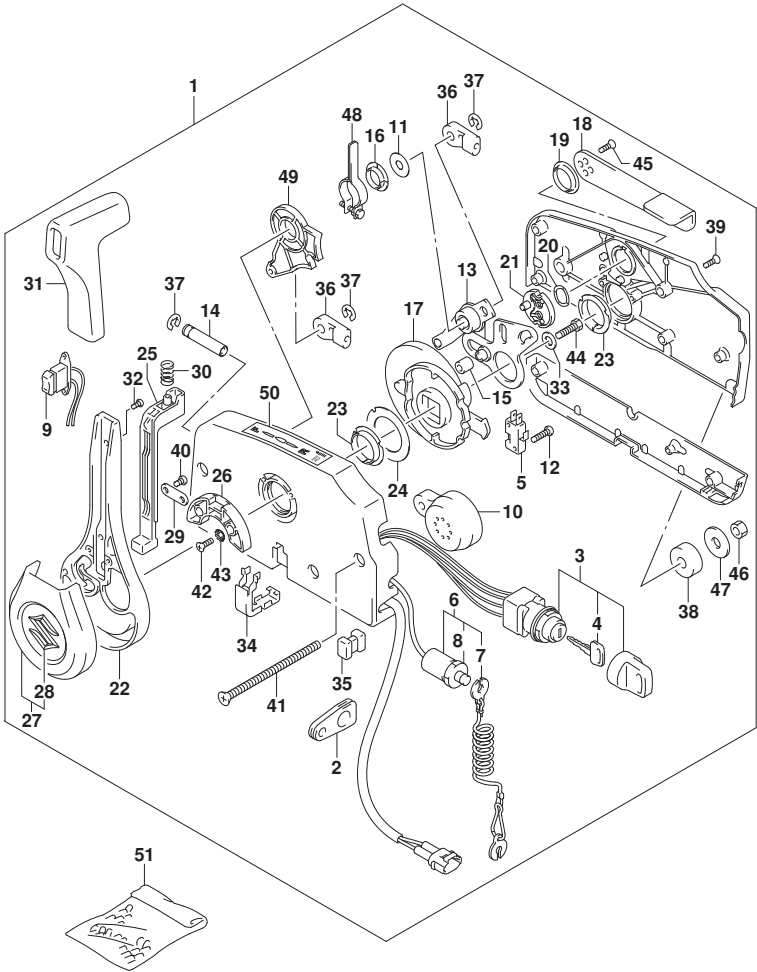


FIG.508D (1-L-10) OPT:REMOTE CONTROL (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
51	36990-87D00	TERMINAL & SLEEVE SET	1	

NOTE : (DF25AT,DF25ATH,DF30AT,DF30ATH):022

DF25AT P01
DF25ATH P01
DF30AT P01
DF30ATH P01

FIG.513A

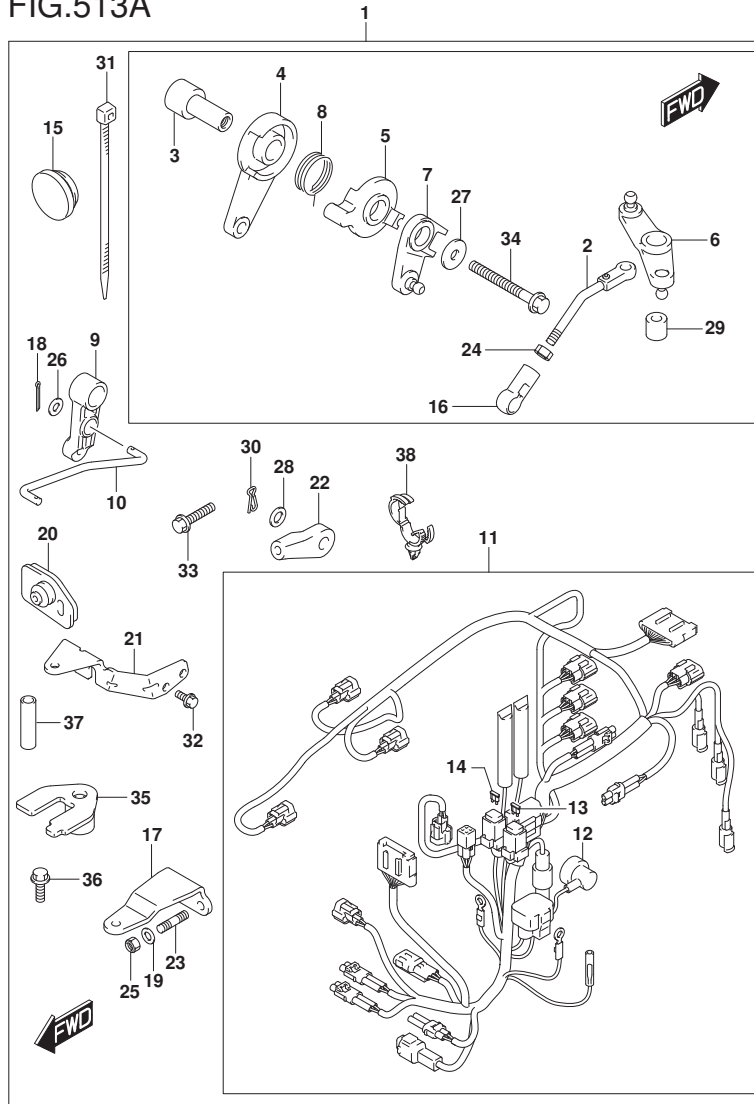


FIG.513A (1-L-11) OPT:REMOTE CONTROL PARTS (DF25A,DF30A,DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67130-94L03	PARTS SET, R/CON	1	
2	13510-94L00	.ROD, THROTTLE NO.1	1	
3	19116-94L00	.BRACKET, THROTTLE LEVER	1	
4	19120-99J11	.LEVER, THROTTLE CONTROL	1	
5	19122-99J00	.LEVER, INTERLINK THROTTLE NO.2	1	
6	19140-94L01	.LEVER, THROTTLE NO.2	1	
7	19140-94L20	.LEVER, THR CONTROL NO.2	1	
8	19185-99J00	.SPRING, THROTTLE LEVER	1	
9	21110-94L00	.LEVER, CLUTCH CONTROL	1	
10	23115-94L10	.LINK, CLUTCH LEVER	1	
11	36610-94L21	.HARNES ASSY, WIRING	1	
12	36618-43410	..CAP, OIL PRESSURE SWITCH	1	
13	09481-10501	..FUSE (10A)	1	
14	09481-30501	..FUSE (30A)	1	
15	37163-89L00	.PLUG, STARTING SWITCH HOLE	1	
16	19131-95502	.CONNECTOR	1	
17	43755-94L00	ATTACHMENT, STEERING BRACKET	1	
18	09204-01002	.PIN	2	
19	09160-08082	.WASHER (8.5X16X1.2)	2	
20	61124-94L10	.GROMMET, R/CON CABLE	1	
21	67341-94L00	.HOLDER, R/CON CABLE	1	
22	67467-89J01	.CONNECTOR	2	
23	09108-08286	.STUD BOLT	2	
24	09140-05005	.NUT (M5)	1	
25	09159-08059	.NUT (M8)	2	
26	09160-05029	.WASHER (5.5X12X0.8)	2	
27	09160-06046	.WASHER (6.5X20X1.5)	2	
28	09160-06055	.WASHER (7X12X1.0)	2	
29	09180-06230	.SPACER (6.2X12.6X12.5)	1	
30	09385-06012	.CLIP	2	
31	09407-14407	.CLAMP (L:145)	2	
32	01547-06167	.BOLT	2	
33	01550-06257	.BOLT (6X25)	1	
34	01550-06557	.BOLT	1	
35	67343-94L00	.STOPPER, R/CON CABLE	1	

FIG.513A

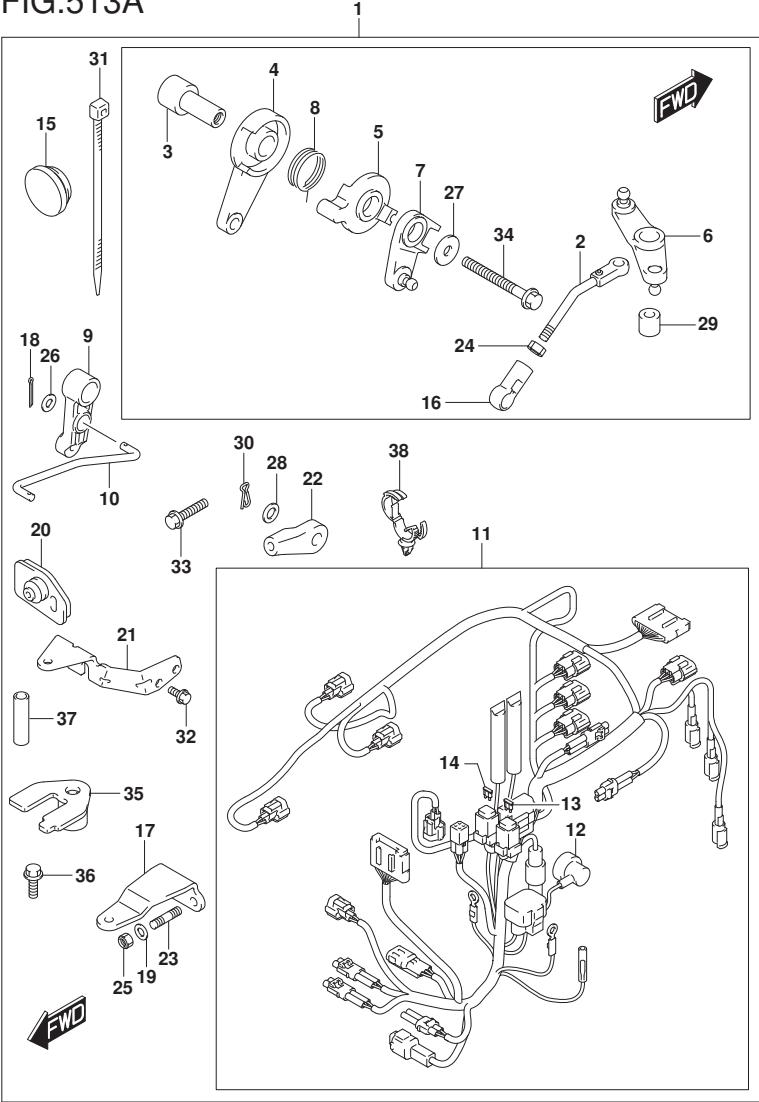


FIG.513A (1-L-12) OPT:REMOTE CONTROL PARTS (DF25A,DF30A,DF30AQ)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
36	09116-06225	.BOLT (6X16)	1	
37	09352-70104-600	.HOSE (7X10.2X600)	2	L:600->14
38	09403-20308	.CLAMP	1	

DF25A P01
DF30A P40
DF30AQ P01

FIG.513B

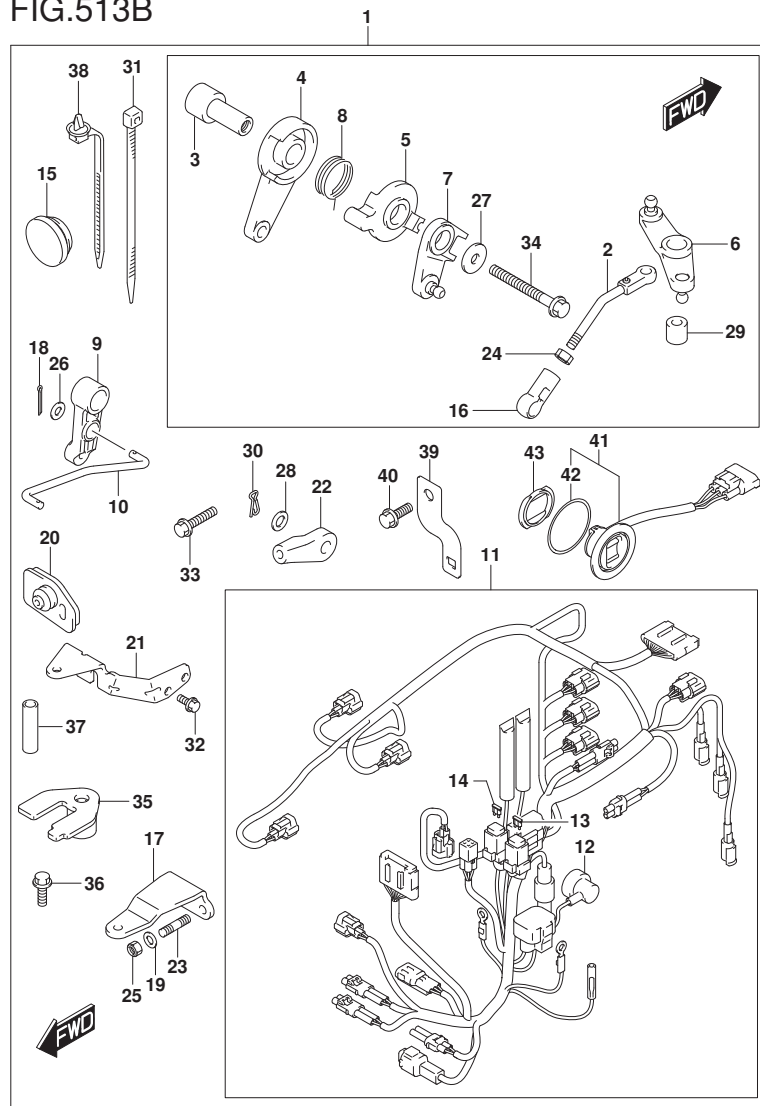


FIG.513B (1-L-13) OPT:REMOTE CONTROL PARTS (DF25ATH,DF30ATH)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67130-94L13	PARTS SET, R/CON	1	
2	13510-94L00	.ROD, THROTTLE NO.1	1	
3	19116-94L00	.BRACKET, THROTTLE LEVER	1	
4	19120-99J11	.LEVER, THROTTLE CONTROL	1	
5	19122-99J00	.LEVER, INTERLINK THROTTLE NO.2	1	
6	19140-94L01	.LEVER, THROTTLE NO.2	1	
7	19140-94L20	.LEVER, THR CONTROL NO.2	1	
8	19185-99J00	.SPRING, THROTTLE LEVER	1	
9	21110-94L00	.LEVER, CLUTCH CONTROL	1	
10	23115-94L10	.LINK, CLUTCH LEVER	1	
11	36610-94L42	.HARNES ASSY, WIRING	1	
12	36618-43410	..CAP, OIL PRESSURE SWITCH	1	
13	09481-10501	..FUSE (10A)	1	
14	09481-30501	..FUSE (30A)	1	
15	37163-89L00	.PLUG, STARTING SWITCH HOLE	1	
16	19131-95502	.CONNECTOR	1	
17	43755-94L00	ATTACHMENT, STEERING BRACKET	1	
18	09204-01002	.PIN	2	
19	09160-08082	.WASHER (8.5X16X1.2)	2	
20	61124-94L10	.GROMMET, R/CON CABLE	1	
21	67341-94L00	.HOLDER, R/CON CABLE	1	
22	67467-89J01	.CONNECTOR	2	
23	09108-08286	.STUD BOLT	2	
24	09140-05005	.NUT (M5)	1	
25	09159-08059	.NUT (M8)	2	
26	09160-05029	.WASHER (5.5X12X0.8)	2	
27	09160-06046	.WASHER (6.5X20X1.5)	2	
28	09160-06055	.WASHER (7X12X1.0)	2	
29	09180-06230	.SPACER (6.2X12.6X12.5)	1	
30	09385-06012	.CLIP	2	
31	09407-14407	.CLAMP (L:145)	2	
32	01547-06167	.BOLT	2	
33	01550-06257	.BOLT (6X25)	1	
34	01550-06557	.BOLT	1	
35	67343-94L00	.STOPPER, R/CON CABLE	1	

FIG. 513B

1

38 31 15 3 4 8 5 7 27 34 2 6 29 24 16 18 9 26 10 20 21 37 32 35 17 36 23 19 25 30 28 22 40 39 43 41 42 11 12 13 14

FWD

FWD

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
36	09116-06225	.BOLT (6X16)	1	
37	09352-70104-600	.HOSE (7X10.2X600)	2	L:600->14
38	36991-94L00	.CLAMP, HARNESS	1	
39	36617-94L00	.BRACKET, HARNESS	1	
40	01550-06167	.BOLT (6X16)	1	
41	37850-92J00	.SWITCH ASSY, PTT	1	
42	37856-92J00	..TAPE, PTT SWITCH	1	
43	37857-92J01	.BUSH, PTT SWITCH	1	

DF30ATH P01

FIG.515A

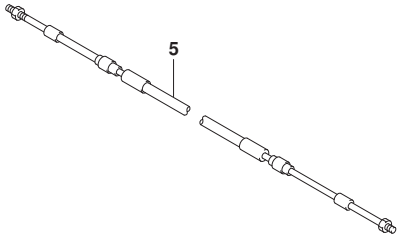
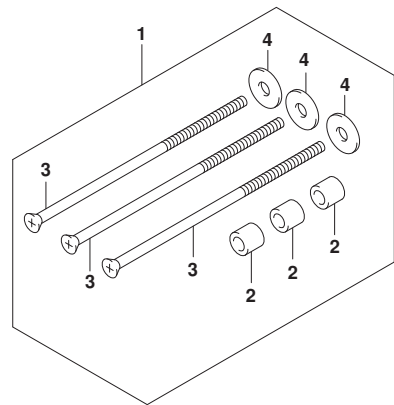


FIG.515A (2-B-2) OPT:REMOCON CABLE

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67140-95601	KIT, R/CON (NA12S)	1	
2	09180-06105	.SPACER (6.1X10X14)	3	
3	67296-95640	.SCREW (L:165)	3	
4	67288-94320	.WAHSER (6.5X24X2)	3	
5-1	67320-93J00	CABLE ASSY, REMOCON (2.4M)	1	
5-2	67320-93J10	CABLE ASSY, REMOCON (3.1M)	1	
5-3	67320-93J20	CABLE ASSY, REMOCON (3.7M)	1	
5-4	67320-93J30	CABLE ASSY, REMOCON (4.2M)	1	
5-5	67320-93J40	CABLE ASSY, REMOCON (4.8M)	1	
5-6	67320-93J50	CABLE ASSY, REMOCON (5.4M)	1	
5-7	67320-93J60	CABLE ASSY, REMOCON (6.1M)	1	
5-8	67320-93J70	CABLE ASSY, REMOCON (6.7M)	1	
5-9	67320-93J80	CABLE ASSY, REMOCON (7.3M)	1	

FIG.517A

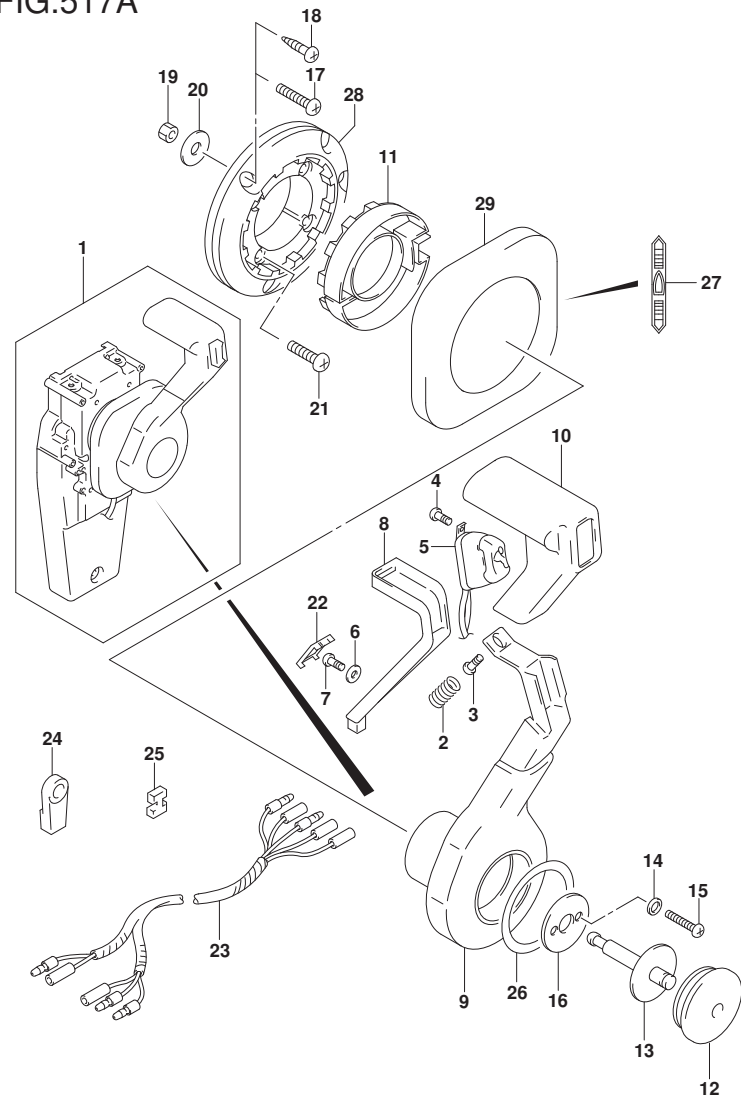


FIG.517A (2-B-3) OPT:CONCEALED REMOCON (1) (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-93J34	REMOTE CONTROL ASSY, CONCEAL	1	
2	67298-92E50	.SPRING	1	
3	67296-94310	.SCREW	1	
4	67295-92E10	.SCREW (3X12)	2	
5	37850-92E27	.SWITCH ASSY, PTT	1	
6	67288-92E60	.WASHER	1	
7	09125-04021	.SCREW (4X20)	1	
8	67255-92E50	.ARM, NEUTRAL LOCK	1	
9	67251-92E50	.LEVER, HANDLE	1	
10	67261-92E50	.GRIP	1	
11	67256-92E50	.HOLDER, NEUTRAL LOCK	1	
12	67257-92E00	.CAP, LEVER	1	
13	67242-92E50	.SHAFT, FREE ACC	1	
14	67288-92E20	.WASHER	6	
15	67296-88D10	.SCREW (5X16)	2	
16	67288-92E70	.WASHER	1	
17	67296-88D20	.SCREW (6X35)	3	
18	67295-92E50	.SCREW (6X30)	3	
19	67287-92E50	.NUT	3	
20	09160-06104	.WASHER (6.5X24X2)	3	
21	67296-88D30	.SCREW (5X30)	4	
22	67254-92E50	.COVER, LOCK ARM	1	
23	36890-93J01	.WIRE, NEUTRAL & PTT SW	1	
24	67275-95600	.END, CABLE	2	
25	67273-95601	.SPACER	1	
26	67283-92E50	.DECAL, LEVER	1	
27	67284-92E50	.DECAL, CLUTCH	1	
28	67274-92E50	.BASE	1	

NOTE : DF25AR,DF25AT,(DF25ATH,DF30ATH):022,DF30AR,DF30AT

FIG.517A

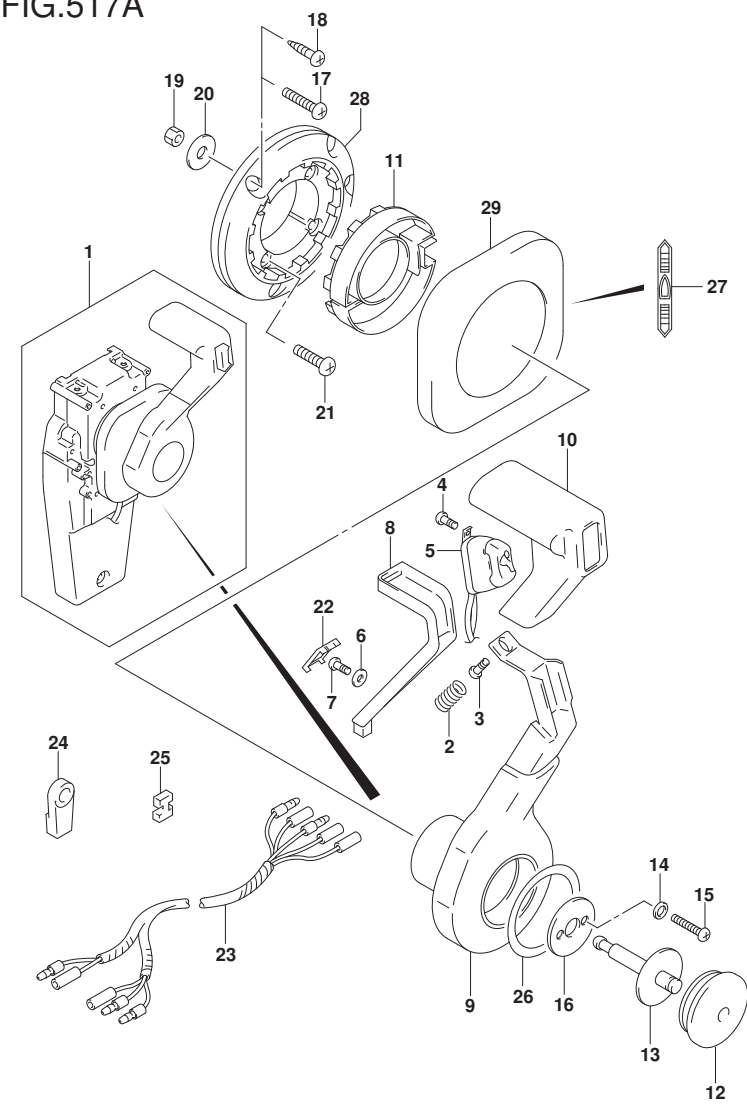


FIG.517A (2-B-4) OPT:CONCEALED REMOCON (1) (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
29	67211-92E50	.COVER	1	

NOTE : DF25AR,DF25AT,(DF25ATH,DF30ATH):022,DF30AR,DF30AT

- DF25AR P01
- DF25AT P01
- DF25ATH P01
- DF30AR P01
- DF30AT P01
- DF30ATH P01

FIG.518A

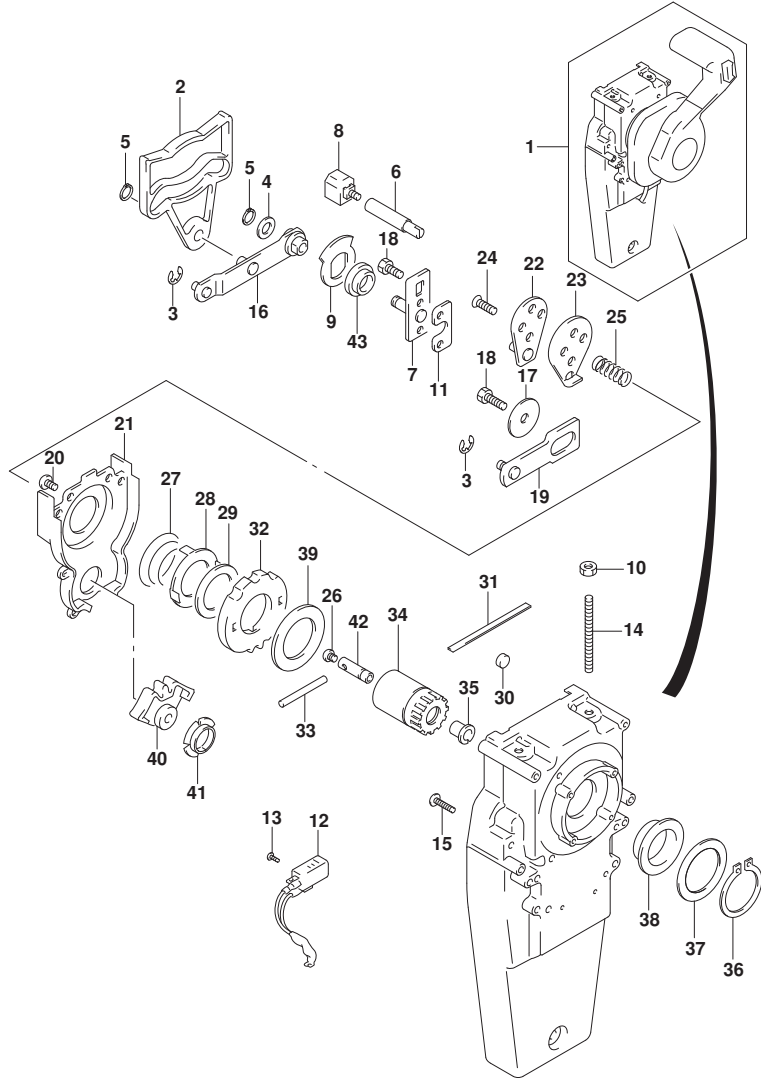


FIG.518A (2-B-5) OPT:CONCEALED REMOCON (2) (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-93J34	REMOTE CONTROL ASSY, CONCEAL	1	
2	67222-92E50	.DUEL PLATE	1	
3	67292-94300	.E RING	3	
4	67288-92E10	.WASHER	1	
5	67291-92E00	.SNAP RING	2	
6	67223-92E50	.BRAKE ADJUST	1	
7	67221-92E50	.HOLDER ASSY	1	
8	67224-92E50	.BRAKE SHOE ASSY	1	
9	67225-92E50	.DISC, BRAKE	1	
10	09140-06020	.NUT	2	
11	67294-92E00	.SPACER	1	
12	37721-95500	.SWITCH ASSY, NEUTRAL	1	
13	67296-92E11	.SCREW, NEUTRAL SWITCH (3X15)	2	
14	67226-92E10	.BOLT, STOPPER	2	
15	67296-92E20	.SCREW (5X25)	2	
16	67240-92E50	.THROTTLE ARM ASSY	1	
17	67228-92E00	.WASHER	1	
18	67286-92E00	.BOLT (6X18)	3	
19	67230-92E00	.SHIFT ARM ASSY	1	
20	09125-05042	.SCREW (5X10)	11	
21	67234-92E00	.CASE, GEAR	1	
22	67245-92E00	.LEVER ASSY, THROTTLE	1	
23	67227-92E00	.STOPPER	1	
24	67296-92E00	.SCREW	2	
25	67225-92E00	.SPRING	1	
26	09125-04004	.SCREW (4X6)	1	
27	67233-92E00	.SPRING	1	
28	67235-92E00	.PLATE, SHIFT LOCK	1	
29	67239-92E10	.PLATE, SHIFT PIN	1	
30	67236-92E00	.ROLLER	1	
31	67237-92E01	.SPRING	5	
32	67238-92E50	.GEAR, DRIVE	1	

NOTE : DF25AR,DF25AT,(DF25ATH,DF30ATH):022,DF30AR,DF30AT

FIG.518A

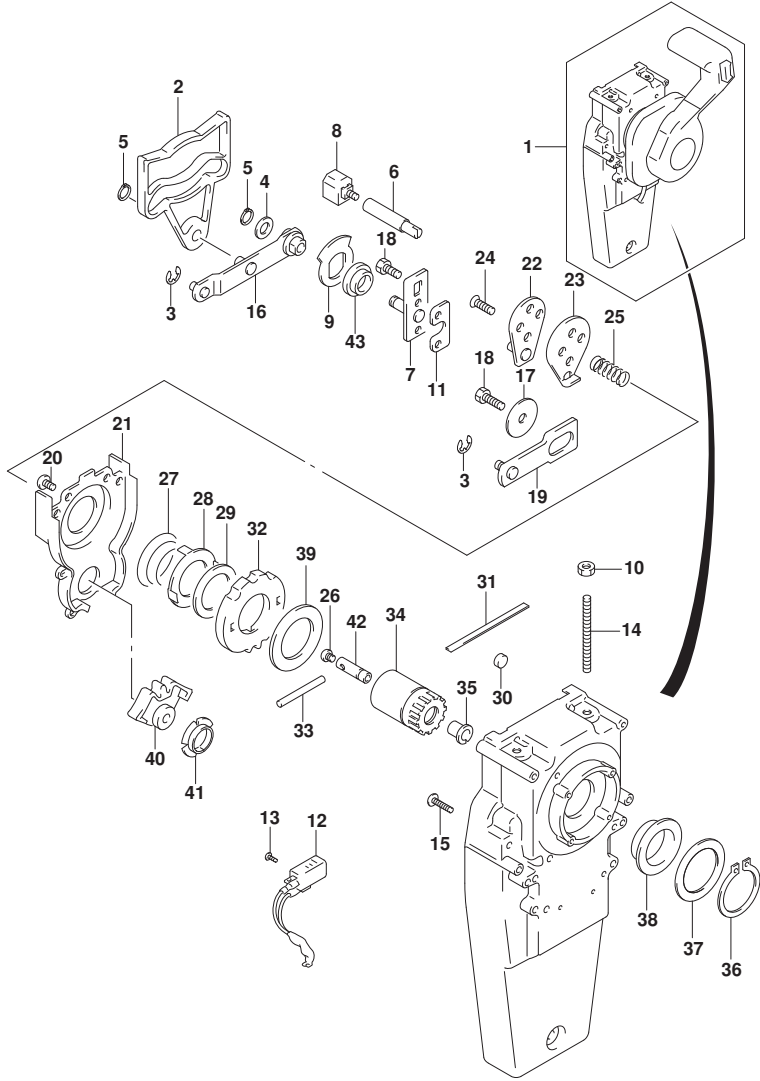


FIG.518A (2-B-6) OPT:CONCEALED REMOCON (2) (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
33	67239-92E00	.PIN	1	
34	67246-92E50	.SHAFT, DRIVE	1	
35	67252-92E00	.BUSH	1	
36	67291-92E10	.SNAP RING	1	
37	67253-92E10	.WASHER	1	
38	67252-92E10	.BUSH	1	
39	67253-95600	.WASHER	1	
40	67231-92E00	.GEAR, SHIFT	1	
41	67232-95600	.BUSH	1	
42	67241-92E50	.ROD, FREE ACC	1	
43	67232-92E50	.BUSH	1	

NOTE : DF25AR,DF25AT,(DF25ATH,DF30ATH):022,DF30AR,DF30AT

DF25AR P01
DF25AT P01
DF25ATH P01
DF30AR P01
DF30AT P01
DF30ATH P01

FIG.519A

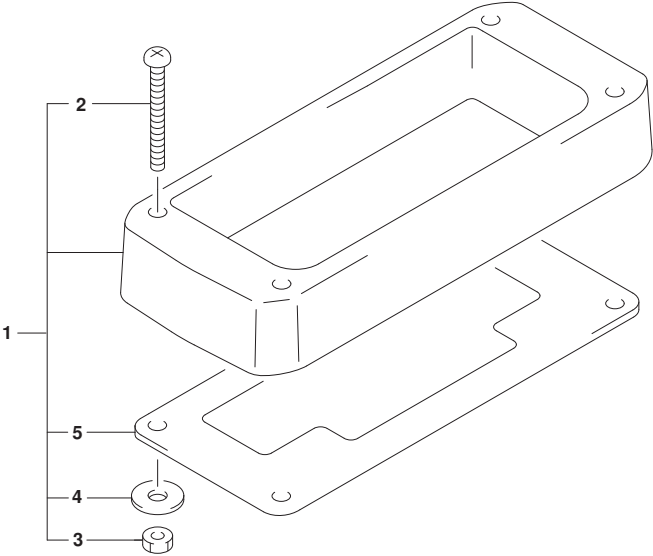


FIG.519A (2-B-7) OPT:REMOTE CONTROL SPACER (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67500-88L00	KIT, R/CON SPACER SINGLE	1	
2	09125-05135	.SCREW (5X65)	4	
3	09140-05005	.NUT (M5)	4	
4	09160-05029	.WASHER (5.5X12X0.8)	4	
5	67273-88L00	.GROMMET, R/CON SINGLE	1	

NOTE : DF25A,DF25AR,DF25AT:022,DF25ATH,DF30A,DF30AR,DF30AT:022,
DF30ATH,DF30AQ

- DF25A P01
- DF25AR P01
- DF25AT P01
- DF25ATH P01
- DF30A P40
- DF30AQ P01
- DF30AR P01
- DF30AT P01
- DF30ATH P01

FIG.521A

FIG.521A (2-B-8) OPT:HARNESS (021:(DF25AR,DF25AT,DF30AR,DF30AT))

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	36620-93J12	WIRE ASSY, REMOCON EXT (L:2000)	1	
1-2	36620-93J42	WIRE ASSY, REMOCON EXT (L:3000)	1	

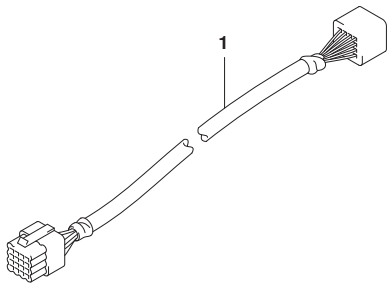


FIG.521B

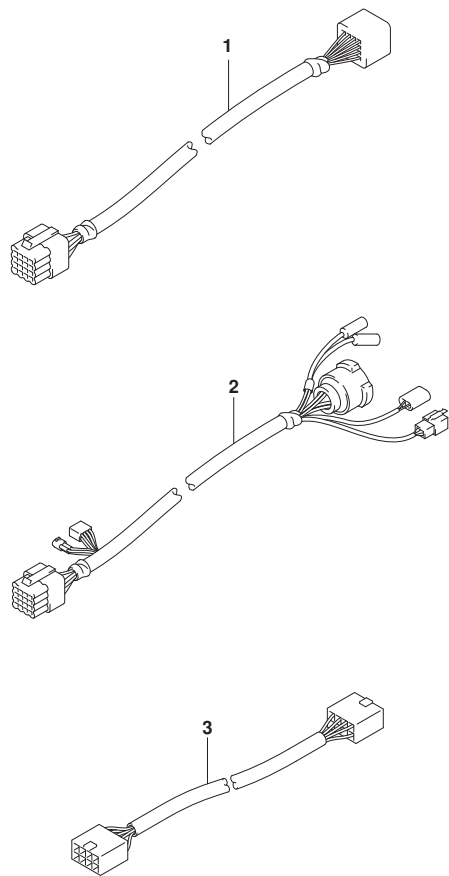


FIG.521B (2-B-9) OPT:HARNESS (022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1-1	36620-93J12	WIRE ASSY, REMOCON EXT (L:2000)	1	
1-2	36620-93J42	WIRE ASSY, REMOCON EXT (L:3000)	1	
2	36621-93J00	WIRE, R/CON ADAPTER	1	
3	36667-96L20	WIRE, GAUGE EXT	1	

FIG.530A

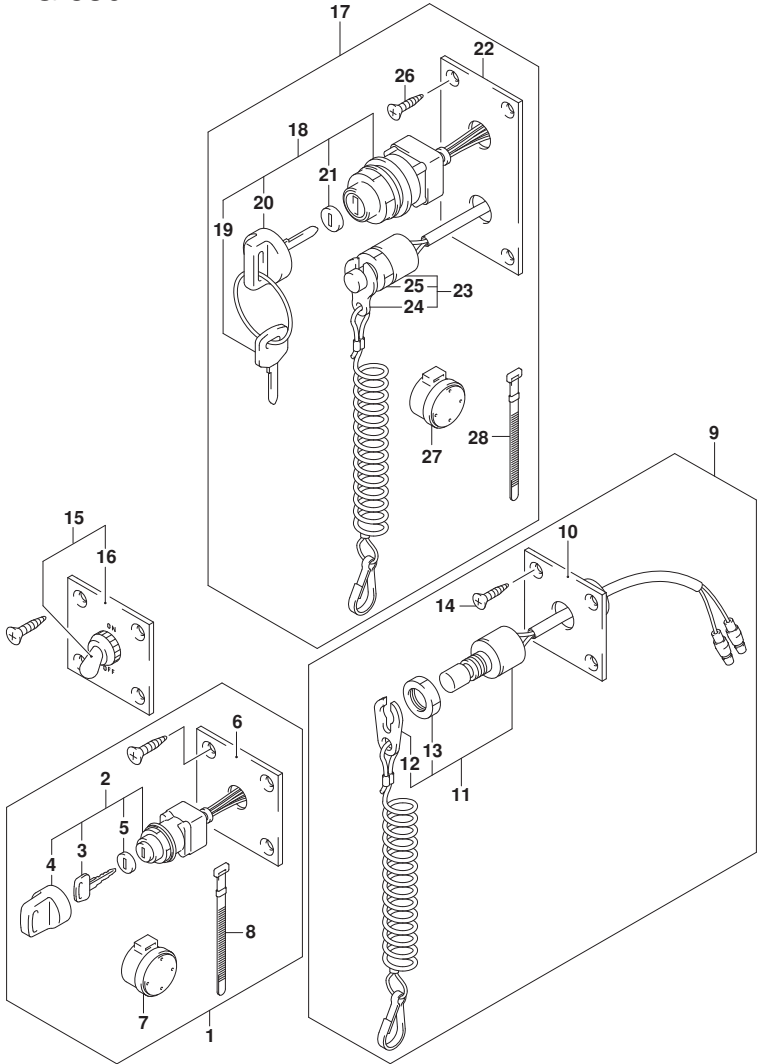


FIG.530A (2-B-10) OPT:SWITCH (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	37100-96J01	PANEL ASSY, IGNITION SWITCH	1	
2	37110-93J02	..SWITCH ASSY, IGNITION	1	
3-1	37141-99E00	..KEY (931)	2	
3-2	37141-99E10	..KEY (932)	2	
3-3	37141-99E20	..KEY (933)	2	
3-4	37141-99E30	..KEY (934)	2	
3-5	37141-99E40	..KEY (935)	2	
3-6	37141-99E50	..KEY (936)	2	
3-7	37141-99E60	..KEY (937)	2	
3-8	37141-99E70	..KEY (938)	2	
3-9	37141-99E80	..KEY (939)	2	
3-10	37141-99E90	..KEY (940)	2	
3-11	37141-99EA0	..KEY (941)	2	
3-12	37141-99EB0	..KEY (942)	2	
4	37143-99E01	..CAP, KEY	1	
5	37149-93J00	..CAP, CYLINDER BODY	1	
6	37139-99E00	..PANEL, IGNITION SW	1	
7	38500-93J90	..BUZZER, WARNING	1	
8	09407-08401	..CLAMP (L:80)	1	
9	37803-93J06	PANEL ASSY, EMERGENCY SW	1	
10	37825-99E10	..PANEL, EMERGENCY STOP SW	1	
11	37820-93J11	..SWITCH ASSY, EMERGENCY	1	
12	37823-92E02	..PLATE ASSY, EMERGENCY SW LOCK	1	
13	37826-92J10	..NUT	1	
14	03122-05169	..SCREW	4	
15	37210-93J00	PANEL ASSY, LIGHTING SW	1	
16	37212-93J00	..PANEL, LIGHTING SW	1	
17	37100-96J27	PANEL ASSY, ENGINE SWITCH	1	
18	37110-93J02	..SWITCH ASSY, IGNITION	1	

NOTE : (020,021):(DF25AT,DF30AR,DF30AT),021:DF25AR

FIG.530A

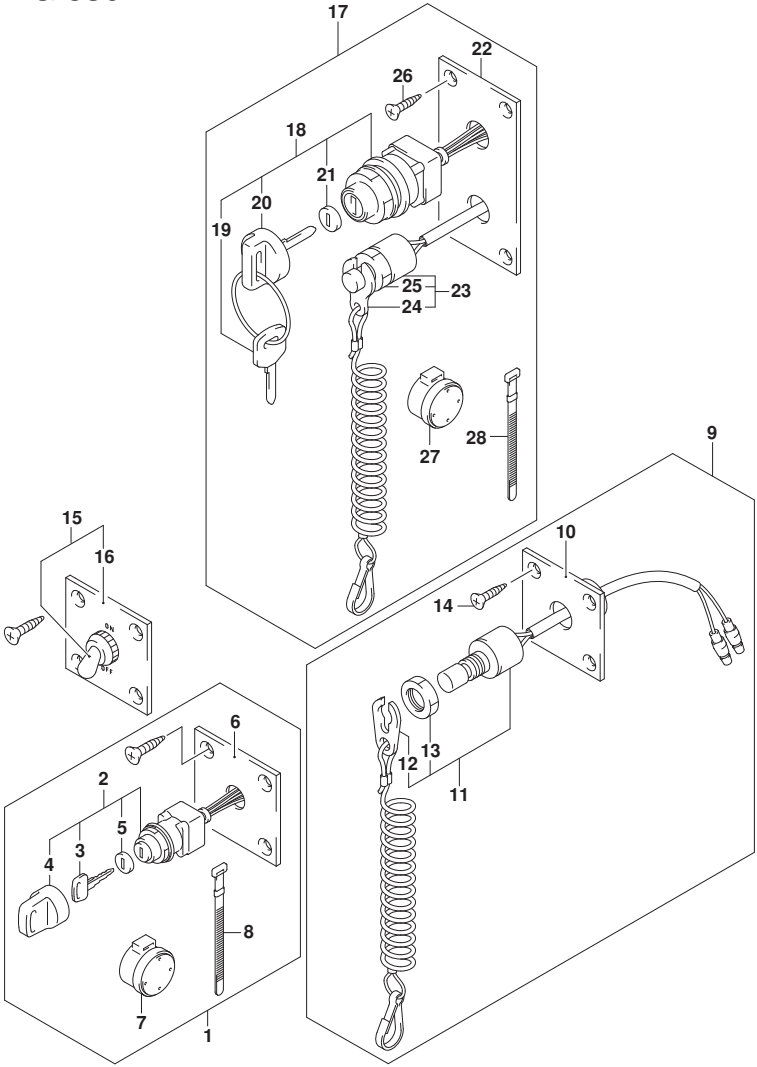


FIG.530A (2-B-11) OPT:SWITCH (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
19-1	37141-99E00	..KEY (931)	2	
19-2	37141-99E10	..KEY (932)	2	
19-3	37141-99E20	..KEY (933)	2	
19-4	37141-99E30	..KEY (934)	2	
19-5	37141-99E40	..KEY (935)	2	
19-6	37141-99E50	..KEY (936)	2	
19-7	37141-99E60	..KEY (937)	2	
19-8	37141-99E70	..KEY (938)	2	
19-9	37141-99E80	..KEY (939)	2	
19-10	37141-99E90	..KEY (940)	2	
19-11	37141-99EA0	..KEY (941)	2	
19-12	37141-99EB0	..KEY (942)	2	
20	37143-99E01	..CAP, KEY	1	
21	37149-93J00	..CAP, CYLINDER BODY	1	
22	37139-99E40	..PANEL, IGNITION SWITCH	1	
23	37820-93J11	..SWITCH ASSY, EMERGENCY	1	
24	37823-92E02	..PLATE ASSY, EMERGENCY SW	1	
		LOCK		
25	37826-92J10	..NUT	1	
26	03121-0516A	..SCREW	4	
27	38500-93J90	..BUZZER, WARNING	1	
28	09407-08401	..CLAMP (L:80)	1	

NOTE : (020,021):(DF25AT,DF30AR,DF30AT),021:DF25AR

FIG.530B

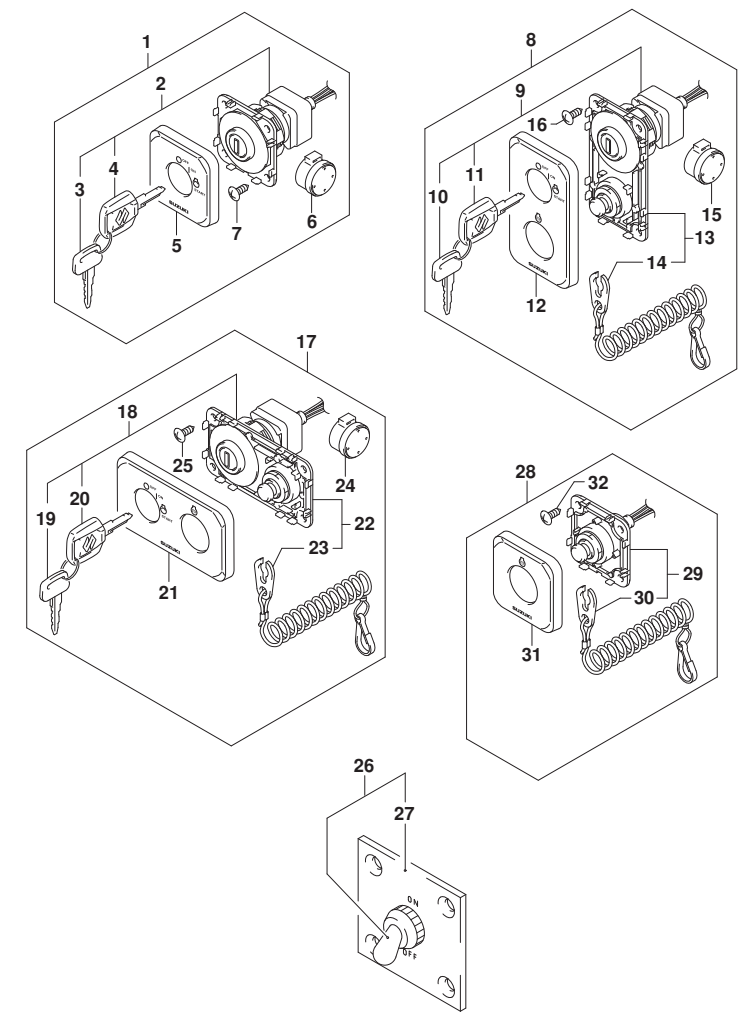


FIG.530B (2-B-12) OPT:SWITCH (022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	37100-98L00	PANEL ASSY, MAIN SWITCH	1	
2	37110-98L00	.SWITCH ASSY, MAIN	1	
3-1	37141-98LA0	..KEY (941)	1	
3-2	37141-98LB0	..KEY (942)	1	
3-3	37141-98L00	..KEY (931)	1	
3-4	37141-98L10	..KEY (932)	1	
3-5	37141-98L20	..KEY (933)	1	
3-6	37141-98L30	..KEY (934)	1	
3-7	37141-98L40	..KEY (935)	1	
3-8	37141-98L50	..KEY (936)	1	
3-9	37141-98L60	..KEY (937)	1	
3-10	37141-98L70	..KEY (938)	1	
3-11	37141-98L80	..KEY (939)	1	
3-12	37141-98L90	..KEY (940)	1	
4-1	37141-99EA0	..KEY (941)	1	
4-2	37141-99EB0	..KEY (942)	1	
4-3	37141-99E00	..KEY (931)	1	
4-4	37141-99E10	..KEY (932)	1	
4-5	37141-99E20	..KEY (933)	1	
4-6	37141-99E30	..KEY (934)	1	
4-7	37141-99E40	..KEY (935)	1	
4-8	37141-99E50	..KEY (936)	1	
4-9	37141-99E60	..KEY (937)	1	
4-10	37141-99E70	..KEY (938)	1	
4-11	37141-99E80	..KEY (939)	1	
4-12	37141-99E90	..KEY (940)	1	
5	37138-98L00	.COVER, MAIN SW PANEL	1	
6	38500-93J90	.BUZZER, WARNING	1	
7	03142-05169	.SCREW	4	
8	37100-98L10	PANEL ASSY, MAIN SWITCH	1	
9	37110-98L00	.SWITCH ASSY, MAIN	1	

FIG.530B

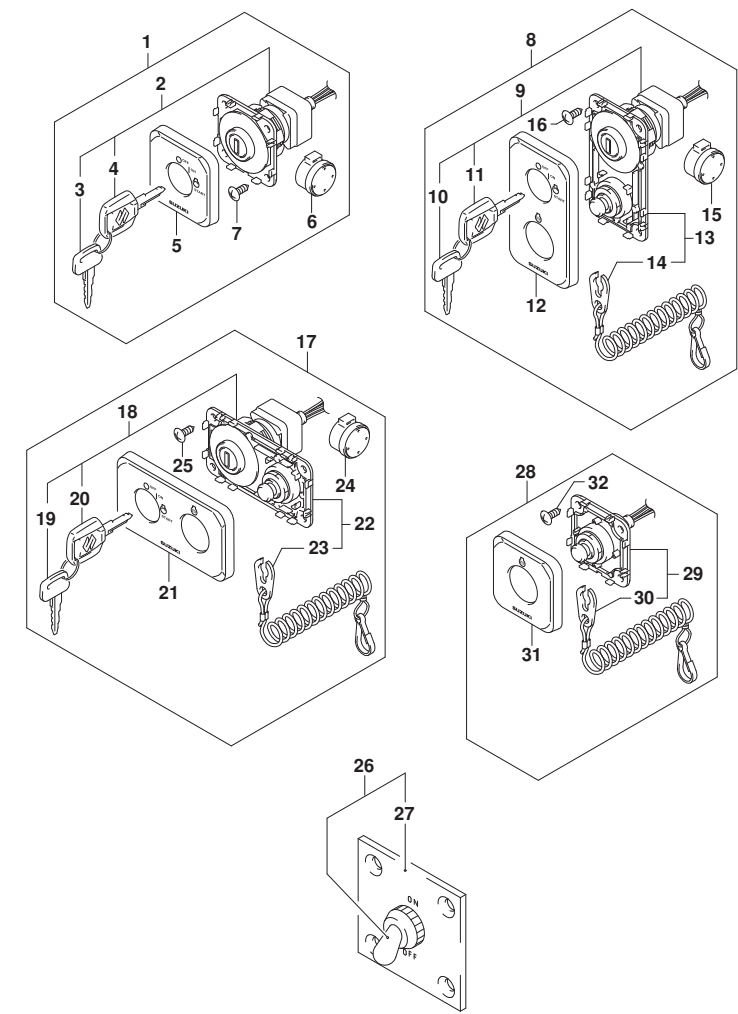


FIG.530B (2-B-13) OPT:SWITCH (022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
10-1	37141-98LA0	..KEY (941)	1	
10-2	37141-98LB0	..KEY (942)	1	
10-3	37141-98L00	..KEY (931)	1	
10-4	37141-98L10	..KEY (932)	1	
10-5	37141-98L20	..KEY (933)	1	
10-6	37141-98L30	..KEY (934)	1	
10-7	37141-98L40	..KEY (935)	1	
10-8	37141-98L50	..KEY (936)	1	
10-9	37141-98L60	..KEY (937)	1	
10-10	37141-98L70	..KEY (938)	1	
10-11	37141-98L80	..KEY (939)	1	
10-12	37141-98L90	..KEY (940)	1	
11-1	37141-99EA0	..KEY (941)	1	
11-2	37141-99EB0	..KEY (942)	1	
11-3	37141-99E00	..KEY (931)	1	
11-4	37141-99E10	..KEY (932)	1	
11-5	37141-99E20	..KEY (933)	1	
11-6	37141-99E30	..KEY (934)	1	
11-7	37141-99E40	..KEY (935)	1	
11-8	37141-99E50	..KEY (936)	1	
11-9	37141-99E60	..KEY (937)	1	
11-10	37141-99E70	..KEY (938)	1	
11-11	37141-99E80	..KEY (939)	1	
11-12	37141-99E90	..KEY (940)	1	
12	37138-98L10	..COVER, MAIN SW PANEL VERT	1	
13	37820-98L00	..SWITCH ASSY, EMERGENCY	1	
14	37823-98L00	..PLATE, EMERGENCY SW LOCK	1	
15	38500-93J90	..BUZZER, WARNING	1	
16	03142-05169	..SCREW	4	
17	37100-98L20	PANEL ASSY, MAIN SWITCH HORIZ	1	
18	37110-98L00	..SWITCH ASSY, MAIN	1	

FIG.530B

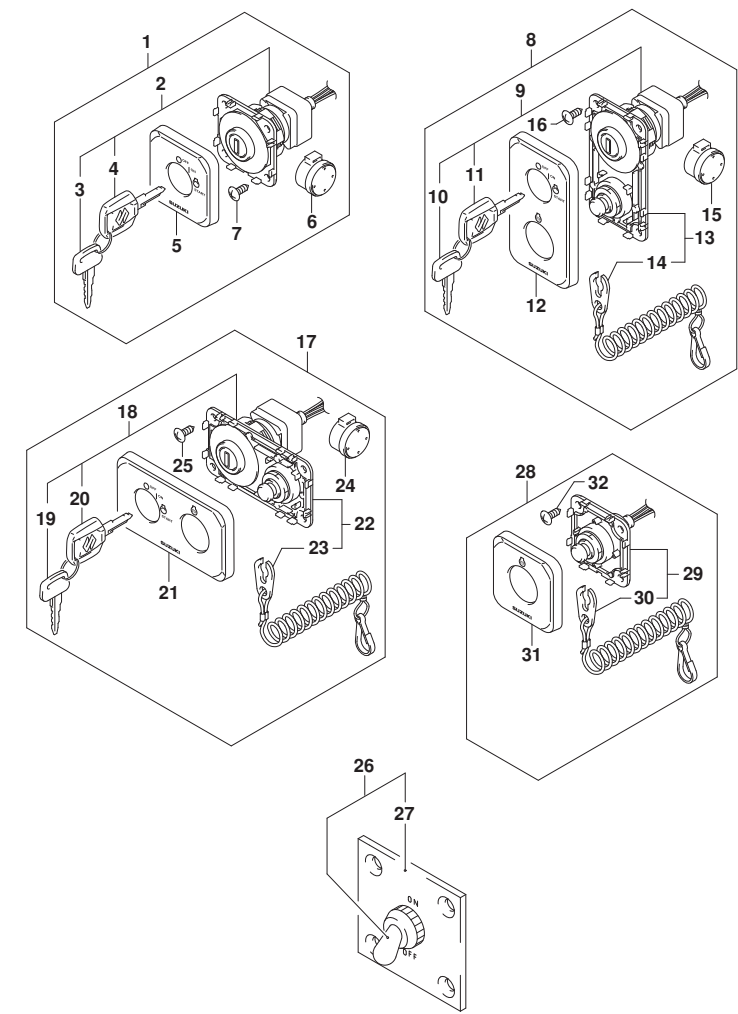


FIG.530B (2-B-14) OPT:SWITCH (022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
19-1	37141-98LA0	..KEY (941)	1	
19-2	37141-98LB0	..KEY (942)	1	
19-3	37141-98L00	..KEY (931)	1	
19-4	37141-98L10	..KEY (932)	1	
19-5	37141-98L20	..KEY (933)	1	
19-6	37141-98L30	..KEY (934)	1	
19-7	37141-98L40	..KEY (935)	1	
19-8	37141-98L50	..KEY (936)	1	
19-9	37141-98L60	..KEY (937)	1	
19-10	37141-98L70	..KEY (938)	1	
19-11	37141-98L80	..KEY (939)	1	
19-12	37141-98L90	..KEY (940)	1	
20-1	37141-99EA0	..KEY (941)	1	
20-2	37141-99EB0	..KEY (942)	1	
20-3	37141-99E00	..KEY (931)	1	
20-4	37141-99E10	..KEY (932)	1	
20-5	37141-99E20	..KEY (933)	1	
20-6	37141-99E30	..KEY (934)	1	
20-7	37141-99E40	..KEY (935)	1	
20-8	37141-99E50	..KEY (936)	1	
20-9	37141-99E60	..KEY (937)	1	
20-10	37141-99E70	..KEY (938)	1	
20-11	37141-99E80	..KEY (939)	1	
20-12	37141-99E90	..KEY (940)	1	
21	37138-98L20	..COVER, MAIN SW PANEL HORIZ	1	
22	37820-98L00	..SWITCH ASSY, EMERGENCY	1	
23	37823-98L00	..PLATE, EMERGENCY SW LOCK	1	
24	38500-93J90	..BUZZER, WARNING	1	
25	03142-05169	..SCREW	4	
26	37210-93J00	PANEL ASSY, LIGHTING SW	1	
27	37212-93J00	..PANEL, LIGHTING SW	1	
28	37803-98L00	PANEL ASSY, EMERGENCY SW	1	
29	37820-98L00	..SWITCH ASSY, EMERGENCY	1	
30	37823-98L00	..PLATE, EMERGENCY SW LOCK	1	
31	37832-98L00	..COVER, EMERGENCY SW PANEL	1	
32	03142-05169	..SCREW	4	

FIG.544A

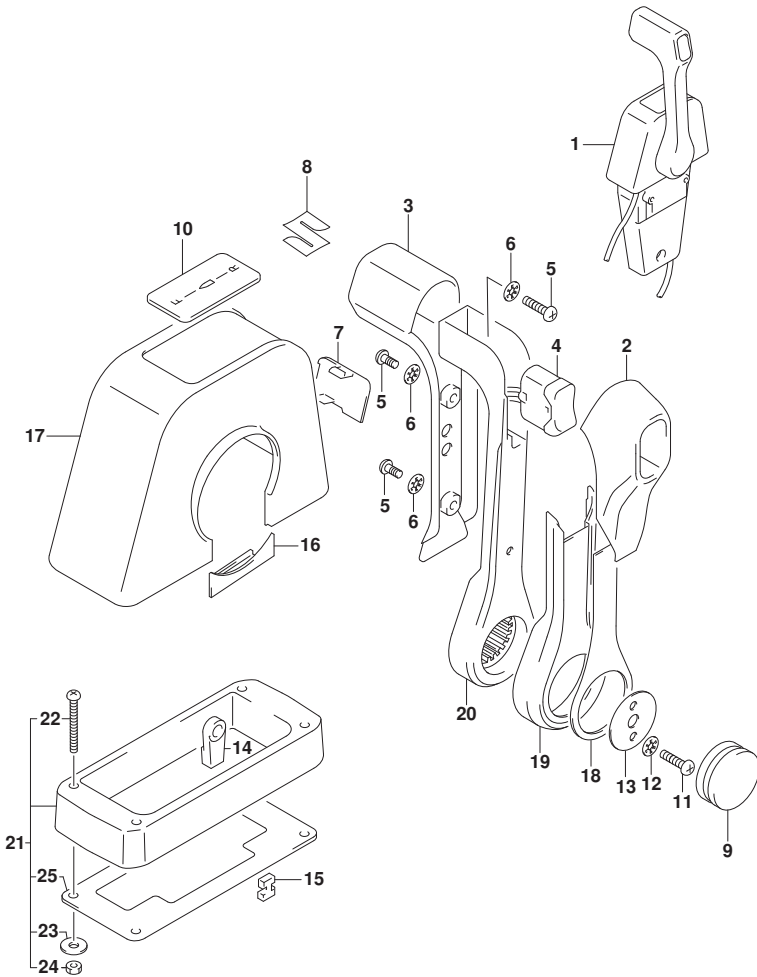


FIG.544A (2-C-2) OPT:REMOTE CONTROL ASSY SINGLE (1) (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-88L01	REMOTE CONTROL ASSY, SINGLE	1	
2	67261-88L10	.GRIP, REMOCON NO.2	1	
3	67261-88L00	.GRIP, REMOCON NO.1	1	
4	37850-88L00	.SWITCH ASSY, GRIP PTT	1	
5	67296-88L00	.SCREW	3	
6	67288-92E20	.WASHER	3	
7	67212-88L00	.COVER, PLUG	1	
8	68111-88L00	.EMBLEM, MARK	1	
9	67257-88L00	.CAP, REMOCON LEVER	1	
10	67281-88L00	.DECAL	1	
11	67296-92E60	.SCREW	2	
12	67288-92E60	.WASHER	2	
13	67253-92E00	.WASHER	1	
14	67275-95600	.END, CABLE	2	
15	67273-95601	.SPACER	1	
16	67271-88L10	.COVER, REMOCON LEVER LOWER	1	
17	67211-88L00	.COVER	1	
18	67264-88L00	.COVER, LEVER DESIGN	1	
19	67264-88L10	.COVER, LEVER PLATING	1	
20	67251-88L00	.LEVER, HANDLE	1	
21	67500-88L00	KIT, R/CON SPACER SINGLE	1	
22	09125-05135	.SCREW (5X65)	4	
23	09160-05029	.WASHER (5.5X12X0.8)	4	
24	09140-05005	.NUT (M5)	4	
25	67273-88L00	.GROMMET, R/CON SINGLE	1	

NOTE : DF25AR,DF25AT,DF30AR,DF30AT,(DF25ATH,DF30ATH):022

FIG.545A

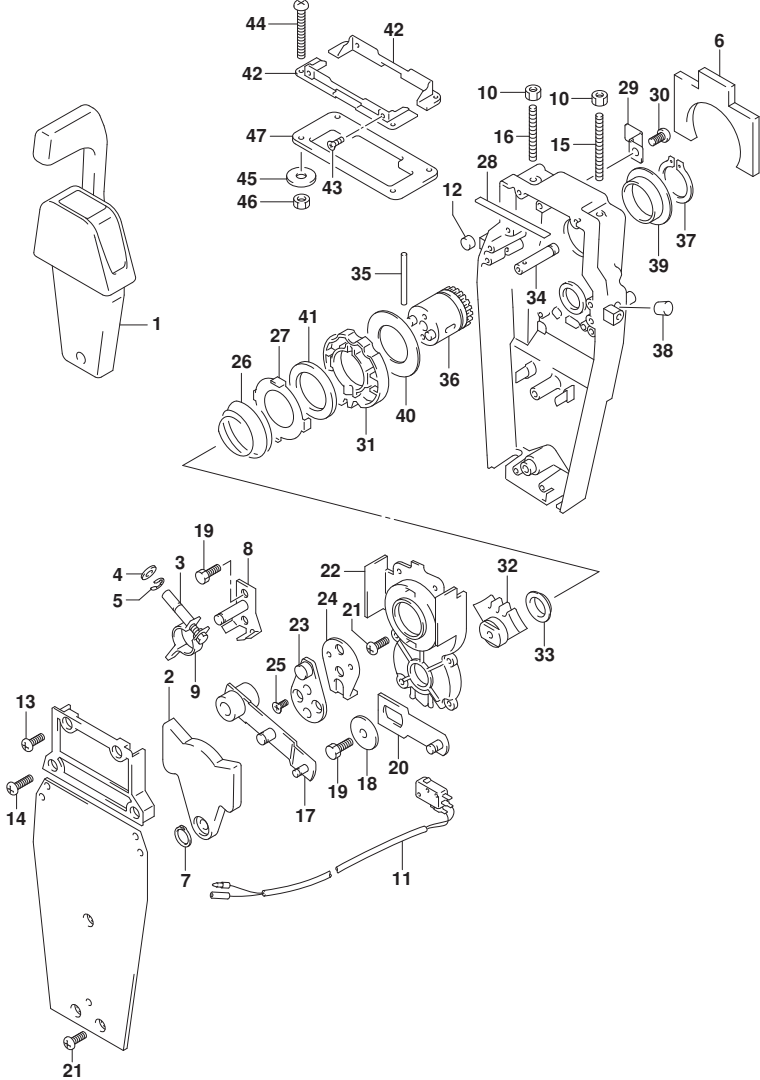


FIG.545A (2-C-3) OPT:REMOTE CONTROL ASSY SINGLE (2) (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	67200-88L01	REMOTE CONTROL ASSY, SINGLE	1	
2	67222-92E00	.DUEL PLATE	1	
3	67223-92E00	.BRAKE ADJUST	1	
4	67288-92E00	.WASHER	1	
5	67292-94300	.E RING	4	
6	67272-88L00	.GOM SEAL, WATERPROOF	1	
7	67291-92E00	.SNAP RING	1	
8	67221-92E00	.SHIFT ASSY	1	
9	67224-92E00	.BRAKE ARM ASSY	1	
10	09140-06020	.NUT	2	
11	37721-88L01	.SWITCH ASSY, NEUTRAL	1	
12	67236-92E00	.ROLLER	1	
13	67296-88D10	.SCREW (5X16)	2	
14	67296-92E20	.SCREW (5X25)	2	
15	67226-92E00	.BOLT, STOPPER	1	
16	67226-92E10	.BOLT, STOPPER	1	
17	67240-92E00	.THROTTLE ARM ASSY	1	
18	67228-92E00	.WASHER	1	
19	67286-92E00	.BOLT (6X18)	3	
20	67230-88L00	ARM ASSY, REMOCON SHIFT	1	
21	09125-05042	.SCREW (5X10)	10	
22	67234-88L00	.CASE, REMOCON GEAR	1	
23	67245-92E00	.LEVER ASSY, THROTTLE	1	
24	67227-92E00	.STOPPER	1	
25	09126-06006	.SCREW (6X20)	2	
26	67233-92E00	.SPRING	1	
27	67235-92E00	.PLATE, SHIFT LOCK	1	
28	67237-92E01	.SPRING	5	
29	67269-92E01	.BRACKET	1	
30	67296-88D10	.SCREW (5X16)	1	
31	67238-88L00	.GEAR, REMOCON DRIVE	1	
32	67231-88L00	.GEAR, REMOCON SHIFT	1	

NOTE : DF25AR,DF25AT,DF30AR,DF30AT,(DF25ATH,DF30ATH):022

FIG.545A

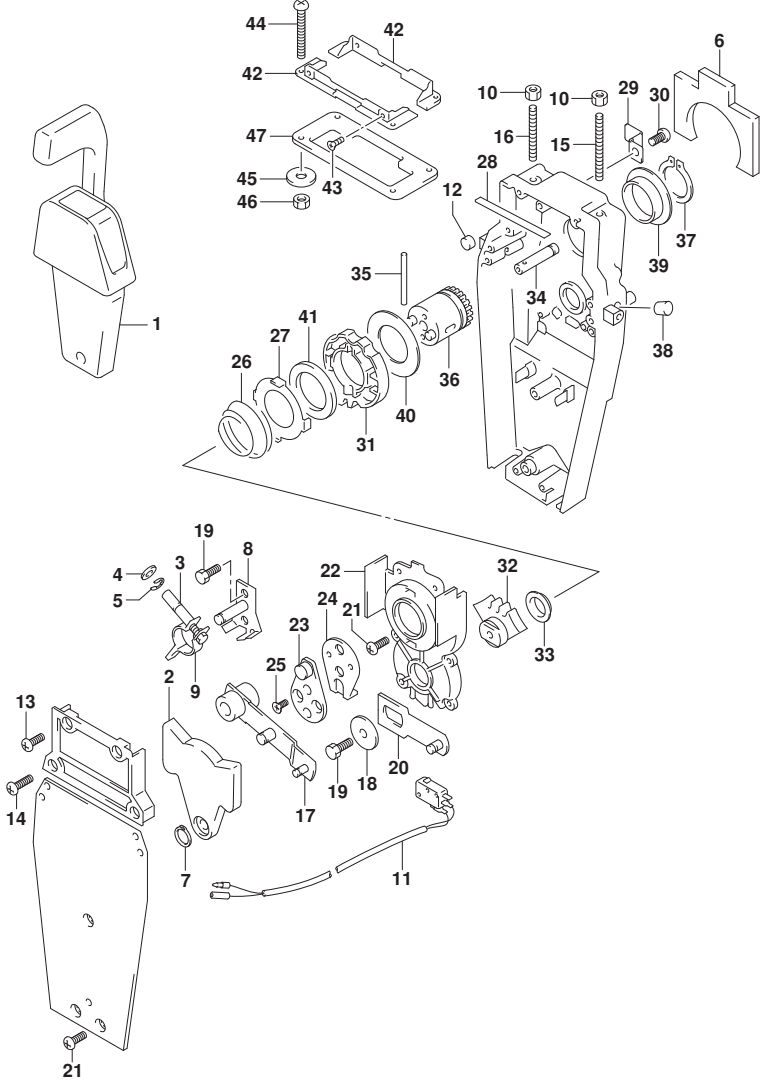


FIG.545A (2-C-4) OPT:REMOTE CONTROL ASSY SINGLE (2) (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
33	67232-88L00	.BUSH, SHIFT GEAR	1	
34	67241-88L00	.ROD, REMOCON FREE ACCEL	1	
35	67239-92E00	.PIN	1	
36	67246-88L00	.SHAFT, REMOCON DRIVE	1	
37	67291-92E10	.SNAP RING	1	
38	67243-92E00	.CAP, HOLE	1	
39	67252-88L00	.BUSH, REMOCON DRIVE SHAFT	1	
40	67253-88L00	.WASHER, REMOCON DRIVE SHAFT	1	
41	67239-92E10	.PLATE, SHIFT PIN	1	
42	67274-88L00	.FLANGE, COVER BASE	2	
43	67296-95610	.SCREW	4	
44	67296-92E30	.SCREW	4	
45	09160-05024	.WASHER (5.5X16X1.5)	4	
46	67287-92E00	.NUT (M5)	4	
47	67273-88L00	.GROMMET, R/CON SINGLE	1	

NOTE : DF25AR,DF25AT,DF30AR,DF30AT,(DF25ATH,DF30ATH):022

FIG.553A

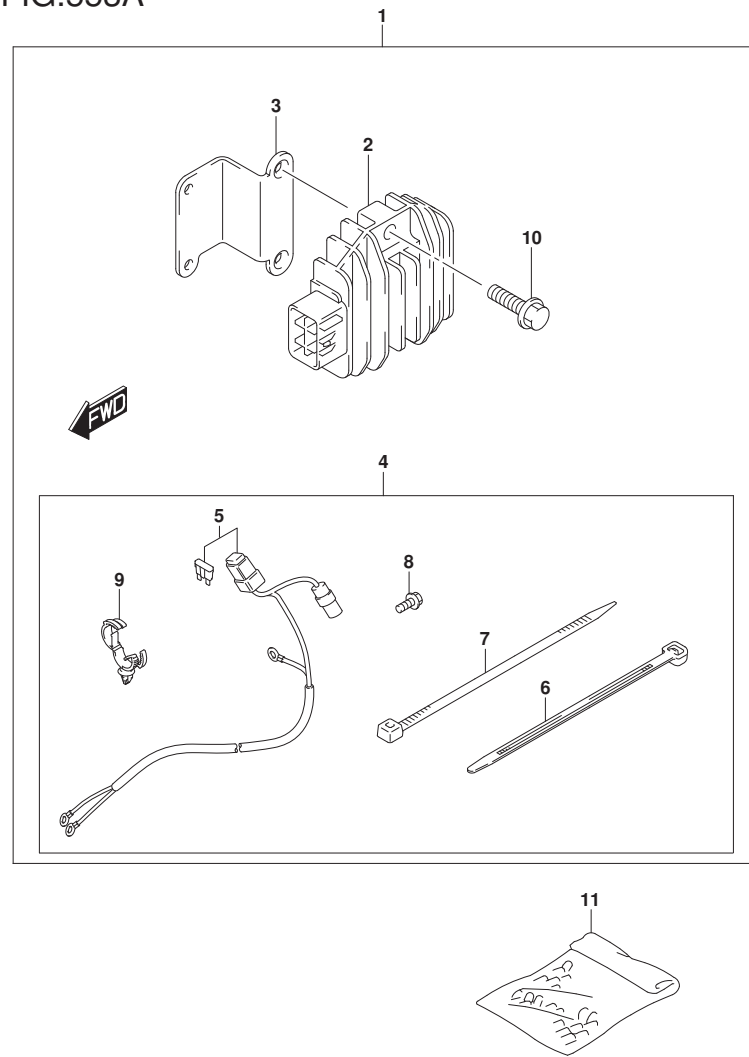


FIG.553A (2-C-5) OPT:ELECTRICAL (MANUAL STARTER)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	32000-94L03	KIT, BATTERY CHARGING	1	
2	32800-88L01	.RECTIFIER & REGULATOR ASSY	1	
3	32815-94L01	.BRACKET, RECTIFIER	1	
4	39600-94L01	.RECEPTACLE SET	1	
5	36740-94L00	..WIRE ASSY, BATTERY CHARGING	1	
6	09407-14403	..CLAMP (L:125)	2	
7	09407-14407	..CLAMP (L:145)	3	
8	01550-06127	..BOLT	1	
9	09403-20308	..CLAMP	1	
10	01550-06207	..BOLT (6X20)	2	
11	36990-87D00	TERMINAL & SLEEVE SET	1	

FIG.561A

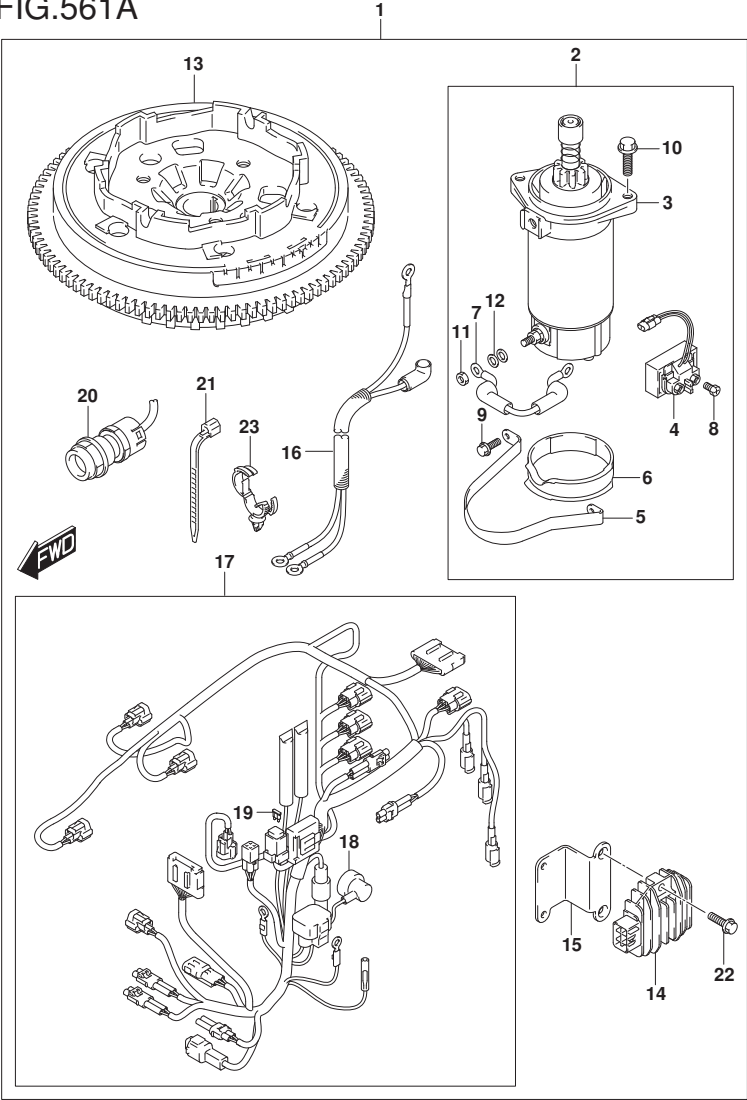


FIG.561A (2-C-6) OPT:STARTING MOTOR (MANUAL STARTER)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	31000-94L09	STARTER SET, ELECTRIC	1	
2	31101-94L04	..MOTOR SET, STARTER	1	
3	31100-94402	..MOTOR ASSY, STARTING	1	
4	31800-94L01	..RELAY ASSY, STARTER MOTOR	1	
5	31912-94L00	..BAND, STARTER MOTOR	1	
6	31918-94402	..DAMPER, LOWER	1	
7	33820-89E01	..CABLE, PLUS TERM TO RELAY	1	
8	09128-06093	..SCREW (6X8)	2	
9	01550-06167	..BOLT (6X16)	2	
10	01550-08257	..BOLT (8X25)	2	
11	08310-00067	..NUT	1	
12	08321-01067	..LOCK WASHER	1	
13	32102-94L10	..FLYWHEEL, MAGNETO	1	
14	32800-88L01	..RECTIFIER & REGULATOR ASSY	1	
15	32815-94L01	..BRACKET, RECTIFIER	1	
16	33810-94L01	..CABLE, STARTER	1	
17	36610-94L11	..HARNESS ASSY, WIRING	1	
18	36618-43410	..CAP, OIL PRESSURE SWITCH	1	
19	09481-30501	..FUSE (30A)	1	
20	37161-89L02	..SWITCH ASSY, STARTER MOTOR	1	
21	09407-18402	..CLAMP (L:165)	1	
22	01550-06207	..BOLT (6X20)	2	
23	09403-20308	..CLAMP	1	

FIG.575A

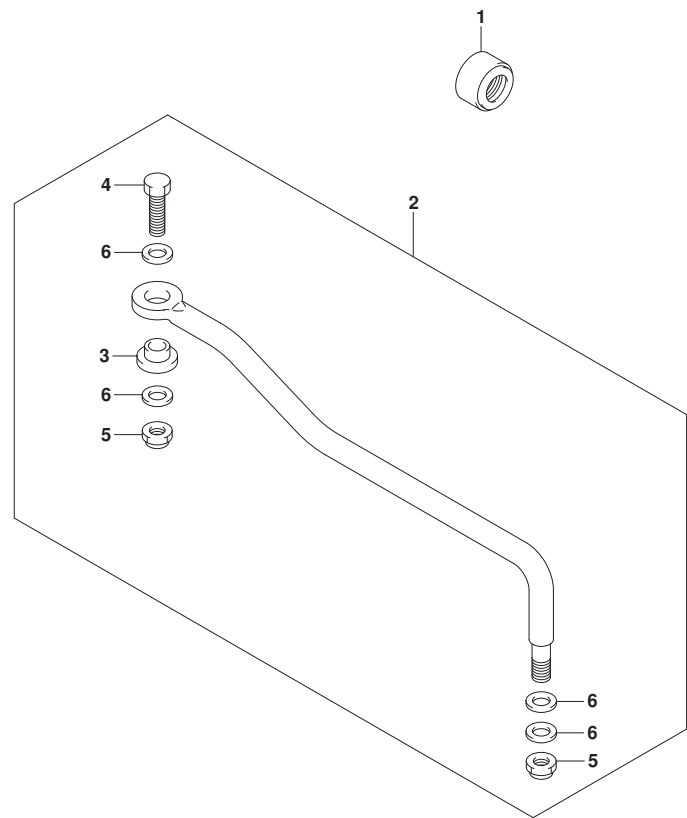


FIG.575A (2-C-7) OPT:DRAG LINK (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	41161-94400	SEAL, STEERING CABLE	1	
2	67701-94L00	LINK ASSY, DRAG	1	
3	67721-94L00	.SPACER	1	
4	67725-96J00	.BOLT, DRAG LINK	1	
5	67726-99E00	.NUT, LOCK	2	
6	67728-99E00	.WASHER	4	

NOTE : DF25A,DF25ATH,DF30A,DF30ATH,DF30AQ



FIG.600A


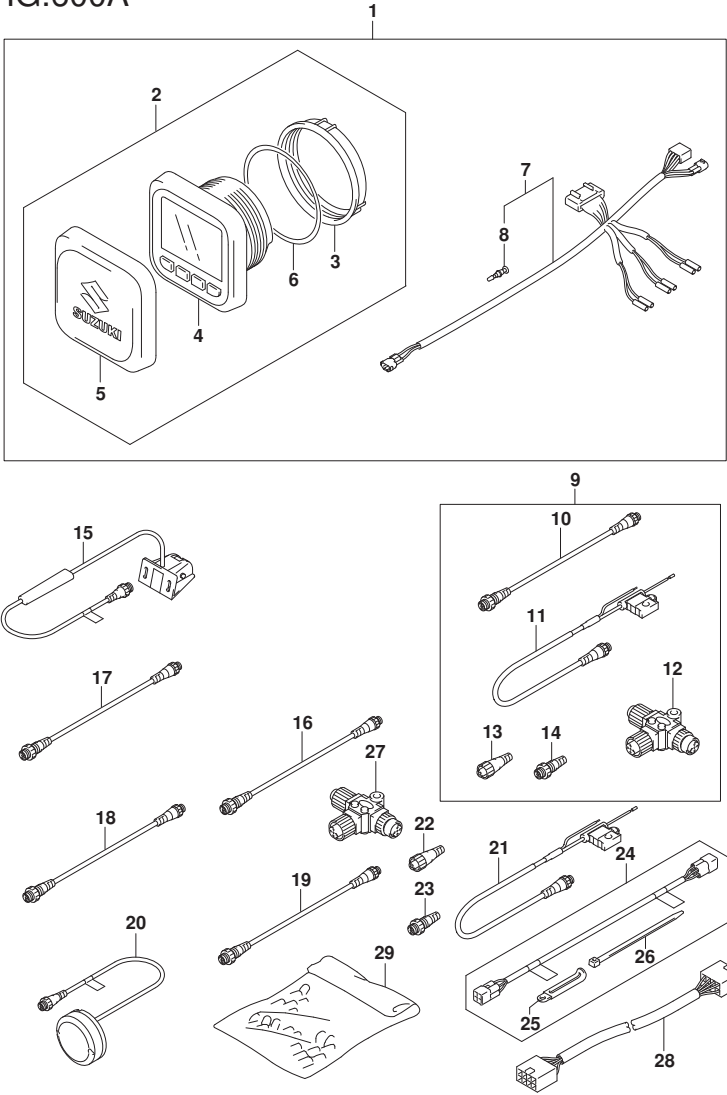


FIG.600A (2-C-8) OPT:MULTI FUNCTION GAUGE (SEE NOTE)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	34000-96L47	KIT, SINGLE GAUGE MECH	1	
2	34011-96L40	.GAUGE SET, MULTI	1	W/INSTRUCTION
3	34112-96L00	..NUT, GAUGE	1	
4	34193-96L00	..BEZEL, GAUGE	1	
5	34211-96L00	..COVER, GAUGE	1	
6	34825-96L00	..PACKING, GAUGE	1	
7	36661-96L30	ADAPTER, GAUGE	1	
8	36615-96300	..TERMINAL	5	
9	36001-88L00	SET, WIRE	1	
10	36662-88L10	.WIRE, 2 EXTENSION	1	
11	36663-88L00	.HARNESS ASSY, NETWORK POWER	1	
12	36664-88L00	.CONNECTOR, BRANCH	1	
13	36665-88L00	.UNIT, RESISTOR FEMALE	1	
14	36665-88L10	.UNIT, RESISTOR MALE	1	
15	34190-88L00	SENSOR ASSY, PAD WHEEL	1	
16	36662-88L10	WIRE, 2 EXTENSION	1	
17	36662-88L20	WIRE, 6 EXTENSION	1	
18	36662-88L30	WIRE, 15 EXTENSION	1	
19	36662-88L00	WIRE, 25 EXTENSION	1	
20	39950-88L02	MODULE ASSY, GPS RECEIVER	1	
21	36663-88L00	HARNESS ASSY, NETWORK POWER	1	
22	36665-88L00	UNIT, RESISTOR FEMALE	1	
23	36665-88L10	UNIT, RESISTOR MALE	1	
24	36660-89L03	SET, ENG TO INTERFACE WIRE	1	
25	29404-93J01	.CLAMP	1	
26	09407-14407	.CLAMP (L:145)	4	
27	36664-88L00	CONNECTOR, BRANCH	1	
28	36667-96L20	WIRE, GAUGE EXT	1	
29	36990-87D00	TERMINAL & SLEEVE SET	1	

NOTE : (020,021):(DF25AT,DF30AR,DF30AT),021:DF25AR

FIG.600B

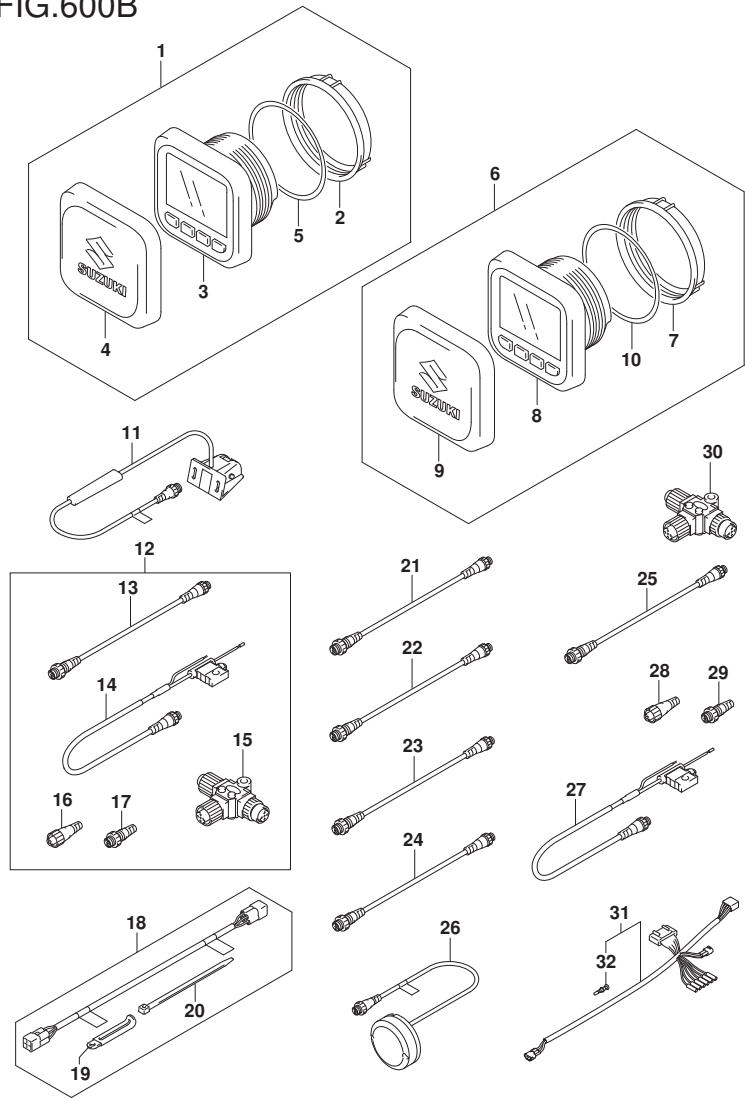

DF25A_30A_P01_022_600B
OPT:MULTI FUNCTION GAUGE

FIG.600B (2-C-9) OPT:MULTI FUNCTION GAUGE (022)

REF NO.	PART NO.	DESCRIPTION	Q'TY	REMARKS
1	34011-96L40	GAUGE SET, MULTI	1	W/INSTRUCTION
2	34112-96L00	.NUT, GAUGE	1	
3	34193-96L00	.BEZEL, GAUGE	1	
4	34211-96L00	.COVER, GAUGE	1	
5	34825-96L00	.PACKING, GAUGE	1	
6	34011-96L50	SET, MULTI GAUGE	1	
7	34112-96L00	.NUT, GAUGE	1	
8	34193-96L00	.BEZEL, GAUGE	1	
9	34211-96L00	.COVER, GAUGE	1	
10	34825-96L00	.PACKING, GAUGE	1	
11	34190-88L00	SENSOR ASSY, PAD WHEEL	1	
12	36001-88L00	SET, WIRE	1	
13	36662-88L10	.WIRE, 2 EXTENSION	1	
14	36663-88L00	.HARNESS ASSY, NETWORK POWER	1	
15	36664-88L00	.CONNECTOR, BRANCH	1	
16	36665-88L00	.UNIT, RESISTOR FEMALE	1	
17	36665-88L10	.UNIT, RESISTOR MALE	1	
18	36660-89L03	SET, ENG TO INTERFACE WIRE	1	
19	29404-93J01	.CLAMP	1	
20	09407-14407	.CLAMP (L:145)	4	
21	36662-88L00	WIRE, 25 EXTENSION	1	
22	36662-88L10	WIRE, 2 EXTENSION	1	
23	36662-88L20	WIRE, 6 EXTENSION	1	
24	36662-88L30	WIRE, 15 EXTENSION	1	
25	36662-88L00	WIRE, 25 EXTENSION	1	
26	39950-88L02	MODULE ASSY, GPS RECEIVER	1	
27	36663-88L00	HARNESS ASSY, NETWORK POWER	1	
28	36665-88L00	UNIT, RESISTOR FEMALE	1	
29	36665-88L10	UNIT, RESISTOR MALE	1	
30	36664-88L00	CONNECTOR, BRANCH	1	
31	36661-96L30	ADAPTER, GAUGE	1	
32	36615-96300	.TERMINAL	5	

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
10000		13110-94L00	122A-1 122B-1 122C-1 122D-1	13814-94L00	122B-18 122C-18 122D-18 122A-19
		13119-94L00	122A-2 122B-2		122B-19 122C-19
11110-94L00	111A-1	13125-94L00	122C-2	13815-94L00	122D-19
11112-96L00	113A-2		122D-2		122A-20
11115-94L00-001	111A-14	13300-94L00	122A-3	13816-94L00	122B-20
11119-94L00	111A-2		122B-3		122C-20
11141-94L00	111A-3	13453-36F00	122C-3	13817-94L00	122D-20
11162-94L00	111A-5		122D-3		122A-21
11170-94L00	111A-6	13510-94L00	163A-1	13818-94L00	122B-21
11174-94L00	111A-7		163A-3		122C-21
11261-93J00	139A-7	13640-32G20	166B-1	13819-94L00	122D-21
11291-94L00	113A-7		513A-2		122A-22
11301-94L20	113A-1-1	13650-52G00	513B-2	13820-94L00	122B-22
11301-94L30	113A-1-2		334A-1		122C-22
11382-93E00	111A-8	13655-87J01	334B-1	13820-94L10	122D-22
12100-89L20-050	116A-10-1		334C-1		122A-23
12100-89L30-050	116A-10-2	13711-94L00	334D-1	13832-94L00	122B-23
12111-89L10-0B0	116A-1		334E-1		122C-23
12140-89L00	116A-2-1	13711-94L10	334A-9	13832-94L10	122D-23
12140-89L00-050	116A-11-1		334B-8		122A-24
12140-89L10	116A-2-2	13711-94L00	334C-8	13841-94L00	122B-24
12140-89L10-050	116A-11-2		334D-8		122C-24
12151-89L00	116A-3	13711-94L00	334E-9	15100-94L01	122D-24
12160-89L11	116A-5		334A-10		122A-26
12163-89L02	116A-6	13711-94L00	334B-9	15100-94L10	122B-26-1
12220-94L00	116A-7		334C-9		122B-26-2
12341-89L10	116A-8	13711-94L00	334D-9	15100-94L01	122C-26
12631-94L00	120A-1		334E-10		122D-26-1
12635-89L00	120A-2	13711-94L00	163A-2	15100-94L01	122D-26-2
12637-89L00	120A-3		122A-16		122A-25
12638-89L00	120A-4	13711-94L00	122C-16	15100-94L01	122B-25
12700-94L01	121A-1		122B-16		122C-25
12741-94L00	120A-5	13800-94L01	122D-16	13851-94L00	122D-25
12744-94L00	120A-6		122A-14		122A-27
12761-94L10	120A-12	13800-94L10	122C-14	14110-94L00	122C-27
12764-94L00	120A-13		122B-14		139A-1
12840-94L00	121A-3	13810-94L01	122D-14	14151-94L00	139A-2
12842-09J00	121A-4		122A-15		146A-22
12843-27A00	121A-5	13810-94L01	122C-15	15100-94L10	146C-30
12861-94L00	121A-6		122B-15		146B-22
12862-94L00	121A-7	13810-94L10	122D-15	15131-94L00	146D-30
12911-94L10	121A-10		122A-17		146A-23
12915-94L60	121A-11	13812-94L01	122B-17	15191-94L00	146B-23
12921-94L00	121A-12		122C-17		146C-31
12931-78G00	121A-13	13813-94L00	122D-17	15191-94L00	146D-31
12932-50MA0	121A-14		122A-18		146A-24
12933-71C00	121A-15				

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
15192-94L00		146B-24	146D-41	16930-94L00	175A-11
		146C-32	146A-35	17400-94L21	160A-18
15193-94L00		146D-32	146B-35	17400-94L31	160C-18
		146A-25	146C-43	17411-94L00	160B-18
15194-94L00		146B-25	146D-43	17413-94L00	160A-1
		146C-33	146A-36	17413-94L10	160B-1
15194-94L30		146D-33	146B-36	17461-94L00	160C-1
		146A-26	146C-44	17462-94L10	160A-2
15194-94L40		146B-26	146D-44	17471-94L20	160C-2
		146C-34	146A-4	17471-94L30	160B-2
15194-94L60		146D-34	146B-4	17472-94L00	160A-3
		146A-30	146C-4	17561-94L00	160A-3
15194-94L70		146B-30	146D-4	17561-94L10	160B-3
		146C-38	146A-8	17561-94L20	160C-3
15194-94L80		146D-38	146B-8	17561-94L30	160A-4
		146A-31	146C-8	17561-94L00	160B-4
15200-94L11		146B-31	146D-8	17561-94L10	160C-4
		146C-39	146C-17	17561-94L20	160A-5
15217-94L01		146D-39	146D-17	17561-94L30	160C-5
		146A-27	146A-17	17561-94L00	160B-5
15217-94L01		146B-27	146B-17	17561-94L10	160A-6
		146C-35	146C-18	17561-94L20	160B-6
15217-94L01		146D-35	146D-18	17561-94L30	160C-6
		146A-28	146C-19	17561-94L00	160A-7-1
15217-94L01		146B-28	146D-19	17561-94L10	160B-7-1
		146C-36	146A-5	17561-94L20	160C-7-1
15217-94L01		146D-36	146B-5	17561-94L30	160A-7-2
		146A-29	146C-5	17561-94L00	160B-7-2
15217-94L01		146B-29	146D-5	17561-94L10	160C-7-2
		146C-37	144A-1	17561-94L20	160C-7-3
15217-94L01		146D-37	15710-82M00	17561-94L30	160A-8
		146A-1	144A-2	17561-94L00	160B-8
15217-94L01		146B-1	15715-82M00	17561-94L10	160C-8
		146C-1	144A-3	17561-94L20	160A-9
15217-94L01		146D-1	15717-82M00	17561-94L30	160A-9
		146A-2	144A-4	17561-94L00	160B-9
15217-94L01		146B-2	15750-94L00	17561-94L10	160C-9
		146C-2	146A-6	17561-94L20	160A-17
15217-94L01		146D-2	146B-6	17561-94L30	160B-17
		146A-32	146C-6	17561-94L00	160C-17
15217-94L01		146B-32	146D-6	17561-94L10	160A-10
		146C-40	146A-7	17561-94L20	160B-10
15217-94L01		146D-40	146C-7	17561-94L30	160C-10
		146A-3	146D-7	17561-94L00	160A-11
15217-94L01		146B-3	175A-1	17561-94L10	160A-11
		146C-3	16431-94L00	17561-94L20	160B-11
15217-94L01		146D-3	16440-11D00	17561-94L30	160C-11
		146B-33	113A-6	17561-94L00	162A-1
15217-94L01		146C-41	16510-87J01	17561-94L10	162A-2
			175A-5	17561-94L20	162A-7
15217-94L01			16519-94L00	17561-94L30	162A-4
			16520-94L00	17561-94L00	162A-5
15217-94L01			16910-94L01	17561-94L10	162A-5
				17561-94L20	405A-5

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
17914-93J01	405B-5	19137-94L00	166A-1	23115-94L10	206C-6
	405C-5	19140-94L01	166B-6		206B-6
	405A-6		166B-7		513A-10
	405B-6		513A-6		513B-10
17917-87L00	405C-6	19140-94L11	513B-6	23131-94L00	410A-20
	410A-30		166A-2		410B-20
	410B-30		166B-8		410C-20
	410C-30		513A-7		410D-20
18100-94L00	410D-30	19184-94L00	513B-7	23211-94L10	410E-20
	410E-30		166A-3		206A-7
	167A-1		166B-9		206B-7
	18117-78K00		513A-8		206C-7
	122A-7		513B-8	23213-94400	206A-24
	122B-7				206B-23
	122C-7				206C-24
	122D-7				206A-25
18119-94L00	122A-8	20000		23214-89J00	206B-24
	122B-8				206C-25
	122C-8				210A-1
	122D-8				210B-1
18121-94JL0	167A-2	21110-94L00	206B-1	25111-94L00	210C-1
18130-93E01	167A-3		513A-9		210A-2
18132-89L00	167A-4		513B-9		210B-2
18142-93E00	167A-5		206A-1		210C-2-1
18173-94L01	122A-10	21111-89L01	206C-1	25111-94L10	210C-2-2
	122B-10		206A-2		210A-5
	122C-10		206B-2		210B-5
	122D-10		206C-2		210C-5
18193-94L00	167A-11	21131-94J00-Y5S	444B-31-2	25215-94L00	210A-6
18194-94L00	167A-12		444A-31		210B-6
18210-95L00	167A-6		444B-31-1		210C-6
18280-93E00	167A-7		206A-3	25222-94L00	210A-9
18290-94L00	167A-10	21151-94L10	206B-3		210B-9
18295-94L00	167A-13		206C-3		210C-9
18590-58M00	334A-11		206A-4		210A-10
	334B-10	21210-94L00	206B-4	25231-96301	210B-10
	334C-10		206C-4		210C-10
	334D-10		336A-1		210A-11
19116-94L00	334E-11	22511-99011	336B-1	25232-96302	210B-11
	166B-2		336C-1		210C-11
	513A-3		336D-1		210A-3
	513B-3		336E-1		210B-3
19120-99J11	166B-3	23111-94L00	336F-1	29103-93J00	210C-3
	513A-4		206A-5-1		327B-6
	513B-4		206B-5-1		334C-13
	166B-4		206C-5-1		334D-13
19122-99J00	513A-5	23111-94L10	206A-5-2	29141-93J00	160A-13
	513B-5		206B-5-2		160B-13
	166B-5		206C-5-2		160C-13
	513A-16		206A-6		210A-8
19131-95502	513B-16	23115-94L00			

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
	210B-8	31320-94400	301B-8	33220-64L00	310B-4
	210C-8		301C-8		310C-4
	335A-12		301A-9		310D-4
	335C-12		301B-9		310E-4
	336C-14	31360-96300	301C-9	33410-94L00	303A-4
	336D-21		301A-10		303B-4
	336F-21		301B-10		310A-10
	600A-25		301C-10		310B-10
29404-93J01	600B-19	31800-94L01	310A-19	33446-94L00	310C-10
29404-93J11	338A-12		310B-19		310D-10
	501B-22		310C-19		310E-10
			310D-19		310A-11
		31912-94L00	310E-19	33510-16H10	310B-11
			561A-4		310C-11
			301A-11		310D-11
			301B-11		310E-11
30000		31918-94402	301C-11	33541-16H00	310A-15
			561A-5		310B-15
			301A-12		310C-15
			301B-12		310D-15
31000-94L09	561A-1	32000-94L03	301C-12	33542-16H00	310E-15
31100-94402	301A-1		561A-6		310A-16
	301B-1		553A-1		310B-16
	301C-1		303A-1		310C-16
	561A-3	32102-94L00	303B-1	33634-94L00	310D-16
	561A-2		561A-13		310E-16
	340A-2		303A-2		310A-12
	340A-4		303B-2		310B-12
31101-94L04	338A-13	32120-94L00	303A-3	33810-94L01	310C-12
31111-89J00	301A-3		303B-3		310D-12
31123-89J00	301B-3		310A-2		310E-12
31123-89J10	301C-3		310B-2	32800-88L01	322A-3
31131-96300	301A-4	32160-94L01	310C-2		322B-2
	301B-4		310D-2		322C-2
	301C-4		310E-2		322D-3
	301A-5		553A-2		322A-1
31135-89J00	301B-5	32800-94L01	561A-14	33820-89E01	322B-1
	301C-5		310A-1		322C-1
	301A-2		310B-1		322D-1
	301B-2		310C-1		561A-16
	301C-2	32815-94L01	310D-1	33833-91J00	301A-13
	340A-5		310E-1		301B-13
	301A-6		310A-3		301C-13
	301B-6		310B-3		561A-7
	301C-6	31310-96300	310C-3	33920-94L60	444A-21
	301A-7		310D-3		444B-21
	301B-7		310E-3		310A-17
	301C-7		553A-3		310B-17
31311-89J00	340A-3	32890-94L00	561A-15	33920-94L70	310D-17
31312-96300	301A-8		310A-4		310E-17

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
33920-94L80	310C-17		501B-19	36617-93J10	322A-11
33925-94L00	310A-18	34500-93J02	501A-1-1		322B-8
	310B-18		501B-1-1		322C-8
	310C-18	34500-93J13	501A-1-2		322D-9
	310D-18		501B-1-2	36617-94L00	301B-18
	310E-18	34600-93J02	501A-3-1		513B-39
34000-96L47	600A-1		501B-3-1	36618-43410	322A-5
34011-96L40	600A-2	34600-93J13	501A-3-2		322A-7
	600B-1		501B-3-2		322B-4
34011-96L50	600B-6	34800-93J02	501B-23-1		322C-4
34100-93J22	501A-5-1	34800-93J13	501B-23-2		322D-5
	501B-5-1	34801-99E05	501B-25		513A-12
34100-93J33	501A-5-2	34825-96L00	600A-6		513B-12
	501B-5-2		600B-5		561A-18
34100-93J42	501A-5-3		600B-10	36620-93J12	521A-1-1
	501B-5-3	36001-88L00	600A-9		521B-1-1
34100-93J53	501A-5-4		600B-12	36620-93J42	521A-1-2
	501B-5-4	36360-94L00	334A-3		521B-1-2
34112-96L00	600A-3		334B-3	36620-94L01	450A-52
	600B-2		334C-3		508A-52
	600B-7		334D-3		508C-53
34190-87D00	501A-12		334E-3	36620-94L11	450C-53
	501B-12	36367-89L00-Y5S	334C-4-2	36620-94L20	450B-49
34190-88L00	600A-15		334D-4-2		450D-51
	600B-11		334E-4-2	36621-93J00	521B-2
34190-95500	501A-10	36367-89L00-YAY	334A-4	36628-91J00	450A-2
	501B-10		334B-4		450B-2
34191-92E00	501A-7		334C-4-1		508A-2
	501B-7		334D-4-1		508B-2
34193-96L00	600A-4		334E-4-1	36628-92E01	450C-2
	600B-3	36610-94L01	322A-4		450D-2
	600B-8	36610-94L11	322A-6		508C-2
34200-93J02	501A-15-1		561A-17		508D-2
	501B-15-1	36610-94L21	322B-3	36656-94L00	410A-31
34200-93J14	501A-15-2		513A-11		410B-33
	501B-15-2	36610-94L32	322D-4		410C-33
34200-93J22	501A-13-1	36610-94L42	322C-3		410D-31
	501B-13-1		513B-11		410E-31
34200-93J34	501A-13-2	36615-96300	322A-9	36660-89L03	600A-24
	501B-13-2		322D-7		600B-18
34211-96L00	600A-5		450B-51	36661-96L30	600A-7
	600B-4		450D-53		600B-31
	600B-9		501A-9	36662-88L00	600A-19
34300-93J03	501A-17-1		501B-9		600B-21
	501B-17-1		600A-8		600B-25
34300-93J14	501A-17-2		600B-32	36662-88L10	600A-10
	501B-17-2	36616-94L00	322A-10		600A-16
34310-92E01	501A-18		322B-7		600B-13
	501B-18		322C-7		600B-22
34360-92E00	501A-19		322D-8	36662-88L20	600A-17

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
	600B-23		508D-3		450B-4-1
36662-88L30	600A-18	37110-94J03	450A-3		450C-4-1
	600B-24		508A-3		450D-4-1
36663-88L00	600A-11	37110-94J10	450B-3		508A-4-1
	600A-21		508B-3		508B-4-1
	600B-14	37110-98L00	530B-2		508C-4-1
	600B-27		530B-9		508D-4-1
36664-88L00	600A-12		530B-18		530A-3-1
	600A-27	37138-98L00	530B-5		530A-19-1
	600B-15	37138-98L10	530B-12		530B-4-3
	600B-30	37138-98L20	530B-21		530B-11-3
36665-88L00	600A-13	37139-99E00	530A-6		530B-20-3
	600A-22	37139-99E40	530A-22	37141-99E10	450A-4-2
	600B-16	37141-98L00	530B-3-3		450B-4-2
	600B-28		530B-10-3		450C-4-2
36665-88L10	600A-14		530B-19-3		450D-4-2
	600A-23	37141-98L10	530B-3-4		508A-4-2
	600B-17		530B-10-4		508B-4-2
	600B-29		530B-19-4		508C-4-2
36667-96L20	521B-3	37141-98L20	530B-3-5		508D-4-2
	600A-28		530B-10-5		530A-3-2
36690-94L00	303A-5		530B-19-5		530A-19-2
36690-94L10	303A-6	37141-98L30	530B-3-6		530B-4-4
36740-94L00	553A-5		530B-10-6		530B-11-4
36890-93J01	517A-23		530B-19-6		530B-20-4
36894-87D00	336A-2	37141-98L40	530B-3-7	37141-99E20	450A-4-3
	336B-2		530B-10-7		450B-4-3
	336E-2		530B-19-7		450C-4-3
36990-87D00	450B-52	37141-98L50	530B-3-8		450D-4-3
	508A-54		530B-10-8		508A-4-3
	508B-49		530B-19-8		508B-4-3
	508C-55	37141-98L60	530B-3-9		508C-4-3
	508D-51		530B-10-9		508D-4-3
	553A-11		530B-19-9		530A-3-3
	600A-29	37141-98L70	530B-3-10		530A-19-3
36991-94L00	322A-18		530B-10-10		530B-4-5
	322B-15		530B-19-10		530B-11-5
	322C-15	37141-98L80	530B-3-11		530B-20-5
	322D-16		530B-10-11	37141-99E30	450A-4-4
	513B-38		530B-19-11		450B-4-4
37100-96J01	530A-1	37141-98L90	530B-3-12		450C-4-4
37100-96J27	530A-17		530B-10-12		450D-4-4
37100-98L00	530B-1		530B-19-12		508A-4-4
37100-98L10	530B-8	37141-98LA0	530B-3-1		508B-4-4
37100-98L20	530B-17		530B-10-1		508C-4-4
37110-93J02	530A-2		530B-19-1		508D-4-4
	530A-18	37141-98LB0	530B-3-2		530A-3-4
37110-93J12	450C-3		530B-10-2		530A-19-4
	508C-3		530B-19-2		530B-4-6
37110-93J20	450D-3	37141-99E00	450A-4-1		530B-11-6

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
37141-99E40	530B-20-6	37141-99E80	530B-4-10	37143-99E01	530A-3-12
	450A-4-5		530B-11-10		530A-19-12
	450B-4-5		530B-20-10		530B-4-2
	450C-4-5		450A-4-9		530B-11-2
	450D-4-5		450B-4-9		530B-20-2
37141-99E50	508A-4-5	37141-99E90	450C-4-9	37149-93J00	450A-5
	508B-4-5		450D-4-9		450C-5
	508C-4-5		508A-4-9		508A-5
	508D-4-5		508B-4-9		508C-5
	530A-3-5		508C-4-9		530A-4
37141-99E60	530A-19-5	37141-99EA0	508D-4-9	37161-89L02	530A-20
	530B-4-7		530A-3-9		450A-6
	530B-11-7		530A-19-9		450C-6
	530B-20-7		530B-4-11		508A-6
	450A-4-6		530B-11-11		508C-6
37141-99E70	450B-4-6	37141-99EB0	530B-20-11	37163-89L00	530A-5
	450C-4-6		450A-4-10		530A-21
	450D-4-6		450B-4-10		334A-5
	508A-4-6		450C-4-10		334D-5
	508B-4-6		450D-4-10		334E-5
37141-99E80	508C-4-6	37141-99E90	508A-4-10	37163-89L00	561A-20
	508D-4-6		508B-4-10		334A-6
	530A-3-6		508C-4-10		334B-5
	530A-19-6		508D-4-10		334C-5
	530B-4-8		530A-3-10		334E-6
37141-99E90	530B-11-8	37141-99EA0	530A-19-10	37210-93J00	513A-15
	530B-20-8		530B-4-12		513B-15
	450A-4-7		530B-11-12		530A-15
	450B-4-7		530B-20-12		530B-26
	450C-4-7		450A-4-11		530A-16
37141-99E00	450D-4-7	37141-99EB0	450B-4-11	37212-93J00	530B-27
	508A-4-7		450C-4-11		545A-11
	508B-4-7		450D-4-11		450C-7
	508C-4-7		508A-4-11		450D-5
	508D-4-7		508B-4-11		508C-7
37141-99E10	530A-3-7	37141-99EB0	508C-4-11	37221-94L00	508D-5
	530A-19-7		508D-4-11		334A-7
	530B-4-9		530A-3-11		334B-6
	530B-11-9		530A-19-11		334C-6
	530B-20-9		530B-4-1		334D-6
37141-99E20	450A-4-8	37141-99EB0	530B-11-1	37221-94L00	334E-7
	450B-4-8		530B-20-1		518A-12
	450C-4-8		450A-4-12		206A-23
	450D-4-8		450B-4-12		206B-22
	508A-4-8		450C-4-12		206C-23
37141-99E30	508B-4-8	37141-99EB0	450D-4-12	37221-94L00	530A-9
	508C-4-8		508A-4-12		530B-28
	508D-4-8		508B-4-12		334A-2
	530A-3-8		508C-4-12		334B-2
	530A-19-8		508D-4-12		334C-2

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
37820-93J11	334D-2	37850-92E27	517A-5	41111-94L00-Y5S	335C-1-2
	334E-2		327A-3		335A-1
	450A-7		513B-41		335C-1-1
	450B-5		327B-3		335B-1-2
	450C-8		450C-11		335B-1-1
37820-98L00	450D-6	37850-96L00	450D-9	41121-94L00-Y5S	335D-1
	508A-7		508C-11		335C-2-2
	508B-5		508D-9		335A-2
	508C-8		327B-8		335C-2-1
	508D-6		327B-4		335B-2-2
37823-92E02	530A-11	37851-89L00	410A-32	41121-94LA1-YAY	335B-2-1
	530A-23		410B-34		335D-2
	530B-13		410D-32		335A-7
	530B-22		410E-32		335C-7
	530B-29		327A-4		335B-7
37823-92E02	450A-8	37852-94JB0	513B-42	41130-91L01	335D-7
	450B-6		327A-5		335A-13
	450C-9		513B-43		335B-9
	450D-7		338A-14		335C-13
	508A-8		340A-1		335D-9
37823-97J00	508B-6	38410-93J21	327A-1	41161-94400	442A-1
	508C-9		327B-1		575A-1
	508D-7		327A-2		335A-3
	530A-12		327B-2		335C-3
	530A-24		508A-11		335B-3
37823-98L00	444A-34	38500-93J00	450A-11	41211-94LA0	335D-3
	444B-34		450B-9		335A-4
	530B-14		450C-12		335B-4
	530B-23		450D-10		335C-4
	530B-30		508B-9		335D-4
37825-99E10	530A-10	38500-93J90	508C-12	41213-94J01	335A-5
	450A-9		508D-10		335B-5
	450B-7		530A-7		335C-5
	450C-10		530A-27		335D-5
	450D-8		530B-6		336C-15
37826-92J10	508A-9	39600-94L01	530B-15	41221-94LA0	336D-22
	508B-7		530B-24		336F-22
	508C-10		553A-4		336C-16
	508D-8		501A-21		336D-23
	530A-13		501B-21		336F-23
37826-97J01	530A-25	39669-94L00	600A-20	41230-94LA0	336C-17
	444A-35		600B-26		336D-24
	444B-35				336F-24
	444A-33				336C-18
	444B-33				336D-25
37830-94J11	530B-31	39950-88L02		41233-94LA0	336F-25
	444B-36-2				336C-19
	444A-36				336D-26
	444B-36-1				336F-26
	544A-4				336E-3-2

40000

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
43111-94L00-YAY	336A-3-1 336B-3-1 336E-3-1	43516-89J00	336F-15 336A-33 336D-16	45253-94L00	336B-20 336E-16 336A-17
43111-94L10-Y5S	336E-3-4		336E-33		336B-21
43111-94L10-YAY	336A-3-2 336B-3-2 336E-3-3	43517-89L00	336F-16 336A-34 336D-17	45255-94L00	336E-17 336A-18 336B-22
43111-94LA0-Y5S	336C-2-2 336D-2-2		336E-34 336F-17	45257-94L00	336E-18 336A-19
43111-94LA0-YAY	336C-2-1 336D-2-1 336F-2-1	43711-94L00	336A-5 336B-5 336C-4		336B-23 336E-19 336A-20
43111-94LB0-Y5S	336C-2-4 336D-2-4		336D-4 336E-5	45260-94L00	336B-24 336E-20
43111-94LB0-YAY	336C-2-3 336D-2-3 336F-2-2	43750-94L00-Y5S	336F-4 336C-5-2 336D-5-2	45260-94LA0	339A-1
43112-94L01	405A-2 405B-2 405C-2	43750-94L00-YAY	336E-6-2 336A-6-1 336B-6-1	45269-89L00	335A-19 335C-19 335A-16
43211-87JL0	336A-4 336B-4 336C-3 336D-3		45421-94LA0		335C-16 335B-17 335D-18
	336E-4 336F-3	43750-94L10-Y5S	336C-5-1 336D-5-1 336E-6-1	45425-94J01	335A-17 335C-17
43241-87J00	335D-12		336F-5-1	45710-94L00	336A-38 336B-31
43411-89L00	336A-27 336E-27	43750-94L10-YAY	336C-5-4 336D-5-4 336E-6-4	45722-94L00	336E-38 336A-39 336B-32
43411-89LA0	336D-10 336F-10		336A-6-2 336B-6-2	45741-94L00	336E-39 336A-40 336B-33
43415-94L01	336A-28 336D-11 336E-28 336F-11	43755-94L00	336C-5-3 336D-5-3 336E-6-3		336E-40 336A-41 336B-34
43420-89L00	336A-29 336D-12 336E-29 336F-12		336B-7 336C-6	45751-94L00	336E-41 336A-42 336B-35
43425-89L00	336A-30 336D-13 336E-30 336F-13	45211-94L00	513A-17 513B-17 336A-12	45761-94L00	336E-42 339A-2 338A-20
43512-89L00	336A-31 336D-14	45221-94L01	336B-16 336E-12 336A-13	47225-94L00	339A-3 339A-4 338A-1
	336E-31 336F-14		336B-17 336E-13 336A-14	47226-94L00	338A-21 339A-5
43515-88L00	336A-32 336D-15 336E-32	45241-94L01	336B-18 336E-14 336A-15	48321-94L00	338A-22 339A-6 338A-23
			336B-19 336E-15	48325-94L00	339A-7 338A-26
		45252-94L00	336A-16	48326-94L00	

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
48510-89J00	339A-8	54144-94L00	401A-13		336F-8-2
48518-87D00	338A-11	54145-94L00	401A-14	55332-94L00	407A-9
48551-89J00	338A-15	54151-94L00	405A-11		407B-9
48553-97E00	338A-16		405B-11		407C-9
48571-89J01	338A-17		405C-11	55333-94L10	407A-10
48572-89J01	338A-18	54167-94L00	405A-12		407B-10
48583-95E00	338A-3		405B-12		407C-10
48585-89J00	338A-4	54211-94L00-Y5S	405C-12	56120-91L11-Y5S	407B-15-2
48681-87J11	338A-18	54211-94L00-YAY	405B-13-2	56120-91L11-YAY	407A-15
48818-97E00	338A-19		405A-13		407B-15-1
48823-89J00	338A-5		405B-13-1		407C-15
48832-89J00	338A-6	54213-93901	405C-13	56130-94L00	220A-21
48834-89J00	338A-7		405A-14		220B-21
48842-89J00	338A-8		405B-14		220C-21
48861-89J01	338A-9		405C-14	57110-94L01	220A-1-1
	338A-10	55100-94L00-Y5S	407B-1-2		220B-1-1
		55100-94L00-YAY	407A-1	57110-94L11	220C-1-1
			407B-1-1		220A-1-2
			407C-1		220B-1-2
		55114-963L0	407A-2		220C-1-2
			407B-2	57110-94L21	220C-1-3
			407C-2	57130-96300	405C-18
		55125-96310	407A-7	57133-94L00	220A-2
			407B-7		220B-2
			407C-7		220C-2
51110-94L00	401A-1-1	55321-87J01	139A-6	57311-91L00	220A-5
51110-94L10	401A-1-2		335A-14-1		220B-5
51211-94L00	401A-2		335B-10-1		220C-5
52110-94L01-Y5S	405B-1-3		335C-14-1	57510-94L00	220A-8
52110-94L01-YAY	405A-1-1		335D-10-1		220B-8
	405B-1-1		336A-10-1		220C-8
52110-94L11-Y5S	405C-1-1		336B-14-1	57521-94L00	220A-9
52110-94L11-YAY	405B-1-6		336C-12-1		220B-9
	405A-1-3		336D-8-1		220C-9
	405B-1-4		336E-10-1	57610-96311	220A-14
	405C-1-3		336F-8-1		220B-14
52110-94L20-YAY	405A-1-2		338A-28		220C-14
	405B-1-2		339A-9	57621-91L21	220A-15
	405C-1-2		407A-8		220B-15
52110-94L30-YAY	405A-1-4		407B-8		220C-15
	405B-1-5		407C-8	57631-95JL0	220A-20
	405C-1-4	55321-87J11	335A-14-2		220B-20
52113-94L00	405A-4		335B-10-2		220C-20
	405B-4		335C-14-2	57632-91L00	407A-23
	405C-4		335D-10-2		407B-23
52131-94L00-YAY	405C-17		336A-10-2		407C-23
54112-94L00	401A-6		336B-14-2	57633-96300	407A-24
54125-94L00	401A-7		336C-12-2		407B-24
54130-94L00	401A-8		336D-8-2		407C-24
54137-94L00	401A-9		336E-10-2	58100-91L20-019	407A-21-3

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
58100-91L30-019	407B-21-3	60000	420F-14	61400-94L10-YAY	420C-1
	407C-21-3		420G-14		420D-1
	407A-21-4		420H-14		420H-1
	407B-21-4		420J-12		420J-1
58100-91L40-019	407C-21-4	60000		61412-89L00	410A-9
58100-91L50-019	407A-21-1				410B-9
	407B-21-1				410C-9
	407C-21-1				410D-9
58100-95D01-019	407A-21-2				410E-9
	407A-21-2			61433-94L00	420A-2
	407B-21-2				420B-2
	407C-21-2				420E-2
58100-96372-019	407A-21-5	60000	410A-4		420F-2
	407A-21-5		410B-4		420G-2
	407B-21-5		410C-4		420H-2
	407C-21-5		410D-4		420J-2
58100-96462-019	407A-21-6	60000	410E-4	61433-94L10	420C-2
	407B-21-6		410A-13-1		420D-2
	407C-21-6		410E-13-1		420H-2
	407A-21-10		410B-13		420J-2
58100-96472-019	407B-21-10	60000	410C-13	61435-94L20-Y5S	420B-7-2
	407C-21-10		513A-20	61435-94L20-YAY	420A-7
	407A-21-7		513B-20		420B-7-1
	407B-21-7		410A-13-2	61435-94L30-Y5S	420E-7-2
58100-96482-019	407C-21-7	60000	410D-13		420G-7-2
	407A-21-8		410E-13-2	61435-94L30-YAY	420E-7-1
	407B-21-8		410A-5		420F-7
	407C-21-8		410B-5		420G-7-1
58100-96492-019	407A-21-9	60000	410C-5	61435-94L40-YAY	420C-7
	407B-21-9		410D-5		420D-7
	407C-21-9		410E-5	61435-94L50-YAY	420H-7
	407A-22		410A-14		420J-7
59178-97J00	407B-22	60000	410B-14	61443-89L00-YAY	420C-8
	407C-22		410C-14		420D-8
	407A-11		410D-14		420H-8
	407B-11		410E-14		420J-8
59211-94L00	407C-11	60000	410A-33	61443-94L10-Y5S	420B-8-2
	336A-21		410B-38		420E-8-2
	336B-25		410C-37		420G-8-2
	336E-21		410D-33	61443-94L10-YAY	420A-8
59262-94J00	175A-3	60000	410E-33		420B-8-1
	146A-9		405A-3		420E-8-1
	146B-9		405B-3		420F-8
	146C-9		405C-3		420G-8-1
59442-94L00	146D-9	60000	420B-1-2	61446-89L10-Y5S	420B-9-2
	335A-18		420E-1-2		420E-9-2
	335C-18		420G-1-2		420G-9-2
	420A-14		420A-1	61446-89L10-YAY	420A-9
59800-94L10	420B-14	60000	420B-1-1		420B-9-1
	420C-14		420E-1-1		420C-9
	420D-12		420F-1		420E-9-1
	420E-14		420G-1-1		420F-9

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
61453-89L00-YAY	420G-9-1	61841-94L00	420D-3		410B-6
	420H-9		420E-3		410C-6-1
	420C-10		420F-3		410D-6-1
	420D-9		420G-3		410E-6-1
61453-94L10-Y5S	420H-10	61631-99J00	420H-3		410A-21
	420J-9		420J-3		410B-21
	420B-10-2		420A-5		410C-21
	420E-10-2		420B-5		410D-21
61453-94L10-YAY	420G-10-2	61642-90L00	420C-5		410E-21
	420A-10		420D-5		444B-1-2
	420B-10-1		420E-5		444A-1
	420E-10-1		420F-5		444B-1-1
61458-89L30	420F-10	61810-94L10-Y5S	420G-5		444A-22
	420G-10-1		420H-5		444B-22
	420A-11		420J-5		444A-3
	420B-11		410A-28		444B-3
61471-89L00	420C-11	61810-94L10-YAY	410B-28		444A-2
	420D-10		410C-28		444B-2
	420E-11		410D-28		444A-4
	420F-11		410E-28		444B-4
61810-94L10-Y5S	420G-11	61810-94L10-YAY	410C-1-2		444B-5-2
	420H-11		410D-1-2		444A-5
	420J-10		410E-1-2		444B-5-1
	420A-12		410A-1		444A-23
61820-94L00-Y5S	420B-12	61820-94L00-YAY	410B-1		444B-23
	420C-12		410C-1-1		444B-24-2
	420E-12		410D-1-1		444A-24
	420F-12		410E-1-1		444B-24-1
61472-97J00	420G-12	61820-94L20-Y5S	410E-2-2		444A-25
	420H-12		410A-2		444B-25
	167A-16		410B-2		444A-26
	167A-17		410E-2-1		444B-26
61494-94L01	410A-10	61820-94L20-YAY	410C-2-2		444A-6
	410B-10		410D-2-2		444B-6
	410C-10		410C-2-1		444A-32
	410D-10		410D-2-1		444B-32
61616-93EL0	410E-10	61827-94L00	410A-15		444A-7
	410A-11		410B-15		444B-7
	410B-11		410C-15		444A-9
	410C-11		410D-15		444B-9
61620-94L00	410D-11	61829-94L00	410E-15		444A-8
	410E-11		410A-16		444B-8
	410A-27		410B-16		444A-10
	410B-27		410C-16		444B-10
61622-90L00	410C-27	61830-94L00-YAY	410D-16		444A-11
	410D-27		410E-16		444B-11
	410E-27		410C-6-2		444A-12
	420A-3		410D-6-2		444B-12
61830-94L00-YAY	420B-3		410E-6-2		444A-14
	420C-3		410A-6		444B-14

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
63650-94L00	444A-15	67222-92E00	545A-2		508B-14
	444B-15	67222-92E50	518A-2		508C-18
65000-94L10	432A-1	67223-92E00	545A-3		508D-16
65520-99100	432A-2	67223-92E50	518A-6		518A-41
65561-95D00	432A-3	67223-99E10	450A-15	67233-92E00	518A-27
65700-89L32	432A-5		450B-12		545A-26
65720-986L0	432A-10		450C-16	67234-88L00	545A-22
65740-95D01	432A-4		450D-14	67234-92E00	518A-21
65750-87J11	432A-6		508A-15	67235-92E00	518A-28
65750-955L1	432A-7		508B-12		545A-27
65770-89L00	432A-8		508C-16	67236-92E00	518A-30
65781-98500	432A-9		508D-14		545A-12
67130-94L03	513A-1	67224-92E00	545A-9	67237-92E01	518A-31
67130-94L13	513B-1	67224-92E50	518A-8		545A-28
67140-95601	515A-1	67224-96L00	450A-49	67238-87D00	450A-18
67200-88L01	544A-1		450B-46		450B-15
	545A-1		450C-50		450C-19
67200-93J34	517A-1		450D-48		450D-17
	518A-1		508A-49		508A-18
67200-93J62	450C-1		508B-46		508B-15
	508C-1		508C-50		508C-19
67200-93J70	450D-1		508D-48		508D-17
	508D-1	67225-92E00	518A-25	67238-88L00	545A-31
67200-94J33	450A-1	67225-92E50	518A-9	67238-92E50	518A-32
	508A-1	67226-92E00	545A-15	67238-96L00	450A-50
67200-94J40	450B-1	67226-92E10	518A-14		450B-47
	508B-1		545A-16		450C-51
67211-88L00	544A-17	67227-92E00	518A-23		450D-49
67211-92E50	517A-29		545A-24		508A-50
67212-88L00	544A-7	67228-92E00	518A-17		508B-47
67212-95600	450A-13		545A-18		508C-51
	450B-10	67229-95600	450A-16		508D-49
	450C-13		450B-13	67239-92E00	518A-33
	450D-11		450C-17		545A-35
	508A-13		450D-15	67239-92E10	518A-29
	508B-10		508A-16		545A-41
	508C-13		508B-13	67240-92E00	545A-17
	508D-11		508C-17	67240-92E50	518A-16
67214-92E00	450A-12		508D-15	67241-88L00	545A-34
	508A-12	67230-88L00	545A-20	67241-92E50	518A-42
67220-95630	450A-14	67230-92E00	518A-19	67241-99E11	450A-19
	450B-11	67231-88L00	545A-32		450B-16
	450C-15	67231-92E00	518A-40		450C-20
	450D-13	67232-88L00	545A-33		450D-18
	508A-14	67232-92E50	518A-43		508A-19
	508B-11	67232-95600	450A-17		508B-16
	508C-15		450B-14		508C-20
	508D-13		450C-18		508D-18
67221-92E00	545A-8		450D-16	67242-92E50	517A-13
67221-92E50	518A-7		508A-17	67243-92E00	545A-38

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
67243-95600	450A-20	67253-92E00	544A-13		450C-32
	450B-17	67253-92E10	518A-37		450D-30
	450C-21	67253-95600	450A-25		508A-31
	450D-19		450B-22		508B-28
	508A-20		450C-26		508C-32
	508B-17		450D-24		508D-30
	508C-21		508A-25	67261-88L00	544A-3
	508D-19		508B-22	67261-88L10	544A-2
67244-95600	450A-21		508C-26	67261-92E50	517A-10
	450B-18		508D-24	67261-96L00	450A-32
	450C-22		518A-39		450B-29
	450D-20	67254-92E50	517A-22		450C-33
	508A-21	67255-92E50	517A-8		450D-31
	508B-18	67255-96L00	450A-26		508A-32
			450B-23		508B-29
	508C-22		450C-27		508C-33
67245-92E00	508D-20		450D-25		508D-31
	518A-22		450A-26	67263-88L30	450A-10
	545A-23		508B-23		450B-8
67245-95600	450A-22		508B-27		508A-10
	450B-19		508D-25		508B-8
	450C-23		517A-11	67264-88L00	544A-18
	450D-21	67256-92E50	450A-27	67264-88L10	544A-19
	508A-22	67256-95600	450B-24	67264-95600	450A-34
	508B-19		450C-28		450B-31
	508C-23		508D-26		508C-35
	508D-21		450D-26		508D-33
67246-88L00	545A-36		508A-27		508A-34
67246-92E50	518A-34		508B-24		508B-31
67251-88L00	544A-20		508C-28		508C-35
67251-92E50	517A-9		508D-26		508D-33
67251-96L00	450A-23	67257-88L00	544A-9		450A-35
	450B-20	67257-92E00	517A-12	67267-96L00	450B-32
	450C-24	67257-96L00	450A-28		450C-36
	450D-22		450B-25		450D-34
	508A-23		450C-29		508A-35
	508B-20		450D-27		508B-32
	508C-24		508A-28		508C-36
	508D-22		508B-25		508D-34
67252-88L00	545A-39		508C-29		545A-29
67252-92E00	518A-35		508D-27	67269-92E01	450A-46
67252-92E10	518A-38	67258-99E00	450A-30	67269-96L10	450B-43
67252-95600	450A-24		450B-27		450C-47
	450B-21		450C-31		450D-45
	450C-25		450D-29		508A-46
	450D-23		508A-30		508B-43
	508A-24		508B-27		508C-47
	508B-21		508C-31		508D-45
	508C-25		508D-29		544A-16
	508D-23	67259-87D00	450A-31	67271-88L10	545A-6
67253-88L00	545A-40		450B-28	67272-88L00	

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
67273-88L00	519A-5		450D-47		518A-13
	544A-25		508A-48	67296-92E20	518A-15
	545A-47		508B-45		545A-14
67273-95601	450A-36		508C-49	67296-92E30	545A-44
	450B-33		508D-47	67296-92E60	544A-11
	450C-37		515A-4	67296-94310	517A-3
	450D-35	67291-92E00	518A-5	67296-95610	450A-43
	508A-36		545A-7		450B-40
	508B-33	67291-92E10	518A-36		450C-44
	508C-37		545A-37		450D-42
	508D-35	67292-94300	450A-38		508A-43
	517A-25		450B-35		508B-40
	544A-15		450C-39		508C-44
67274-88L00	545A-42		450D-37		508D-42
67274-92E50	517A-28		508A-38		545A-43
67275-95600	450A-37		508B-35	67296-95630	450A-42
	450B-34		508C-39		450B-39
	450C-38		508D-37		450C-43
	450D-36		518A-3		450D-41
	508A-37		545A-5		508A-42
	508B-34	67294-92E00	518A-11		508B-39
	508C-38	67294-95600	450A-39		508C-43
	508D-36		450B-36		508D-41
	517A-24		450C-40	67296-95640	515A-3
	544A-14		450D-38	67296-96L00	450A-41
67281-88L00	544A-10		508A-39		450B-38
67283-92E50	517A-26		508B-36		450C-42
67284-92E50	517A-27		508C-40		450D-40
67284-94L10	450A-51		508D-38		508A-41
	450B-48	67295-92E10	517A-4		508B-38
	450C-52	67295-92E50	517A-18		508C-42
	450D-50	67296-88D10	517A-15		508D-40
	508A-51		545A-13	67296-96L10	450A-33
	508B-48		545A-30		450B-30
	508C-52	67296-88D20	517A-17		450C-34
	508D-50	67296-88D30	517A-21		450D-32
67286-92E00	518A-18	67296-88L00	544A-5		508A-33
	545A-19	67296-90J20	450A-40		508B-30
67287-92E00	545A-46		450B-37		508C-34
67287-92E50	517A-19		450C-41		508D-32
67288-92E00	545A-4		450D-39	67297-95600	450A-44
67288-92E10	518A-4		508A-40		450B-41
67288-92E20	517A-14		508B-37		450C-45
	544A-6		508C-41		450D-43
67288-92E60	517A-6		508D-39		508A-44
	544A-12	67296-92E00	518A-24		508B-41
67288-92E70	517A-16	67296-92E11	450C-14		508C-45
67288-94320	450A-48		450D-12		508D-43
	450B-45		508C-14	67298-92E50	517A-2
	450C-49		508D-12	67320-93J00	515A-5-1

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
67320-93J10	515A-5-2		508B-26		303A-10
67320-93J20	515A-5-3		508C-30		303B-8
67320-93J30	515A-5-4		508D-28	01547-0640A	175A-4
67320-93J40	515A-5-5	77811-58J10-0PG	420A-13	01550-0512C	303A-11
67320-93J50	515A-5-6		420B-13		303B-9
67320-93J60	515A-5-7		420C-13	01550-06127	553A-8
67320-93J70	515A-5-8		420D-11	01550-0612C	122A-12
67320-93J80	515A-5-9		420E-13		122B-12
67341-94L00	410B-31		420F-13		122C-12
	410C-31		420G-13		122D-12
	513A-21		420H-13		322A-15
67343-94L00	513B-21		420J-11		322B-12
	410B-35				322C-12
	410C-34				322D-13
	513A-35			01550-06167	301A-14
	513B-35				301B-14
67467-89J01	166B-15				301C-14
	206B-19	90000			513B-40
	513A-22				561A-9
	513B-22			01550-0616A	175A-9
67500-88L00	519A-1	95569-78040	146C-20	01550-0616C	146A-19
	544A-21		146D-20		146A-44
67701-94L00	442A-2	99000-81158-50M	167A-8		146B-19
	575A-2	99011-94L80-055	420A-15		146B-44
67721-94L00	442A-3		420B-15		146C-27
	575A-3		420E-15		146C-52
67725-96J00	442A-4		420F-15		146D-27
	575A-4		420G-15		146D-52
67726-99E00	442A-5	99011-94LA0-055	420C-15		166A-6
	575A-5		420H-15		167A-14
67728-99E00	442A-6	99011-94LC0-055	420D-13		175A-13
	575A-6		420J-13		301B-19
68111-88L00	544A-8				303A-12
69711-91J01	167A-15-2				303B-10
69711-93E11	167A-15-1				410A-25
69911-91J51	335A-20				410B-25
	335B-12				410C-25
	335C-20	00000			410D-25
	335D-13				410E-25
				01550-06207	310A-5
		01421-08357	122A-4		310A-14
			122B-4		310B-5
			122C-4		310B-14
			122D-4		310C-5
		01547-0612A	111A-11		310C-14
77811-54GB0-0PG	450A-29	01547-06167	513A-32		310D-5
	450B-26		513B-32		310D-14
	450C-30	01547-0616C	410B-32		310E-5
	450D-28		410C-32		310E-14
	508A-29	01547-0625A	121A-9		553A-10

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
01550-0620C	561A-22	01550-08257	410D-26	08211-15204	220C-7-4
	120A-15		410E-26		220A-7-6
	163A-4		301A-15		220B-7-6
	310A-8		301B-15		220C-7-6
	310B-8	01550-0835C	301C-15	08221-30404	220A-12-1
	310C-8		561A-10		220B-12-1
	310D-8		122A-5		220C-12-1
	310E-8		122B-5	08310-00067	301A-16
	334A-8		122C-5		301B-16
	334B-7		122D-5		301C-16
	334C-7		139A-3		561A-11
01550-06257	334D-7	01550-08707	139A-5	08316-10067	122A-13
	334E-8	02112-06127	206A-22		122B-13
	310A-9		206B-18		122C-13
	310B-9		206C-22		122D-13
	310C-9	02122-04127	120A-9	08316-10087	122A-6
	310D-9	03112-0630B	501A-11		122B-6
	310E-9		501B-11		122C-6
	513A-33	03121-0516A	530A-26		122D-6
01550-0625C	513B-33	03122-05169	530A-14	08321-01067	301A-17
	111A-12	03142-0416C	210A-7		301B-17
	144A-8		210B-7		301C-17
	146A-45		210C-7	08322-01067	561A-12
	146B-45	03142-04259	160A-12		310A-21
	146C-53		160B-12		310B-21
	146D-53		160C-12		310C-21
	166B-13	03142-05169	530B-7	08341-31039	310D-21
	206A-21		530B-16		310E-21
	206B-17		530B-25		120A-10
	206C-21		530B-32		120A-11
01550-0630C	146A-20	03542-05169	322A-16	09100-06113	303A-13
	146B-20		322B-13		303B-11
	146C-28		322C-13		336A-22
	146D-28		322D-14		336B-26
	162A-3		420A-4		336E-22
	166A-7		420B-4		339A-10
	167A-9		420C-4		501B-26
	113A-4		420D-4	09100-06165	335A-9
01550-06357	146A-21		420E-4		335C-9
	146B-21		420F-4		450A-45
	146C-29		420G-4		450B-42
	146D-29	04211-11129	420H-4		450C-46
01550-0645C	166B-14		420J-4		450D-44
	513A-34		111A-4		508A-45
	513B-34		113A-5		508B-42
01550-0820C	113A-8	08113-60060	407A-18		508C-46
	139A-10		407B-18		508D-44
	410A-26		407C-18	09100-10309	335A-21
	410B-26	08211-15203	220A-7-4		335C-21
	410C-26		220B-7-4		338A-24

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
09100-12093	339A-11	09116-06234	407B-19	09119-08L01	405B-16
	335B-13-1		407C-19		405C-16
	335D-14-1		206A-9		113A-3
	335B-13-2		206C-9		518A-26
09100-12132	335D-14-2	09116-06517	146A-10	09125-04004	517A-7
09103-06237	432A-11		146B-10	09125-05042	518A-20
	139A-8		146C-10		545A-21
	335A-15		146D-10	09125-05046	327B-5
09103-06281	335B-11	09116-06522	410A-8	09125-05135	519A-2
	335C-15		410A-22		544A-22
	335D-11		410B-8	09125-05145	444A-28
	336A-11		410B-22		444B-28
	336B-15		410C-8		336A-7
	336C-13		410C-22		336B-10
	336D-9		410D-8	09125-06063	336C-20
	336E-11		410D-22		336D-27
	336F-9	09116-06523	410E-8		336E-7
	338A-29		410E-22		336F-27
	339A-12		410A-3		338A-30
	407A-12		410B-3	09126-06006	545A-25
09103-08458	407B-12	09116-06526	410C-3	09126-06015	444A-17-1
	407C-12		410D-3		444B-17-1
	120A-7		410E-3	09126-06027	444A-17-2
	335B-18		122A-28		444B-17-2
09106-10065	335D-19		122B-27	09128-06093	310A-20
09108-06149	160A-14		122C-28		310B-20
	160B-14		122D-27		310C-20
	160C-14		407A-13-1		310D-20
09108-08104	405C-19	09116-08137	407B-13-1		310E-20
	336B-9		407C-13-1		561A-8
	336C-8		407A-13-2	09136-05041	444A-18
	513A-23		407B-13-2		444A-27
09116-06223	513B-23	09116-08150	407C-13-2		444B-18
	410A-29		401A-3		444B-27
	410B-29	09116-08151	405A-7	09137-03008	334A-12
	410C-29		405B-7		334B-11
09116-06225	410D-29		405C-7		334C-11
	410E-29		444A-16		334D-11
	206A-26	09116-08152	444B-16	09140-05005	334E-12
	206B-25		139A-4		166B-10
	206C-26		401A-10		327B-7
	336A-35	09116-08154	405A-15		513A-24
	336D-18		405B-15		513B-24
	336E-35		405C-15		519A-3
	336F-18		407A-6		544A-24
	410B-36		407B-6	09140-06020	336A-23
	410C-35		407C-6		336B-27
	513A-36		444A-29		336E-23
	513B-36	09116-08155	444B-29		339A-13
09116-06229	407A-19		405A-16		450A-47

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
	450B-44		513B-27		335D-23
	450C-48	09160-06055	166B-16	09160-12126	335B-16
	450D-46		206B-20		335D-17
	508A-47		513A-28	09160-12128	335B-15
	508B-44		513B-28		335D-16
	508C-48	09160-06082	160A-15	09160-14028	407A-26
	508D-46		160B-15		407B-26
	518A-10		160C-15		407C-26
	545A-10		206A-11-1	09160-14071	206A-13
09140-08016	407C-28		206B-10-1		206B-11
09140-10031	401A-11		206C-11-1		206C-13
09140-14008	303A-7		210A-12	09160-15030	220A-7-1
	303B-5		210B-12		220B-7-1
09141-14008	407A-25		210C-12		220C-7-1
	407B-25		335A-10	09160-15031	220A-7-2
	407C-25		335C-10		220B-7-2
09148-06008	444A-13		336A-24		220C-7-2
	444B-13		336B-28	09160-15032	220A-7-3
09159-08046	220A-6		336C-21		220B-7-3
	220B-6		336D-28		220C-7-3
	220C-6		336E-24	09160-15033	220A-7-5
09159-08059	336B-11		336F-28		220B-7-5
	336C-9	09160-06094	206A-12		220C-7-5
	513A-25		206C-12	09160-15053	220A-7-7
	513B-25	09160-06104	517A-20		220B-7-7
09159-08L02	336A-36	09160-06170	336C-22		220C-7-7
	336D-19		336D-29	09160-15054	220A-7-8
	336E-36		336F-29		220B-7-8
	336F-19	09160-06175	432A-12		220C-7-8
09159-10050	335A-22	09160-06176	206A-11-2	09160-15057	303A-8
	335B-19		206B-10-2		303B-6
	335C-22		206C-11-2	09160-20068	220A-11-1
	335D-20	09160-08082	336B-8		220B-11-1
09159-12014	335B-14		336C-7		220C-11-1
	335D-15		407C-29	09160-20069	220A-11-2
09159-22006	335A-8		513A-19		220B-11-2
	335B-8		513B-19		220C-11-2
	335C-8	09160-09020	120A-8	09160-20070	220A-11-3
	335D-8	09160-10082	335B-20		220B-11-3
09160-05024	545A-45		335B-21		220C-11-3
09160-05029	206B-9		335D-21	09160-20071	220A-11-4
	513A-26		335D-22		220B-11-4
	513B-26	09160-10139	335A-23		220C-11-4
	519A-4		335C-23	09160-20072	220A-11-5
	544A-23	09160-10140	335A-24		220B-11-5
09160-06046	166A-4		335C-24		220C-11-5
	166B-11	09160-10156	401A-12	09160-20073	220A-11-6
	206A-10	09160-10158	338A-25		220B-11-6
	206C-10		339A-14		220C-11-6
	513A-27	09160-12066	335B-22	09160-25032	220A-13-4

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
	220B-13-4		310B-6		407B-5
09160-25033	220C-13-4		310C-6		407C-5
	220A-13-5		310D-6	09204-01002	206A-8
	220B-13-5		310E-6		206B-8
	220C-13-5	09180-06105	515A-2		206C-8
09160-25034	220A-13-6	09180-06186	206A-15		336A-26
	220B-13-6		206C-15		336B-30
09160-25035	220C-13-6	09180-06230	146A-13		336E-26
	220A-13-7		146B-13		513A-18
	220B-13-7		146C-13		513B-18
	220C-13-7		146D-13	09204-01006	336C-23
09160-30057	336A-8		166A-5		336D-30
	336B-12		166B-12		336F-30
	336C-10		513A-29	09204-03003	407A-27
	336D-6		513B-29		407B-27
	336E-8	09180-06342	335A-11		407C-27
09161-04012	336F-6		335C-11	09205-02004	210A-4
	410A-12	09181-16008	220A-10		210B-4
	410B-12		220B-10		210C-4
	410C-12		220C-10	09205-04002	206A-16
	410D-12	09181-25190	220A-13-1		206B-12
09161-08019	410E-12		220B-13-1		206C-16
	336A-37		220C-13-1	09205-06021	335A-6
	336D-20	09181-25248	220A-13-2		335B-6
	336E-37		220B-13-2		335C-6
	336F-20		220C-13-2		335D-6
09163-06001	444A-19	09181-25251	220A-13-3	09209-08016	220A-17
	444B-19		220B-13-3		220B-17
09164-12021	121A-8		220C-13-3		220C-17
09164-14008	206A-14	09181-25268	220A-13-8	09229-04005	410A-18
	206C-14		220B-13-8		410B-18
09166-17005	220A-3		220C-13-8		410C-18
	220B-3	09181-30158	220A-12-2		410D-18
	220C-3		220B-12-2		410E-18
09168-12017	405A-9		220C-12-2		420A-6
	405B-9	09181-30162	220A-12-3		420B-6
	405C-9		220B-12-3		420C-6
09169-06062	146A-12		220C-12-3		420D-6
	146B-12	09200-06072	336A-25		420E-6
	146C-12		336B-29		420F-6
	146D-12		336E-25		420G-6
09169-06075	122A-29	09202-05021	220A-16		420H-6
	122B-28		220B-16		420J-6
	122C-29		220C-16	09248-08001	407A-14
	122D-28	09202-06023	401A-4		407B-14
	146A-11		405A-8		407C-14
	146B-11		405B-8	09248-12009	405A-10
	146C-11		405C-8		405B-10
	146D-11		405C-20		405C-10
09169-06095	310A-6		407A-5	09250-12016	444A-30

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
09251-09007	444B-30		336C-11	09367-06006	146C-21
	410A-17		336D-7		146D-21
	410B-17		336E-9	09380-12002	336A-43
	410C-17		336F-7		336B-36
	410D-17	09283-27022	121A-2		336E-43
09260-10006	410E-17	09283-32048	116A-9		338A-27
	206A-17	09289-05008	121A-16	09381-14004	339A-15
	206B-13	09289-20L01	407A-17		206A-18
	206C-17		407B-17		206B-14
	407A-3		407C-17		206C-18
09263-20046	407B-3	09320-05019	120A-14	09381-16001	116A-4
09263-20047	407C-3	09320-08515	310A-7	09383-04002	206A-19
	407A-16		310B-7		206B-15
	407B-16		310C-7		206C-19
	407C-16		310D-7	09385-04003	410A-19
	220A-4		310E-7		410B-19
09265-17002	220B-4	09320-09052	146A-14		410C-19
09265-25047	220C-4		146B-14		410D-19
	407A-4		146C-14		410E-19
	407B-4		146D-14	09385-06012	513A-30
	407C-4		122A-30		513B-30
09280-06012	210A-13		122B-29	09385-06016	166B-17
	210B-13		122C-30		206B-21
	210C-13		122D-29	09401-06406	146C-22
09280-12012	175A-8	09320-11017	410A-7		146D-22
09280-13005	210A-14		410A-23	09401-08412	146A-18
	210B-14		410B-7		146B-18
	210C-14		410B-23		146C-23
	111A-9		410C-7		146D-23
09280-17003	175A-12		410C-23	09401-08413	162A-6
09280-21008	139A-9		410D-7	09401-11423	122A-11
09280-22019	146A-37		410D-23		122B-11
	146B-37		410E-7		122C-11
	146C-45		410E-23		122D-11
	146D-45	09343-50L01-060	146A-15		146A-34
	220A-23		146B-15		146A-38
09280-50009	220B-23		146C-15		146B-34
	220C-23		146D-15		146B-38
	160A-16	09344-55001-070	146A-16		146C-42
	160B-16		146B-16		146C-46
	160C-16		146C-16		146D-42
09280-75002	407A-20		146D-16		146D-46
	407B-20	09352-70104-600	410B-37	09401-11425	144A-7
	407C-20		410C-36		146A-39
	401A-5		513A-37		146B-39
	220A-22		513B-37		146C-47
09282-15009	220B-22	09355-70125-600	122A-9		146D-47
	220C-22		122B-9	09401-15414	111A-10
	336A-9		122C-9	09401-20409	146A-40
	336B-13		122D-9		146B-40

PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.	PART NO.	FIG.NO.-REF.NO.
09401-23413	146C-48		322C-11		501B-14
	146D-48		322D-12	09471-12077	501A-16
	146A-46	09408-00020	310A-13		501B-16
	146B-46		310B-13	09471-12103	501A-2
	146C-54		310C-13		501A-4
09401-26408	146D-54		310D-13		501A-20
	146A-41	09408-00043	310E-13		501B-2
	146B-41		146A-42		501B-4
	146C-49		146B-42		501B-20
	146D-49		146C-50	09471-12108	501B-24
09403-07340	327A-6		146D-50	09481-10501	322B-5
09403-08417	327B-9	09408-00054	322A-17		322C-5
	322A-12		322B-14		450A-53
	322B-9		322C-14		450B-50
	322C-9		322D-15		450C-54
	322D-10		146C-24		450D-52
09403-13413	334C-14		146D-24		508A-53
	334D-14	09408-00198	146C-25		508C-54
	322A-13		146D-25		513A-13
	322B-10		146A-43		513B-13
	322C-10		146B-43	09481-30501	322A-8
09403-20308	322D-11		146C-51		322B-6
	513A-38		146D-51		322C-6
	553A-9	09408-00262	146C-26		322D-6
	561A-23		146D-26		513A-14
09404-06032	338A-31	09409-05302-5PK	410A-24		513B-14
09407-08401	530A-8		410B-24	09482-00661	561A-19
	530A-28		410C-24		111A-13
	553A-6		410D-24		
	303A-9		410E-24		
	303B-7	09440-07074	220A-18		
09407-14403	334A-13		220B-18		
	334B-12		220C-18		
	334C-12	09440-07080	206A-20		
	334D-12		206B-16		
09407-14407	334E-13		206C-20		
	338A-32	09440-12027	444A-20		
	501A-8		444B-20		
	501B-8		336C-24		
	501B-27		336D-31		
09407-18402	513A-31		336F-31		
	513B-31	09440-35004	220A-19		
	553A-7		220B-19		
	600A-26		220C-19		
	600B-20		336C-25		
09408-00008	322A-2		336D-32		
	322D-2		336F-32		
	561A-21	09471-12028	501A-6		
	322A-14		501A-14		
	322B-11		501B-6		

SUZUKI **DF25A/30A** PARTS CATALOGUE

SUZUKI MOTOR CORPORATION All rights reserved

No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Suzuki Motor Corporation.

SUZUKI MOTOR CORPORATION

Service Material Development Group, Automobile & Motorcycle Service Engineering Dept.
300 Takatsuka, Minami, Hamamatsu, Japan

SUZUKI MOTOR CORPORATION